
MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG WITH SOCKET CONTACTS, 3.315 INCHES LENGTH, 2 KEYING PINS, FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-55302.

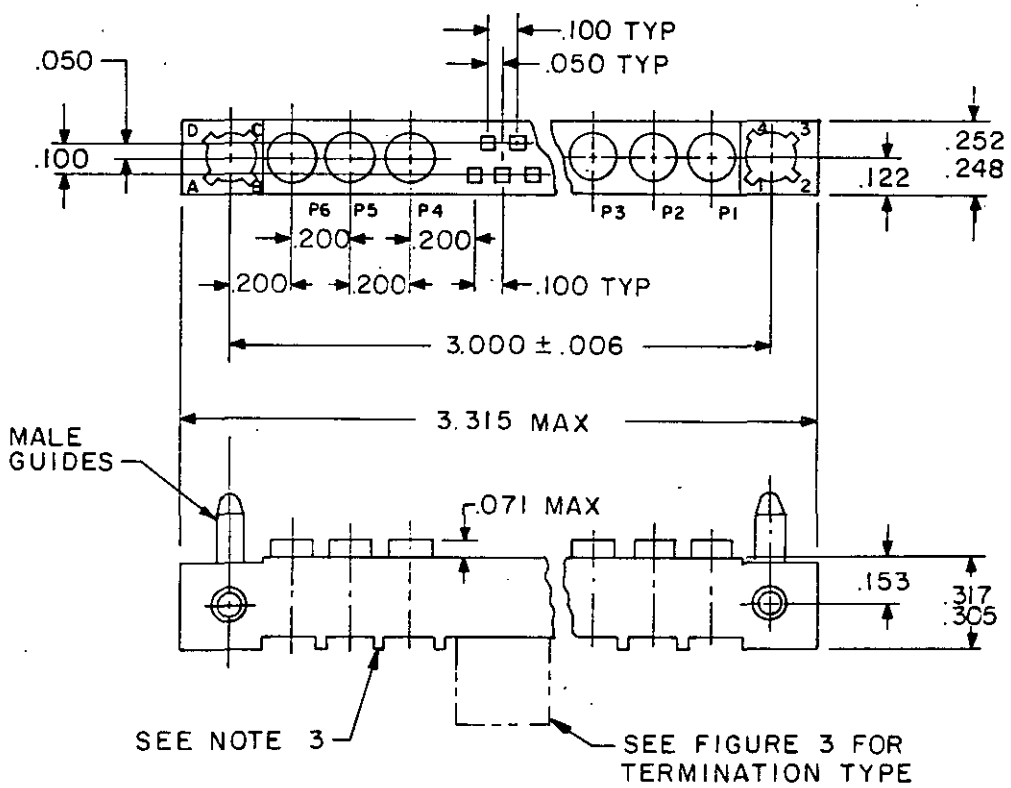


INCHES	MM	INCHES	MM
.006	0.15	.248	6.30
.050	1.27	.252	6.40
.071	1.80	.305	7.75
.100	2.54	.317	8.05
.122	3.10	3.000	76.20
.200	5.08	3.315	84.20

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Standoffs are located between each cable hole and between each hole and contact hole set.


FIGURE 1. Connector, plug (.100 inch spacing).

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

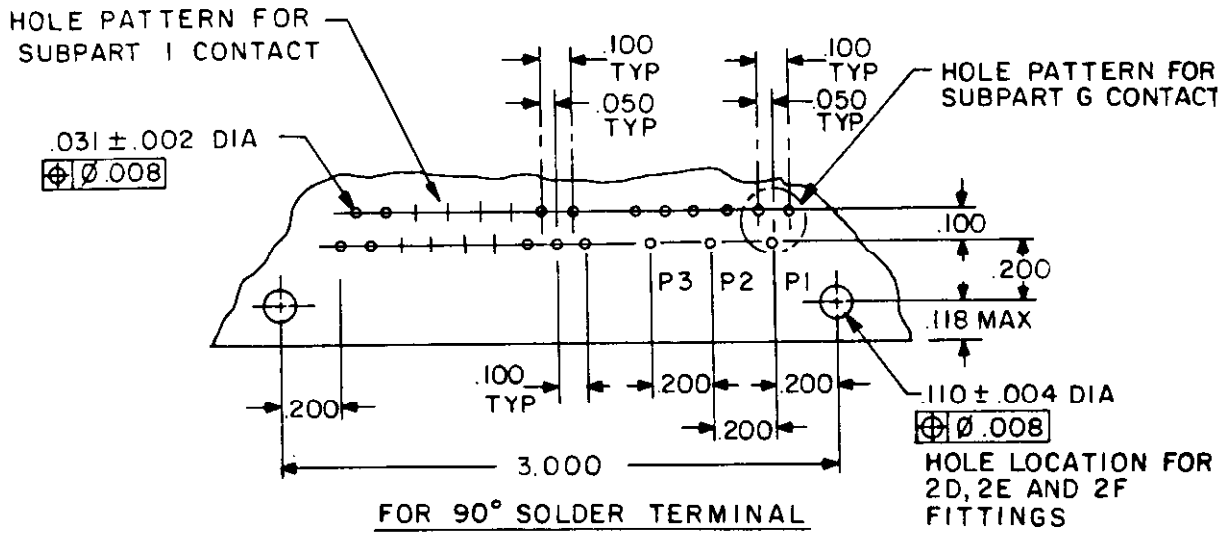

FOR 90° SOLDER TERMINAL

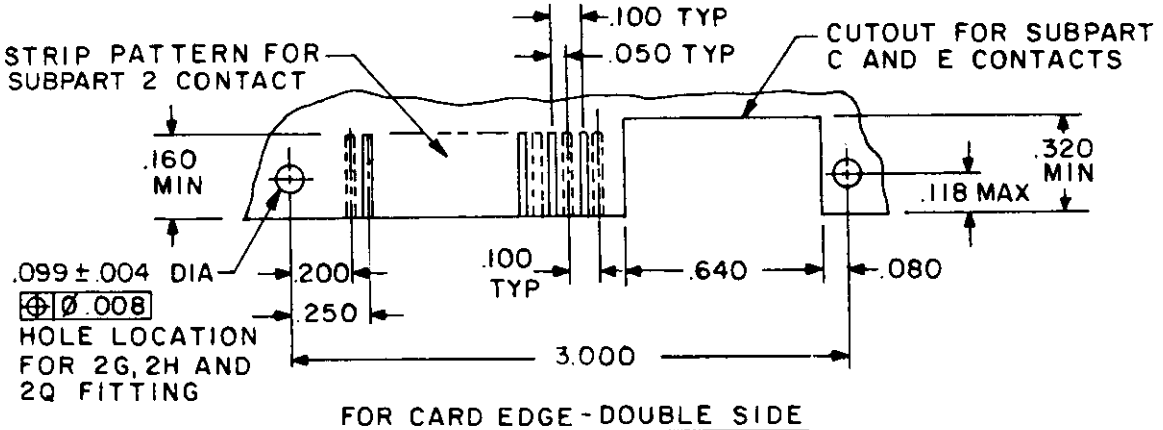

FOR CARD EDGE - DOUBLE SIDE

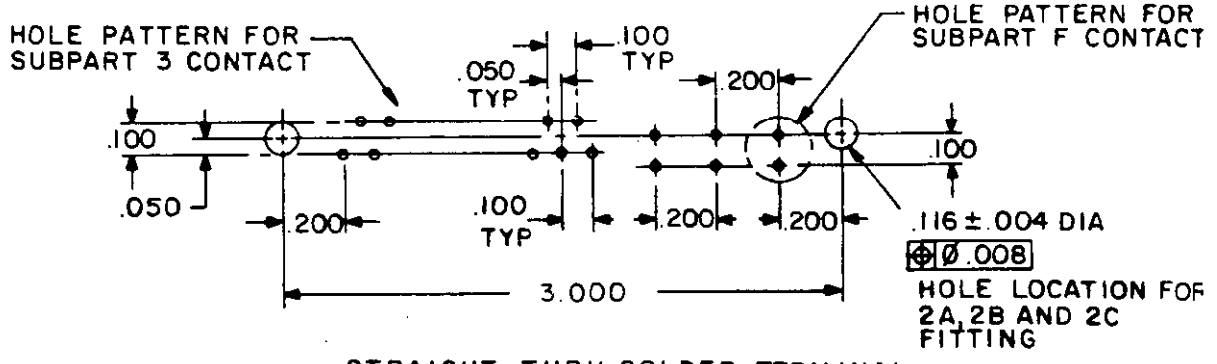


STRAIGHT-THRU SOLDER TERMINAL


INCHES	MM	INCHES	MM	INCHES	MM
.002	0.05	.099	2.51	.200	5.08
.004	0.10	.100	2.54	.250	6.35
.008	0.20	.110	2.79	.320	8.13
.031	.079	.116	2.95	.640	11.26
.050	1.27	.118	3.00	3.000	76.20
.080	2.03	.160	4.06		

FIGURE 2. Recommended hole patterns.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.




Part number
M55302/152-A



Part number
M55302/152-B

FIGURE 3. Contact arrangements and keying configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

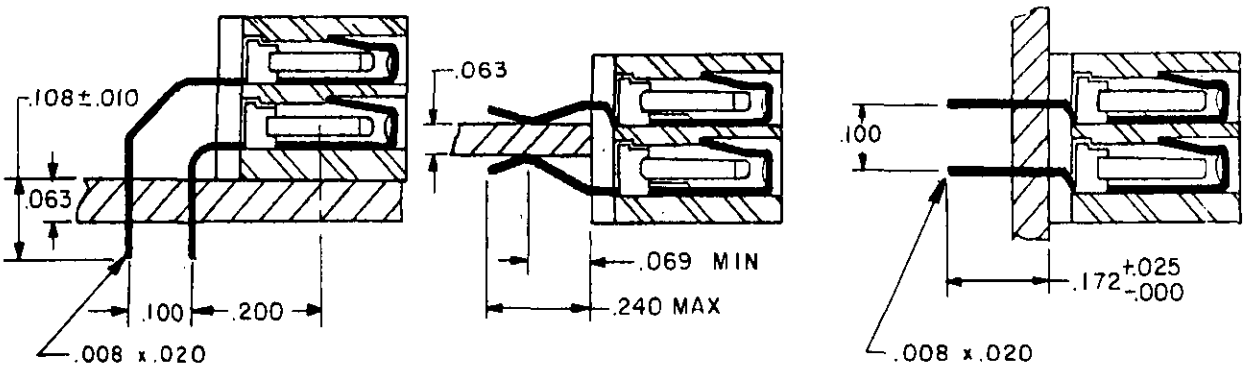

Subpart 1
90° Solder tails


Subpart 2
Card edge

Subpart 3
Solder tails



Subpart 4
Solder terminals

Subpart 5
Crimp 24-28 AWG

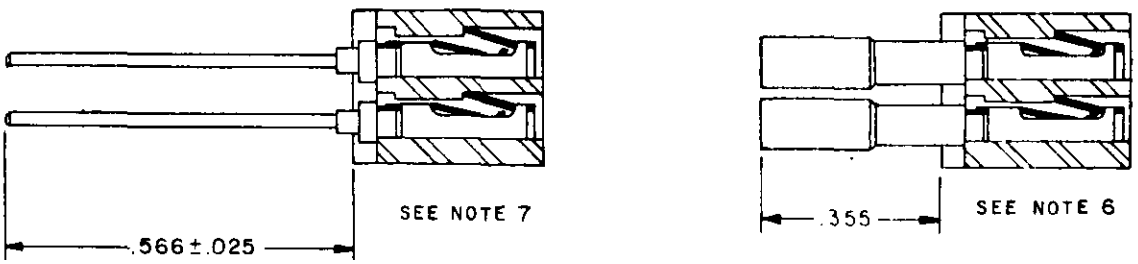

Subpart 6
Wire wrappost


Subpart 7
Crimp 22 AWG

INCHES	MM	INCHES	MM	INCHES	MM
.008	0.20	.069	1.75	.200	5.08
.010	0.25	.100	2.54	.220	5.59
.020	0.51	.108	2.74	.240	6.10
.025	0.64	.157	3.99	.355	9.02
.063	1.60	.172	4.37	.566	14.38


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. Contact accepts no. 22 AWG wire.
5. Contact, crimp type, accepts no. 22-26 AWG wires.
6. Contact, crimp type with insulation support barrel, accepts no. 22-26 AWG wire.
7. Contact with .025 (0.64 mm) wrappost per MIL-STD-1130.

FIGURE 4. Contact terminations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

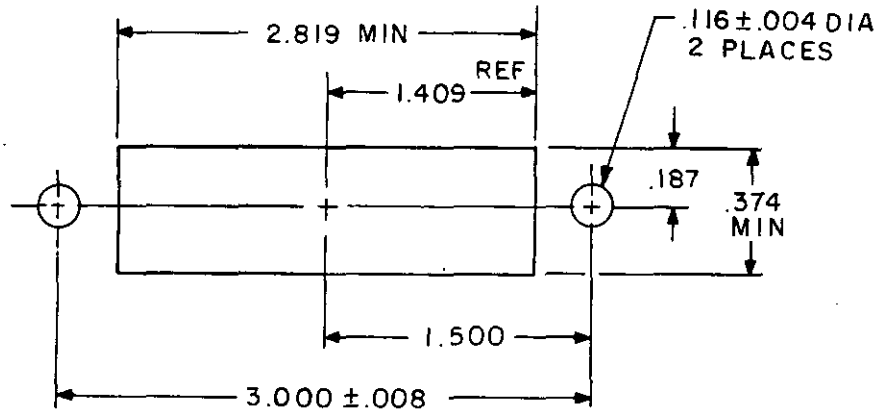

FIXED MOUNT

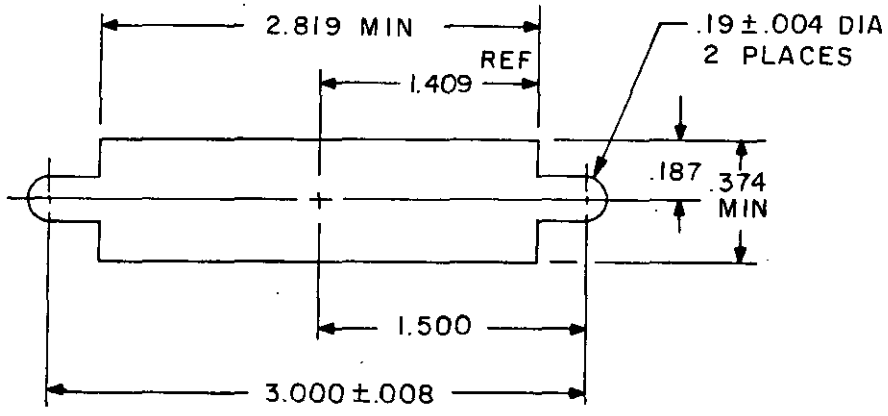

FLOATING MOUNT

INCHES	MM	INCHES	MM
.004	0.10	.374	9.50
.008	0.20	1.409	35.79
.116	2.95	1.500	38.10
.187	4.75	2.819	71.60
.19	4.8	3.000	76.20

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 5. Recommended panel cutouts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures.

Material and finish:

Insulator: Flame retardant diallyl phthalate, per MIL-M-14, type SDGF.

Contact identification: See figure 3.

Contact retention: 4 pounds minimum per contact.

Contact engagement: 0.7 ounce minimum, 4 ounces maximum.

Contact separation: 0.5 ounce minimum.

Contact resistance: The contact resistance shall not exceed 12 milliohms.

Dielectric withstanding voltage:

Sea level: 1,000 V rms, 60 Hz.

High altitude: 300 V rms, 60 Hz.

Current rating, maximum: 2.5 amperes at 25°C.

Keying pin: Moldings and mounting hardware provide 16 polarizing positions. Keys are constructed per M55302/154. Connectors are supplied with keying pins in the "1" and "A" positions. When required, connectors can be easily keyed to the desired positions by using a standard wrench or screwdriver.

Crimping tools (for subpart 5 and 7):

Basic tool: M22520/2-01.

Positioner: M22520/2-37.

Removal tools:

Power contacts (for subpart 5 and 7): See M81969/40-01.

RF coax contacts: See M81969/41-01.

Hood types: See MIL-C-55302/155.

Mounting hardware: See MIL-C-55302/154, table I, plug.

Mating connectors: Shall conform to MIL-C-55302/147.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

Part number: Consists of the letter M, the basic number of the specification sheet, and a dash number compiled as follows:

Example:

M55302/152 * * * 2 *

Specification sheet number
Receptacle with pin contacts

Contact arrangement
(see figure 3)

Contact type - 2.5 amperes
(see figure 4)
0 - not applicable

Contact type - Coaxial
X - less coaxial contact

Indexing type
2 - Square post (16 positions)

Mounting hardware
(See MIL-C-55302/154)

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities:
Army - AR, AT, AV, MI
Navy - AS, OS, SH
Air Force - 11, 85, 99
DLA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Army - CR

(Project 5935-3373-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.