INCH-POUND
MIL-C-55302/158B
1 June 1993
SUPERSEDING
MIL-C-55302/158A
9 April 1986

MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES RECEPTACLE SOCKET CONTACTS, 64 OR 96 CONTACT POSITIONS, FOR PRINTED WIRING BOARDS (100 INCH SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-C-55302


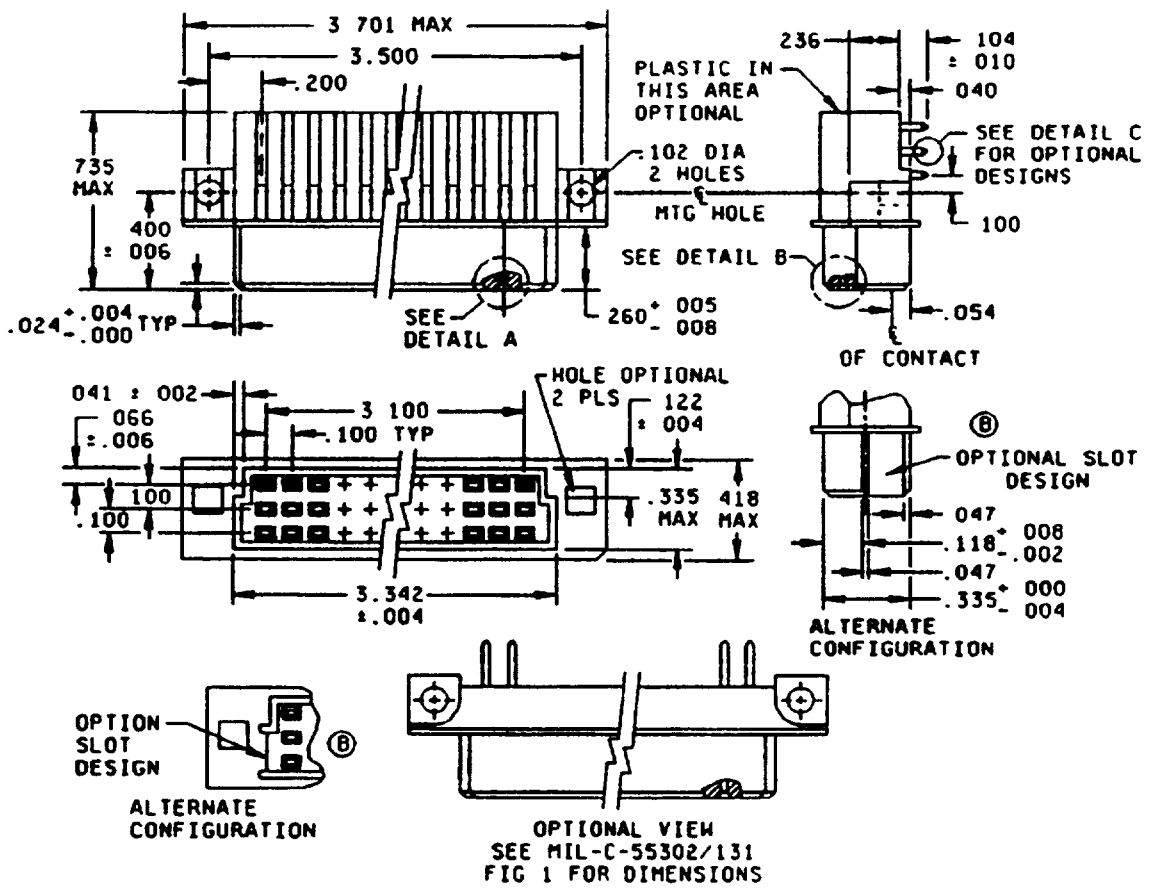


FIGURE 1 Connector, receptacle, .100 (2.54 mm) spacing


Ⓑ denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

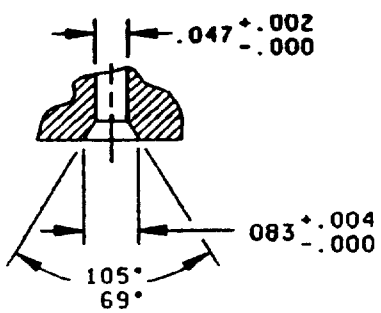

DETAIL A

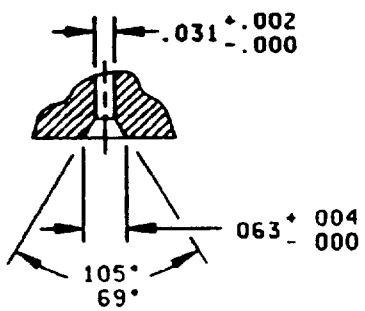

DETAIL B

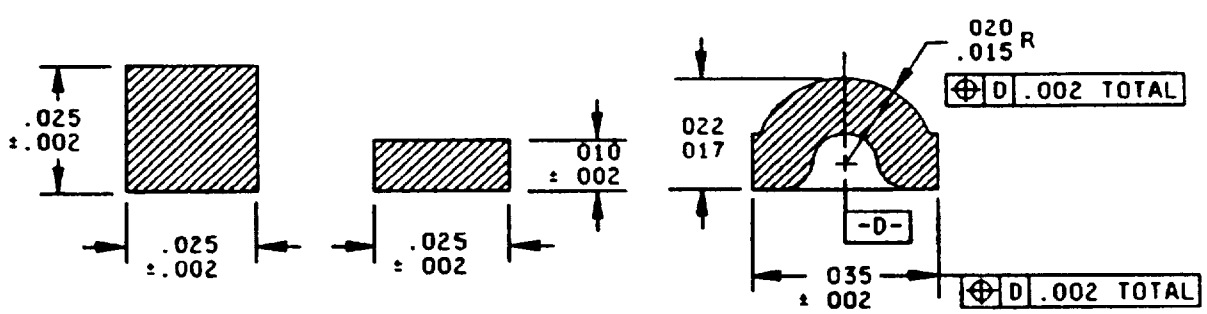


DETAIL C OPTIONAL DESIGNS FOR PRINTED CIRCUIT TAILS

FIGURE 1 Connector, receptacle, 100 (2 54 mm) spacing - Continued


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.



VIEW FROM TERMINATION END
CONNECTOR MARKING

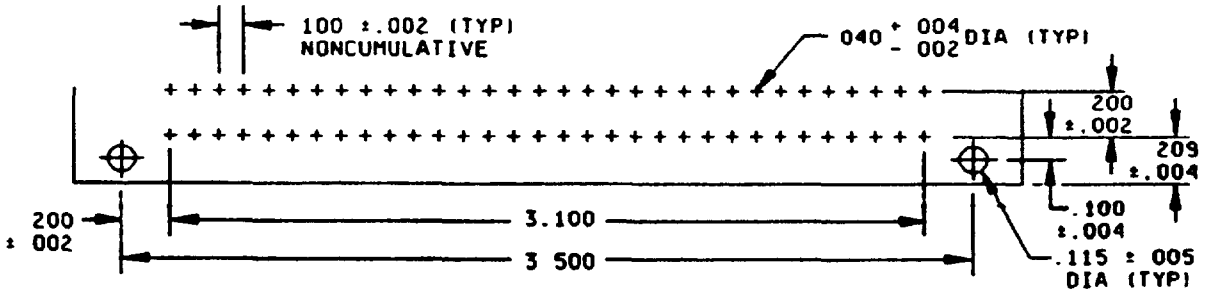

RECOMMENDED MOUNTING PATTERN 64 CONTACTS

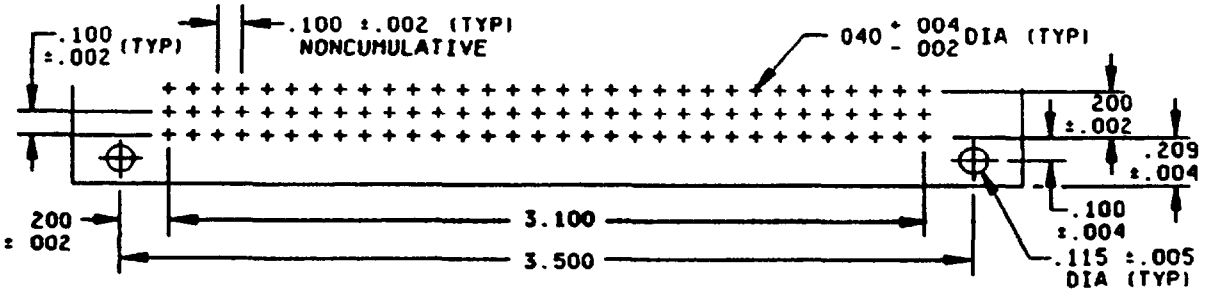

RECOMMENDED MOUNTING PATTERN 96 CONTACTS

FIGURE 1 Connector, receptacle, 100 (2.54 mm) spacing - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

Dash number M55302/158-	Number of contacts	Type of termination
01	96	Printed circuit tails 2/
02	64	Printed circuit tails 1/ 2/


1/ These connectors have middle row (row B) of contacts excluded
2/ Solder contact suitable for .062 or .093 thick printed wiring boards

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	.05	.020	51	047	1 19	110	2 79	.400	10.16
004	.10	022	56	.054	1.37	122	3 10	.418	10.62
.005	.13	.024	.61	.063	1.60	200	5 08	.735	18.67
.006	15	025	64	.066	1.68	209	5.31	3.100	78.74
.008	.20	.031	79	.083	2.11	.236	6 00	3.342	84.89
010	.25	.035	89	100	2 54	260	6 60	3 500	88.90
015	38	040	1 02	102	2 59	.335	8 51	3 701	94 01
017	.43	041	1 04	104	2 64				

NOTES
1. Dimension are in inches.
2. Metric equivalents are given for general information only
3 Unless otherwise specified, tolerance is ±.005 (13 mm).
4. These connectors mate with connectors specified in MIL-C-55302/157
5. Clearance must be provided around the top of the mounting hole for 2.5 mm hex nut.
6. Slots, openings, indentations etc that fall within the envelope dimensions and which do not affect form, fit or function are acceptable providing they do not prevent intermateability and are not used for polarizing purposes in military applications.


FIGURE 1 Connector, receptacle, 100 (2 54 mm) spacing - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

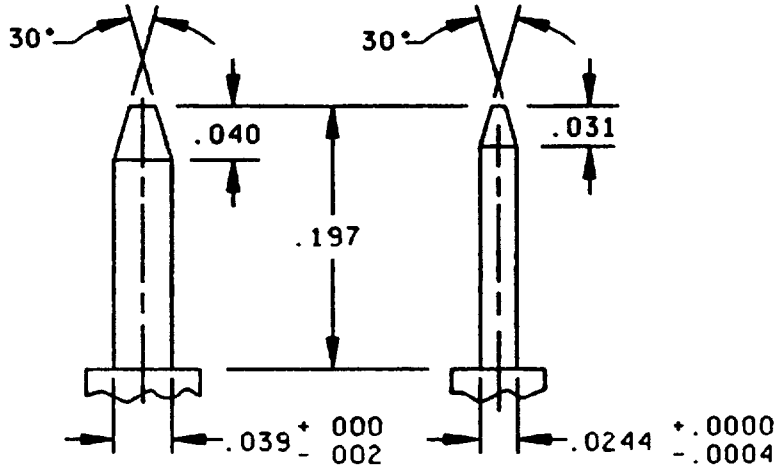

TEST PIN A

Inches	mm
0004	0 010
002	0 05
008	0 20
0220	0 559
0244	0 620
031	0 79
039	0 99
.040	1 02
.197	5 00

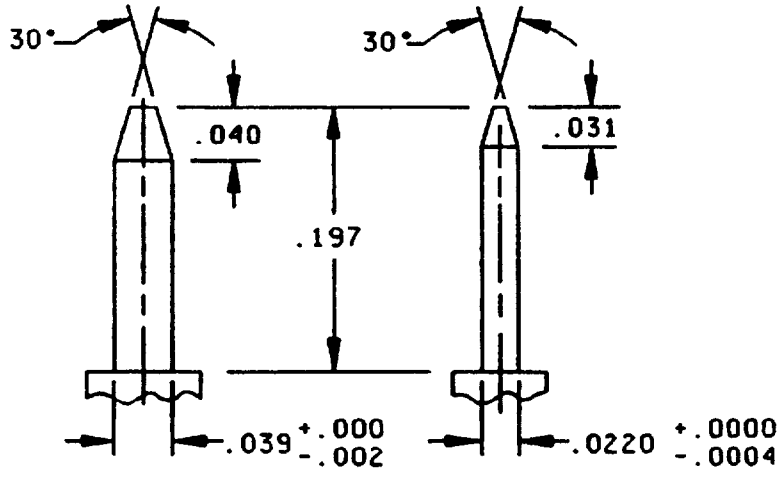


TEST PIN B

NOTES.
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerances are ±.008 (0 20 mm) on decimals and 2° on angles

FIGURE 2 Test pins

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

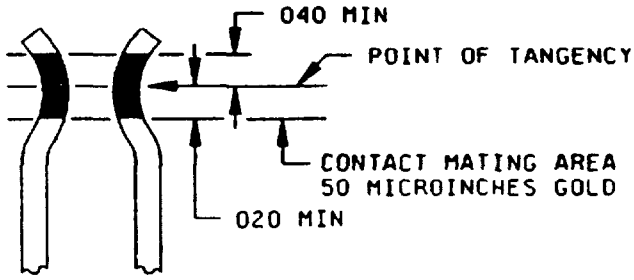

Inches	mm
.020	0.51
.040	1 02

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only

FIGURE 3. Contact plating

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction

Dimensions and configuration See figure 1

Material and finish

Contact plating The plating in the contact area shall be gold per MIL-G-45204, type II, grade C or D, class 1 over nickel plating per QQ-N-290, 30 to 150 microinches The contact mating area is defined in figure 3

Nonfunctional area: Any portion of the contact other than the contact mating area or termination area can be plated in accordance with paragraph 3 3 3 4 3 of MIL-C-55302

Contact identification See figure 1

Body design The insulator body of each receptacle may be two-piece construction secured by mechanical means

Contact separation force Separation force shall be 5 ounce minimum, using the following test pins

1 Insert and withdraw test pin A (see figure 2)
2 Insert test pin B (see figure 2) fully and withdraw test pin B 071 inch and then measure separation force.

Mating and unmating The maximum mating force, in pounds, shall not exceed a value equal to 0 25 times the number of contacts, and the withdrawal force, in pounds, shall be a minimum of 0 025 times the number of contacts and shall not exceed the measured insertion force, when the housing is loaded with contacts and mated with connector specified in MIL-C-55302/157.

Contact rating: 3.0 amperes maximum per contact

Contact resistance No individual contact pair shall have a resistance exceeding 020 ohm

Contact retention 3 pounds minimum per contact

Dielectric withstanding voltage

Sea level - 1,000 volts rms, 50 or 60 hertz

High altitude - 300 volts rms, 50 or 60 hertz

Part number: M55302/158- (dash number from figure 1)

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 17

Review activities
Army - AR, AT, AV, MI
Navy - AS, OS, SH
Air Force - 11, 85, 99
DLA - ES

User activities
Army - ME
Navy - MC
Air Force - 19

Preparing activity
Army - CR

Agent:
DLA - ES

(Project 5935-3870)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.