FED. SUP CLASS
5935

User activities: Army - AT
Navy - MC, CG, SH
Air Force -

Review activities: Army - MI
Navy - AS
Air Force - 11, 99
DLA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and/or repetitive use shall be made from this document when applicable.

APPROVED 13 June 1973 REVISED Ⓐ 12 October 1973 Ⓑ 13 November 1978 Ⓒ 5 December 1983

Ⓒ

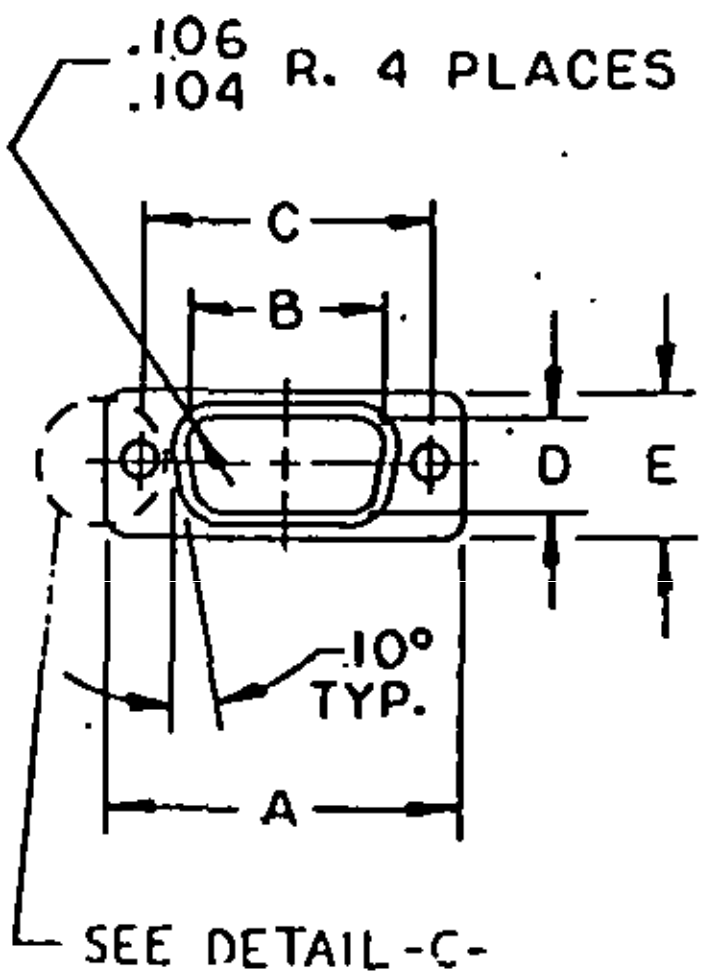

ENGAGING VIEW

Ⓒ

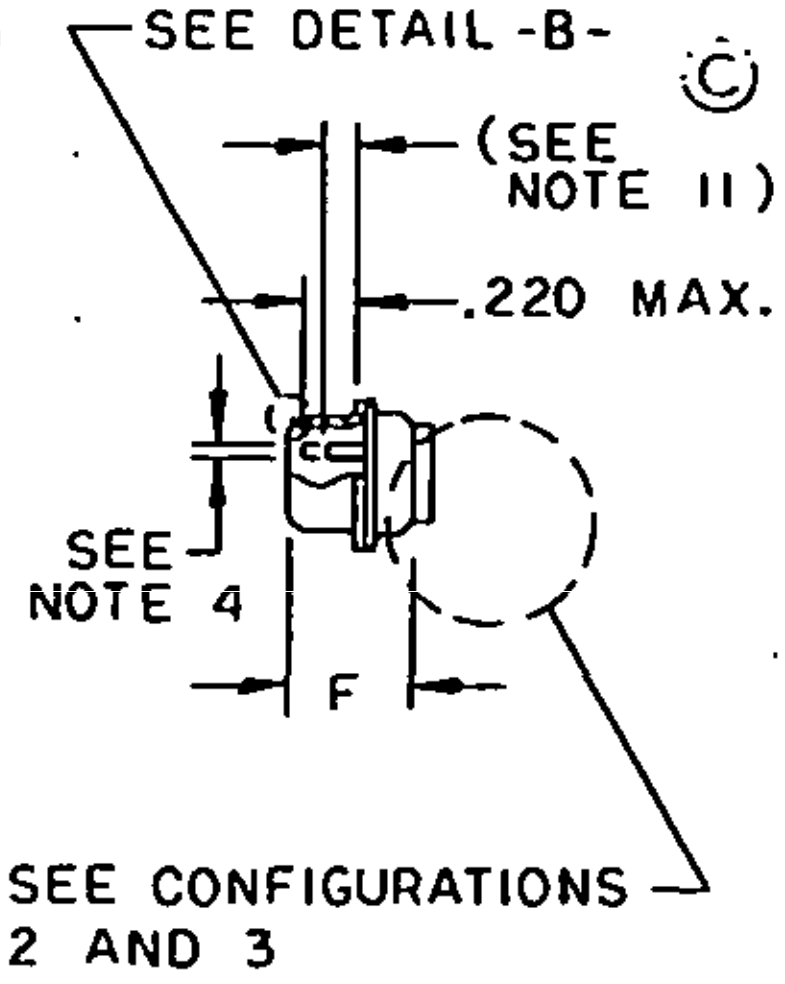

CONFIGURATION 1

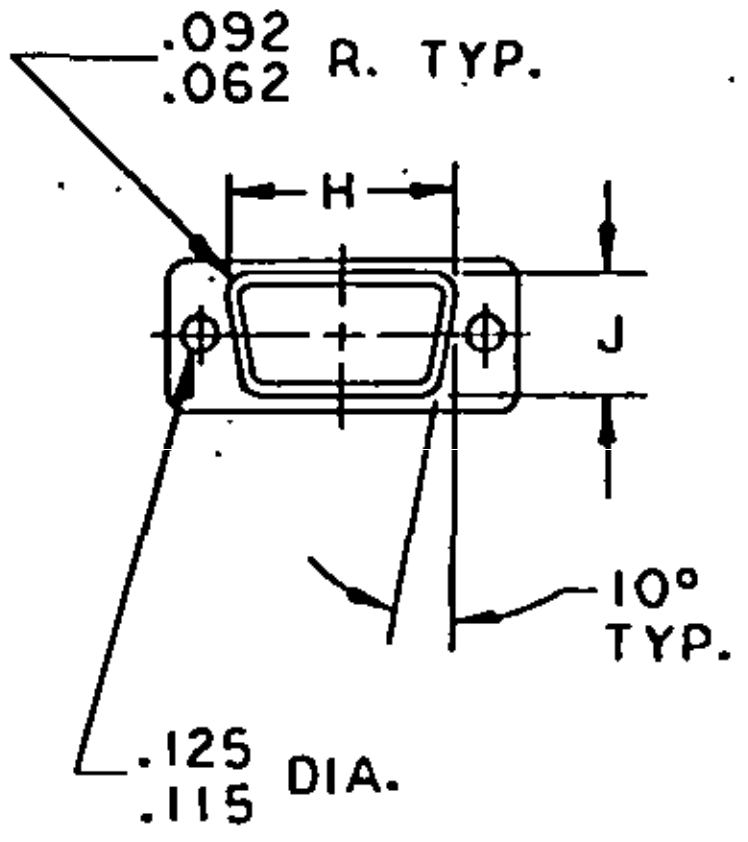

TERMINAL VIEW

Ⓒ



DETAIL -A-

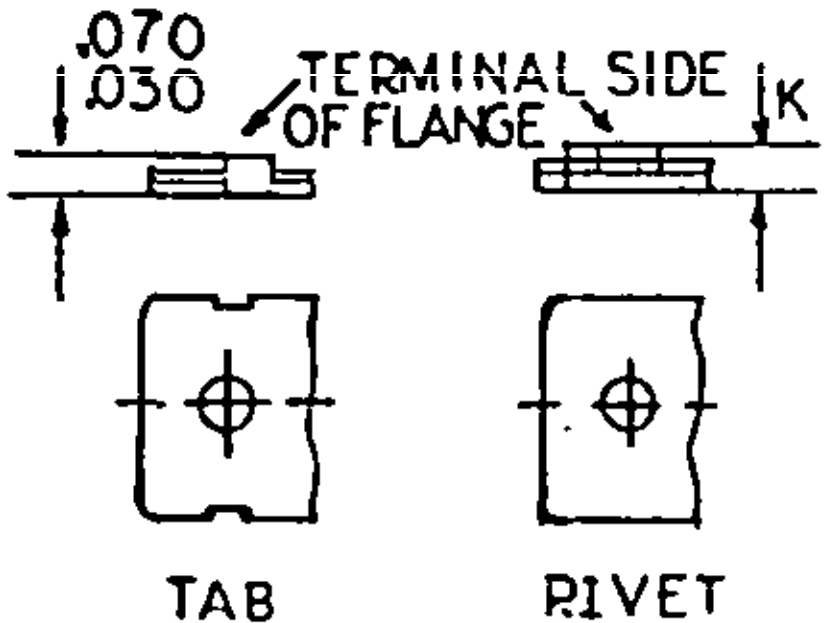

DETAIL-C-

Ⓒ

ALTERNATE METHODS OF SECURING SHELL HALVES

Ⓒ



DETAIL -B-

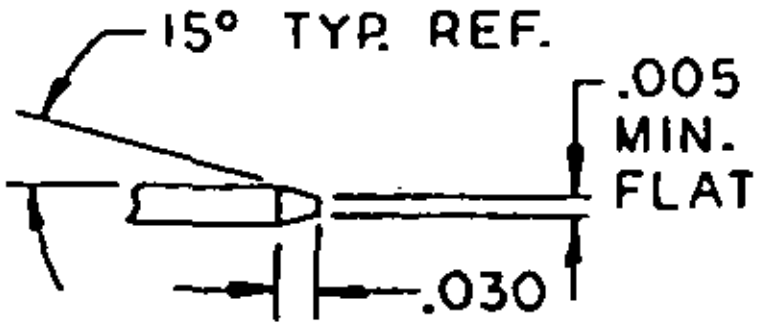

DETAIL -A-
(ALTERNATE)

Ⓒ

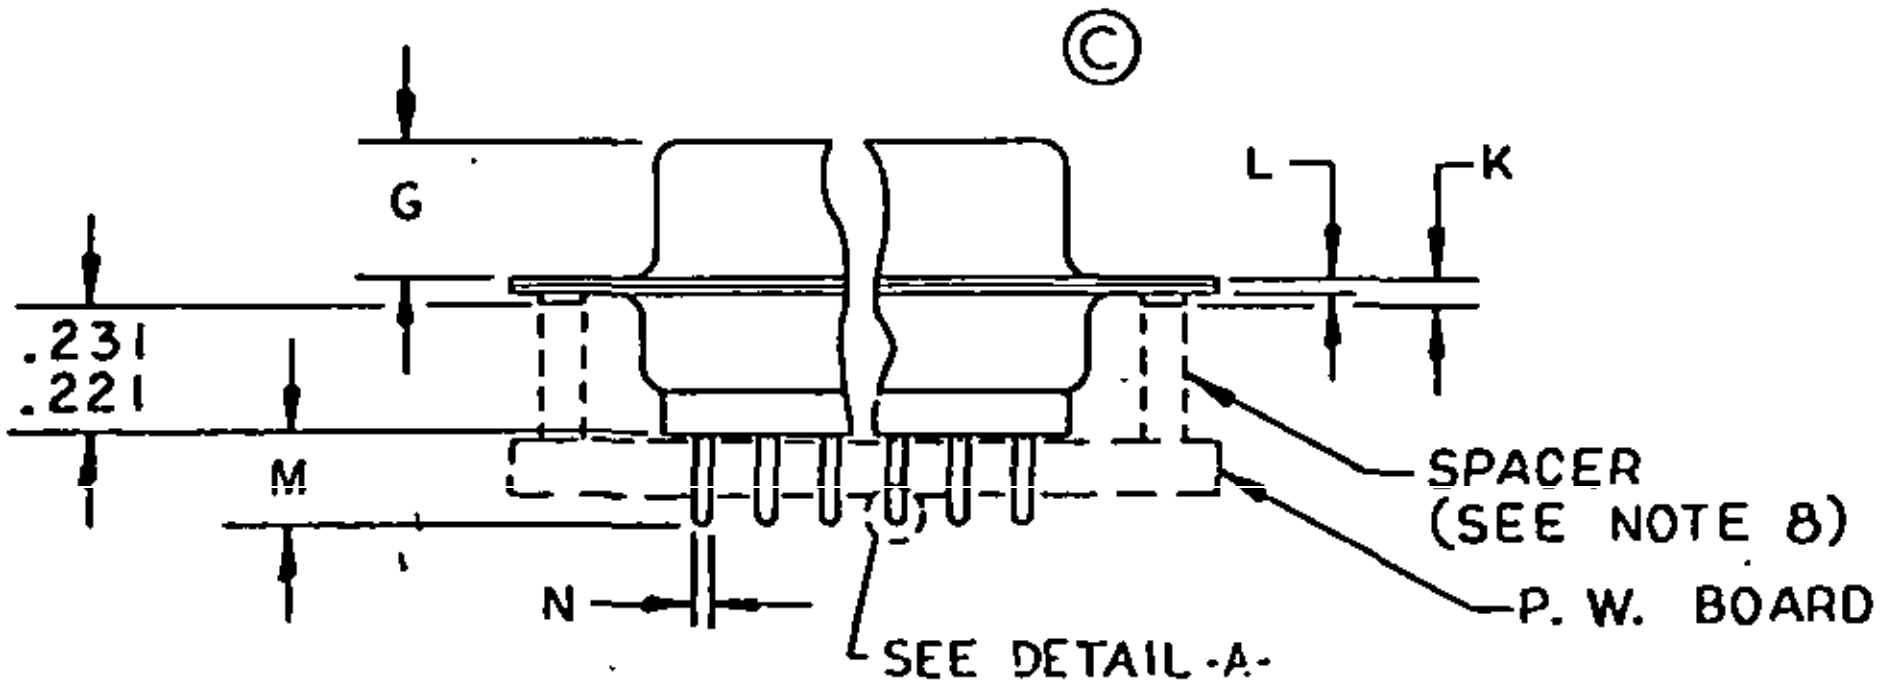

CONFIGURATION 2-STRAIGHT TAILS

Ⓒ DENOTES CHANGE

P.A NAVY-EC Other Cust AF-85 ARMY-CR	International Interest	TITLE CONNECTORS, ELECTRIC, RECTANULAR MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, PLUG, PIN CONTACTS, PRINTED WIRING BOARD TERMINATION TYPES	MILITARY STANDARD MS 14059
Procurement Specification MIL-C-24308		SUPERSEDES:	PAGE 1 OF 5

User activities: Army - AT
Navy - MC, CG, SH
Air Force ?

Review activities: Army - MI
Navy - AS
Air Force - 11, 99
DLA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

FED. SUP CLASS
5935

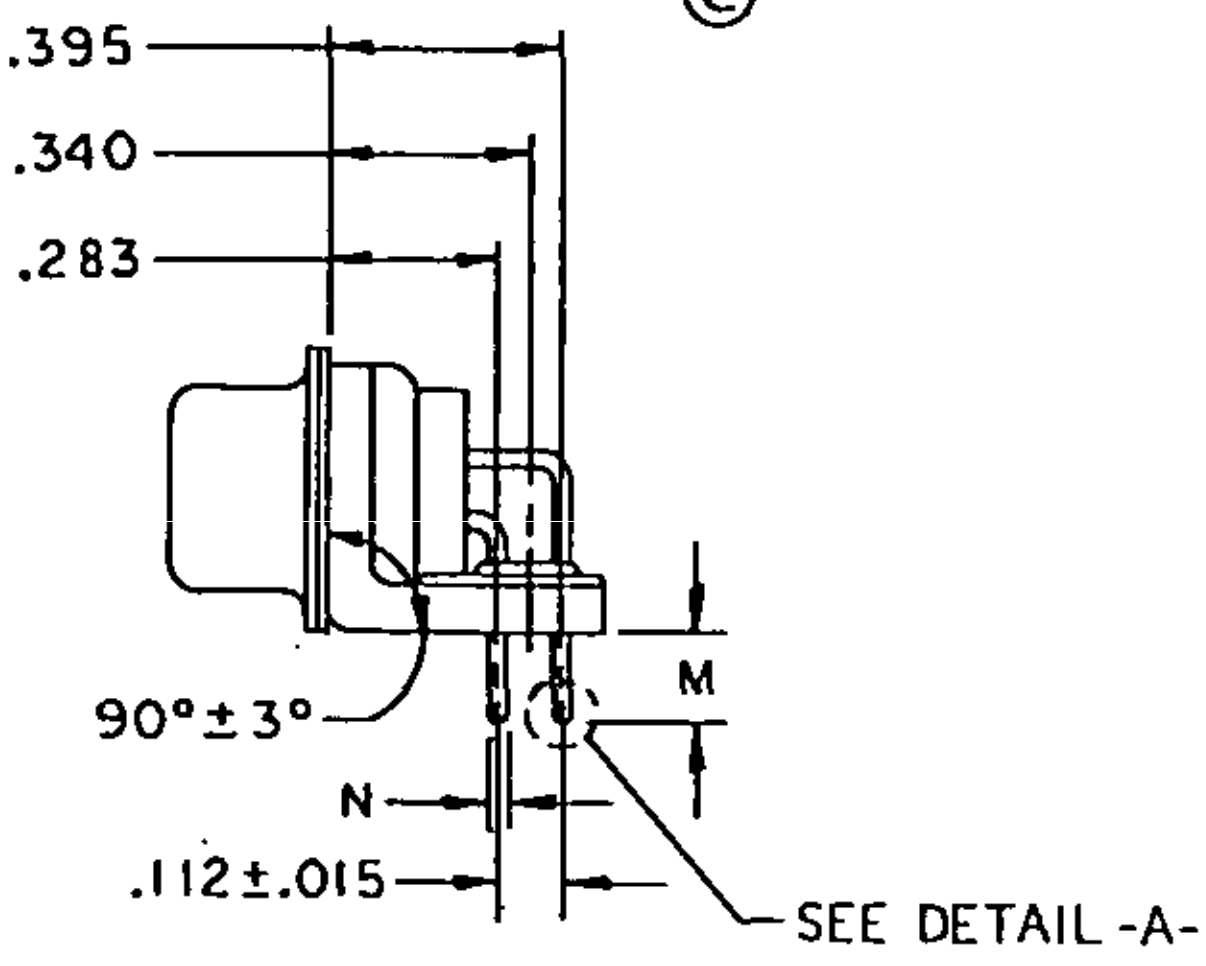

SHELL SIZE 1, 2, 3 AND 4

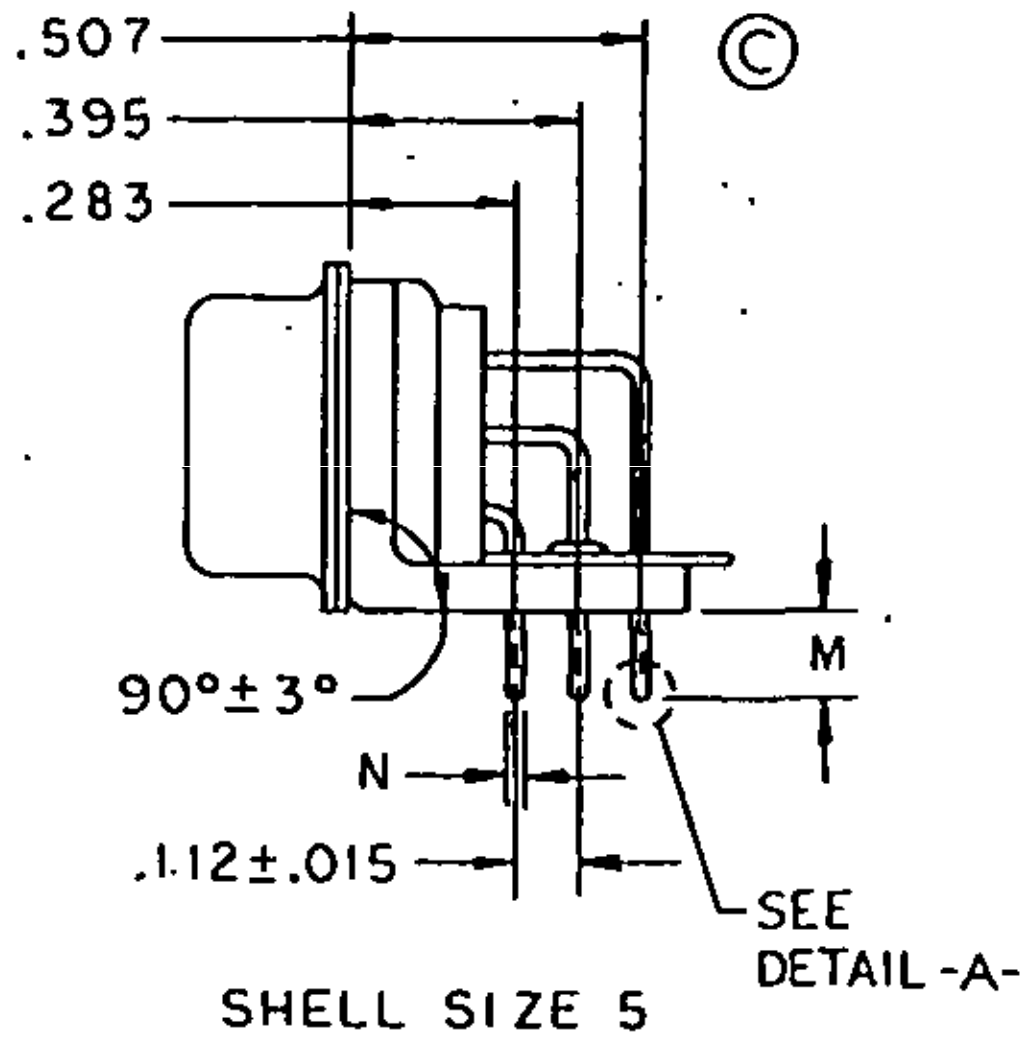

SHELL SIZE 5

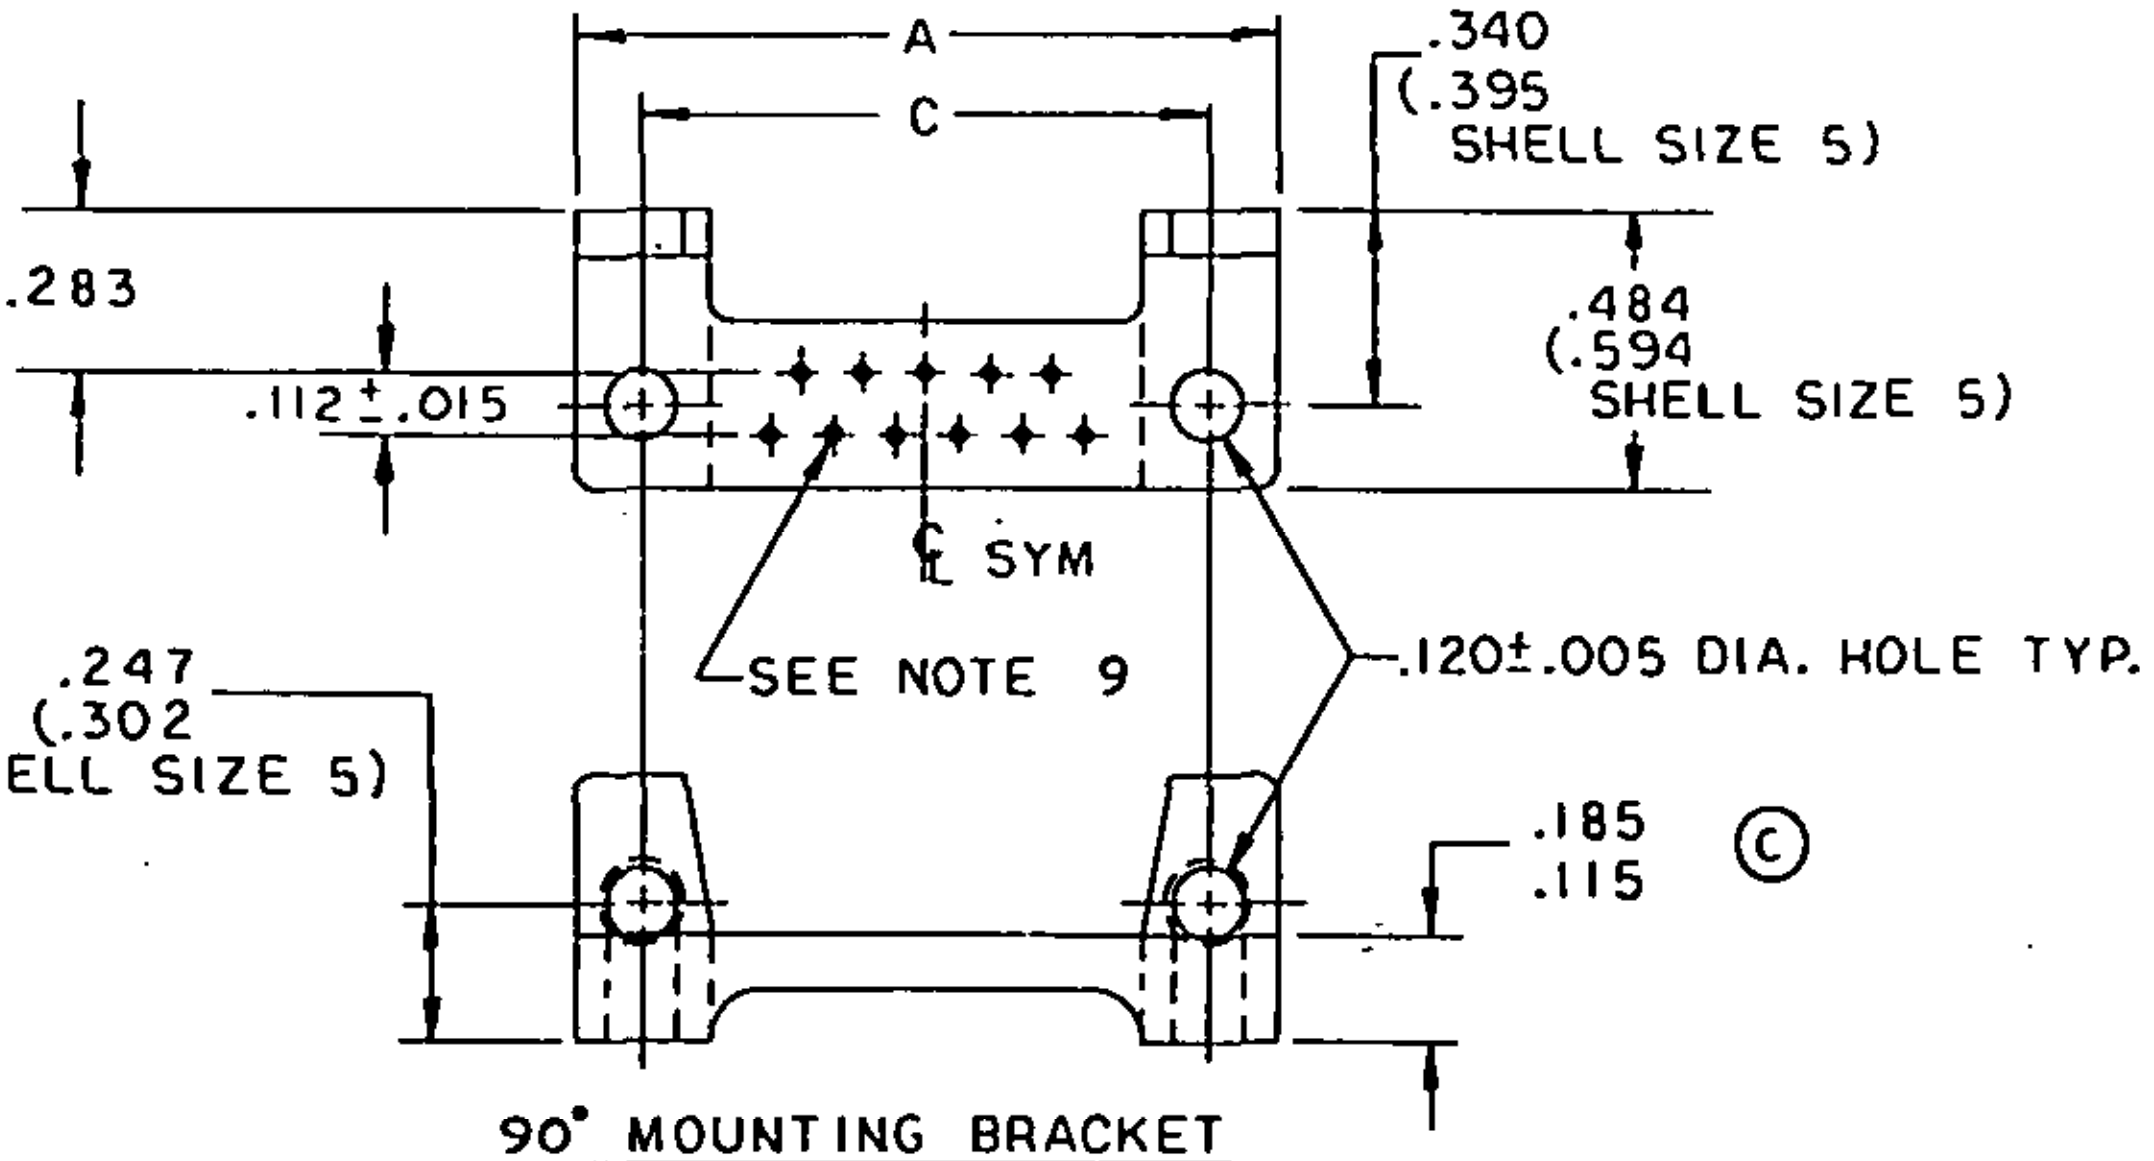

90° MOUNTING BRACKET

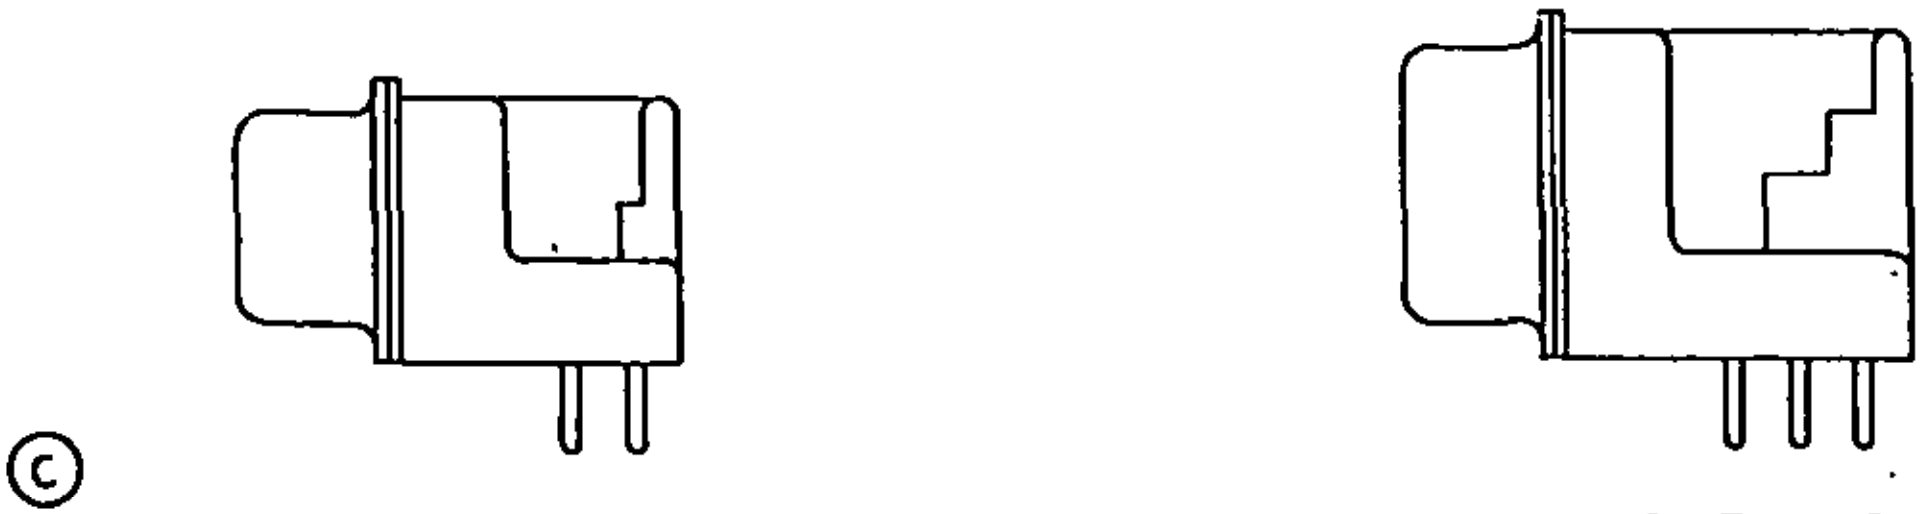

SHELL SIZE 1, 2, 3 AND 4

SHELL SIZE 5

ALTERNATE CONFIGURATION OF REAR INSERT & MOUNTING BRACKET

CONFIGURATION 3 - RIGHT ANGLE TAILS

APPROVED 13 June 1973 REVISED Ⓒ For changes see pages 1 thru 5

P.A NAVY-EC Other Cust AF-85 ARMY-CR	International Interest	TITLE CONNECTORS, ELECTRIC, RECTANGULAR MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, PLUG, PIN CONTACTS, PRINTED WIRING BOARD TERMINATION TYPES	MILITARY STANDARD MS 14059
Procurement Specification MIL-C-24308		SUPERSEDES:	PAGE 2 OF 5

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities:
Army - MI
Navy - AS
Air Force - 11,99
DLA-ES

User activities:
Army - AT
Navy - MC, CG, SH
Air Force -

TABLE I. Dimensions and configurations.

MS No. 14059	SHELL SIZE	A	B	C	D	E	F	G	H	J	K	L
-1, -7, -13, -19, -25, -31, -37, -43, -49, -55	1	1.228 (31.19) 1.198 (30.43)	.671 (17.04) .661 (16.79)	.989 (25.12) .979 (24.87)	.334 (8.48) .324 (8.23)	.509 (12.93) .479 (12.17)	.432 (10.97) .412 (10.46)	.238 (6.05) .229 (5.82)	.769 (19.53) .749 (19.02)	.432 (10.97) .412 (10.46)	.060 (1.52) .035 (.89)	.040 (1.02) .020 (.51)
-2, -8, -14, -20, -26, -32, -38, -44, -50, -56	2	1.556 (39.52) 1.526 (38.76)	.999 (25.37) .989 (25.12)	1.317 (33.45) 1.307 (33.20)	.334 (8.48) .324 (8.23)	.509 (12.93) .479 (12.17)	.432 (10.97) .412 (10.46)	.238 (6.05) .229 (5.82)	1.093 (27.76) 1.073 (27.25)	.432 (10.97) .412 (10.46)	.060 (1.52) .035 (.89)	.040 (1.02) .020 (.51)
-3, -9, -15, -21, -27, -33, -39, -45, -51, -57	3	2.103 (53.42) 2.073 (52.65)	1.539 (39.09) 1.529 (38.84)	1.857 (47.17) 1.847 (46.91)	.334 (8.48) .324 (8.23)	.509 (12.93) .479 (12.17)	.436 (11.07) .416 (10.57)	.236 (5.99) .224 (5.69)	1.635 (41.53) 1.615 (41.02)	.432 (10.97) .412 (10.46)	.070 (1.78) .050 (1.27)	.049 (1.24) .029 (.74)
-4, -10, -16, -22, -28, -34, -40, -46, -52, -58	4	2.744 (69.70) 2.714 (68.94)	2.187 (55.55) 2.177 (55.30)	2.505 (63.63) 2.495 (63.37)	.334 (8.48) .324 (8.23)	.509 (12.93) .479 (12.17)	.436 (11.07) .416 (10.57)	.236 (5.99) .224 (5.69)	2.282 (57.96) 2.262 (57.45)	.432 (10.97) .412 (10.46)	.070 (1.78) .050 (1.27)	.049 (1.24) .029 (.74)
-5, -11, -17, -23, -29, -35, -41, -47, -53, -59	5	2.650 (67.31) 2.620 (66.55)	2.084 (52.93) 2.074 (52.68)	2.411 (61.24) 2.401 (60.99)	.446 (11.33) .436 (11.07)	.620 (15.75) .590 (14.99)	.436 (11.07) .416 (10.57)	.236 (5.99) .224 (5.69)	2.188 (55.58) 2.168 (55.07)	.544 (13.82) .524 (13.31)	.070 (1.78) .050 (1.27)	.049 (1.24) .029 (.74)

FED. SUP CLASS
5935

APPROVED 13 June 1973 REVISED Ⓒ For changes see pages 1 thru 5

P.A NAVY-EC

Other Cust AF-85
ARMY-CR

International interest

TITLE CONNECTORS, ELECTRIC, RECTANGULAR MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, PLUG, PIN CONTACTS, PRINTED WIRING BOARD TERMINATION TYPES

MILITARY STANDARD

MS 14059

Procurement Specification
MIL-C-24308

SUPERSEDES:

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities:
Army - MI
Navy - AS
Air Force - 11, 99
DLA-ES

User activities:
Army - AT
Navy - MC, CG, SH
Air Force -

FED. SUP CLASS
5935

Ⓒ TABLE II. Application data and dimensions.

MS No. 14059	Applicable configurations	Applicable board thickness	Nominal pin diameter	M	N
-1 thru -5	1 and 2	.094 (2.39 mm)	.030 (.76 mm)	.185 (4.70 mm) .130 (3.30 mm)	.033 (.84 mm) .027 (.69 mm)
-7 thru -11	1 and 2	.125 (3.18 mm)	.030 (.76 mm)	.210 (5.53 mm) .155 (3.94 mm)	.033 (.84 mm) .027 (.69 mm)
-13 thru -17	1 and 2	.094 (2.39 mm)	.040 (1.02 mm)	.185 (4.70 mm) .130 (3.30 mm)	.043 (1.09 mm) .037 (.94 mm)
-19 thru -23	1 and 2	.125 (3.18 mm)	.040 (1.02 mm)	.210 (5.33 mm) .155 (3.94 mm)	.043 (1.09 mm) .037 (.94 mm)
-25 thru -29	1 and 3	.062 (1.57 mm)	.030 (.76 mm)	.154 (3.91 mm) .099 (2.51 mm)	.033 (.84 mm) .027 (.69 mm)
-31 thru -35	1 and 3	.094 (2.39 mm)	.030 (.76 mm)	.185 (4.70 mm) .130 (3.30 mm)	.033 (.84 mm) .027 (.69 mm)
-37 thru -41	1 and 3	.062 (1.57 mm)	.040 (1.02 mm)	.154 (3.91 mm) .099 (2.51 mm)	.043 (1.09 mm) .037 (.94 mm)
-43 thru -47	1 and 3	.094 (2.39 mm)	.040 (1.02 mm)	.185 (4.70 mm) .130 (3.30 mm)	.043 (1.09 mm) .037 (.94 mm)
-49 thru -53	1 and 3	.125 (3.18 mm)	.030 (.76 mm)	.210 (5.33 mm) .155 (3.94 mm)	.033 (.84 mm) .027 (.69 mm)
-55 thru -59	1 and 3	.125 (3.18 mm)	.040 (1.02 mm)	.210 (5.33 mm) .155 (3.94 mm)	.043 (1.09 mm) .037 (.94 mm)

APPROVED 13 June 1973 REVISED Ⓒ For changes see pages 1 thru 5

P.A NAVY-EC

Other Cust AF-85
ARMY-CR

International interest

TITLE CONNECTORS, ELECTRIC, RECTANGULAR, MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, PLUG, PIN CONTACTS, PRINTED WIRING BOARD TERMINATION TYPES

MILITARY STANDARD

MS 14059

Procurement Specification
MIL-C-24308

SUPERSEDES:

FED. SUP CLASS
5935

Ⓒ

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.065	1.65	.115	2.92	.221	5.61	.395	10.03
.010	.25	.070	1.78	.120	3.05	.231	5.87	.484	12.29
.015	.38	.092	2.34	.125	3.18	.247	6.27	.507	12.88
.030	.76	.102	2.59	.150	3.81	.283	7.19	.594	15.09
.040	1.02	.106	2.69	.185	4.70	.302	7.67		
.062	1.57	.112	2.84	.220	5.59	.340	8.64		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
4. Pin diameter .041/.039 (1.04/.99 mm) for arrangements MS 18273-1, MS 18274-1, MS 18275-1, MS 18276-1 and MS 18277-1.
5. Copyright notice. All information disclosed in this military standard which is or may be copyrighted by ITT Cannon Electric is reproduced herein with the express permission of the owner.
6. Ⓒ The 90° bracket shall be one piece flame resistant glass-filled nylon, polyester or two piece metal and nylon of which the metal pieces shall be coated with a material in accordance with MIL-I-46058.
7. The 90° brackets shall be furnished as an integral part of the connector assembly.
8. Spacers are required for mounting but are not furnished.
9. Layout shown for reference only to locate C_L of hole pattern. See applicable insert pattern MS.
10. Ⓒ Requirement for contact retention shall be 3.5 lbs. for right angle printed circuit board mount connectors. Connectors may be fastened to board for test.
11. Dimensions are .150 (3.81 mm) minimum full pin diameter extension (sizes 3 thru 6) and .159 (4.04 mm) minimum full pin diameter extension (sizes 1 & 2).
12. Ⓒ Unless otherwise specified, tolerance is ±.010 inch.

THIS IS A DESIGN STANDARD, NOT TO BE USED AS A PART NUMBER.

User activities: Army - AT
Navy - MC, CG, SH
Air Force -

Review activities: Army - MI
Navy - AS
Air Force - 11, 99
DLA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 13 June 1973 REVISED Ⓒ For changes see pages 1 thru 5

P.A NAVY-EC Other Cust AF-85 ARMY-CR	International Interest	TITLE CONNECTORS, ELECTRIC, RECTANGULAR MINIATURE, POLARIZED SHELL, RACK AND PANEL, SHELL, PLUG, PIN CONTACTS, PRINTED WIRING BOARD TERMINATION TYPES	MILITARY STANDARD MS 14059
Procurement Specification MIL-C-24308		SUPERSEDES:	PAGE 5 OF 5

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.