User activities
NAVY - OS, SH

Review activities
ARMY - MI
DLA - IS
NS

FED SUP CLASS
5310

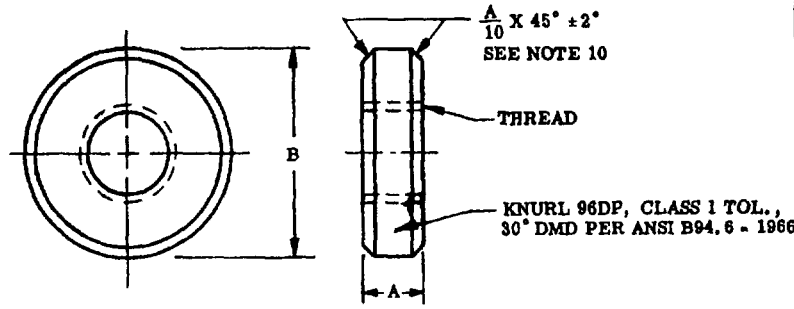



TABLE I

| DASH NO. BRASS | DASH NO. CRES | DASH NO. CARBON STEEL | DASH NO. AL ALLOY | THREAD | A | B |
|---|---|---|---|---|---|---|
| 1B* | 1C* | 1S* | 1A* | | .06 | .56 |
| 2B | 2C | 2S | 2A | | .09 | .88 |
| 3B* | 3C* | 3S* | 3A* | | .12 | .38 |
| 4B* | 4C* | 4S* | 4A* | (NO. 4) | .22 | .31 |
| 5B | 5C | 5S | 5A | .112 40UNC-2B | .25 | .38 |
| 6B | 6C | 6S | 6A | | .50 | .38 |
| 7B* | 7C* | 7S* | 7A* | | .56 | .38 |
| 8B* | 8C* | 8S* | 8A* | | .12 | .50 |
| 9B* | 9C* | 9S* | 9A* | | .16 | .56 |
| 10B | 10C | 10S | 10A | | .19 | .50 |
| 11B* | 11C* | 11S* | 11A* | (NO. 6) | .22 | .33 |
| 12B | 12C | 12S | 12A | .138 32UNC-2B | .25 | .38 |
| 13B* | 13C* | 13S* | 13A | | .28 | .41 |
| 14B* | 14C* | 14S* | 14A* | | .30 | .62 |
| 15B | 15C | 15S | 15A | | .34 | .50 |
| 16B* | 16C* | 16S* | 16A* | | .35 | .62 |
| 17B | 17C | 17S | 17A | | .94 | .88 |
| 18B* | 18C* | 18S* | 18A* | | .16 | .50 |
| 19B | 19C | 19S | 19A | | .19 | .50 |
| 20B* | 20C* | 20S* | 20A* | | .22 | .44 |
| 21B | 21C | 21S | 21A | | .25 | .75 |
| 22B | 22C | 22S | 22A | | .28 | .50 |
| 23B* | 23C* | 23S* | 23A* | (NO. 8) .164 | .31 | .44 |
| 24B* | 24C* | 24S* | 24A* | 32UNC-2B | .34 | .41 |
| 25B | 25C | 25S | 25A | | .38 | .68 |
| 26B* | 26C* | 26S* | 26A* | | .41 | .50 |
| 27B | 27C | 27S | 27A | | .47 | .38 |
| 28B | 28C | 28S | 26A | | .50 | .50 |
| 29B* | 29C* | 29S* | 29A* | | 56 | .50 |
| 30B | 30C | 30S | 30A | | .62 | .75 |
| 31B* | 31C* | 31S* | 31A* | | .18 | .88 |
| 32B* | 32C* | 32S* | 32A* | | .19 | .75 |
| 33B | 33C | 33S | 33A | | .25 | 1.00 |
| 34B* | 34C* | 34S* | 34A* | | .28 | .75 |
| 35B | 35C | 35S | 35A | (NO. 10) .190 | .31 | .50 |
| 36B | 36C | 36S | 36A | 32UNF-2B | .33 | .52 |
| 37B* | 37C* | 37S* | 37A* | | .38 | .50 |
| 38B* | 38C* | 38S* | 38A* | | .41 | .50 |
| 39B* | 39C* | 39S* | 39A* | | .44 | .62 |
| 40B | 40C | 40S | 40A | | .50 | .50 |
| 41B | 41C | 41S | 41A | | .56 | .76 |

| DASH NO. BRASS | DASH NO. CRES | DASH NO. CARBON STEEL | DASH NO. AL ALLOY | THREAD | A | B |
|---|---|---|---|---|---|---|
| 42B* | 42C* | 42S* | 42A* | | .12 | .75 |
| 43B | 43C | 43S | 43A | | .23 | .50 |
| 44B | 44C | 44S | 44A | | .25 | .75 |
| 45B* | 45C* | 45S* | 45A* | (NO. 10) | .31 | .75 |
| 46B* | 46C* | 46S* | 46A* | .190 24UNC-2B | .33 | .50 |
| 47B* | 47C* | 47S* | 47A* | | .38 | .75 |
| 48B | 48C | 48S | 48A | | .44 | .75 |
| 49B | 49C | 49S | 49A | | .69 | 1.00 |
| 50B | 50C | 50S | 50A | | .12 | .88 |
| 51B* | 51C* | 51S* | 51A* | | .25 | 1.00 |
| 52B | 52C | 52S | 52A | | .38 | 1.00 |
| 53B* | 53C* | 53S* | 53A* | (1/4) | .41 | .62 |
| 54B | 54C | 54S | 54A | .25 20UNC-2B | .50 | .50 |
| 55B | 55C | 55S | 55A | | .55 | 1.25 |
| 56B* | 56C* | 56S* | 56A* | | .56 | .62 |
| 57B* | 57C* | 57S* | 57A* | | .12 | .56 |
| 58B | 58C | 58S | 58A | | .19 | /62 |
| 59B | 59C | 59S | 59A | | .25 | .75 |
| 60B* | 60C* | 60S* | 60A* | (1/4) | .38 | .69 |
| 61B | 61C | 61S | 61A | .25 28UNF-2B | .50 | .75 |
| 62B | 62C | 62S | 62A | | .56 | 1.50 |
| 63B | 63C | 63S | 63A | | .65 | .88 |
| 64B* | 64C* | 64S* | 64A* | | .69 | .56 |
| 65B* | 65C* | 65S* | 65A* | | .75 | 1.50 |
| 66B | 66C | 66S | 66A | (5/16) | .25 | .88 |
| 67B | 67C | 67S | 67A | .3125 | .38 | 1.25 |
| 68B* | 68C* | 68S* | 68A* | 18UNC-2B | .38 | .62 |
| 69B | 69C | 69S | 69A | | .56 | .88 |
| 70B* | 70C* | 70S* | 70A* | | .12 | .88 |
| 71B | 71C | 71S | 71A | | .25 | .88 |
| 72B | 72C | 72S | 72A | (5/16) | .31 | 1.00 |
| 73B* | 73C* | 73S* | 73A* | .3125 | .38 | .44 |
| 74B* | 74C* | 74S* | 74A* | 24UNF-2B | .44 | .56 |
| 75B | 75C | 75S | 75A | | 50 | .75 |
| 76B* | 76C* | 76S* | 76A* | | .88 | .75 |
| 77B | 77C | 77S | 77A | | .94 | 1.25 |

* INACTIVE FOR DESIGN AFTER 27 FEB 1976

(D) REVISED AND REDRAWN

APPROVED 19 FEB 1962 REVISED (A) 12 OCT 1966 (B) 3 OCT 1969 (C) 27 FEB 1976 (D) 7 DEC 1979

| P.A. AR | TITLE | MILITARY STANDARD |
|---|---|---|
| Other Cust 99 | NUT, PLAIN, KNURLED | MS16994 |
| PROCUREMENT SPECIFICATION FF-N-836 | SUPERSEDES | SHEET 1 OF 3 |

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5310 - 1038

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:02Z
Check the source to verify that this is the current version before use.

User activities:
NAVY - OS, SH

Review activities:
ARMY - MI
DLA - IS
NS

FED SUP CLASS
5310

TABLE I - CONTINUED

| DASH NO. BRASS | DASH NO. CRES | DASH NO. CARBON STEEL | DASH NO. AL ALLOY | THREAD | A | B |
|---|---|---|---|---|---|---|
| 78B* | 78C* | 78S* | 78A* | | .09 | .84 |
| 79B | 79C | 79S | 79A | | .12 | .50 |
| 80B* | 80C* | 80S* | 80A* | | .12 | .62 |
| 81B | 81C | 81S | 81A | (3/8) | .16 | .94 |
| 82B* | 82C* | 82S* | 82A* | .375 32UNEF-2B | .19 | .52 |
| 83B | 83C | 83S | 83A | | .25 | .69 |
| 84B | 84C | 84S | 84A | | .31 | 1.00 |
| 85B* | 85C* | 85S* | 85A* | | .38 | .69 |
| 86B | 86C | 86S | 86A | | .75 | .75 |
| 87B* | 87C* | 87S* | 87A* | | .88 | .62 |
| 88B* | 88C* | 88S* | 88A* | | .09 | .69 |
| 89B | 89C | 89S | 89A | | .12 | .69 |
| 90B* | 90C* | 90S* | 90A* | (3/8) | .19 | .62 |
| 91B* | 91C* | 91S* | 91A* | .375 | .22 | .55 |
| 92B | 92C | 92S | 92A | 24UNF-2B | .25 | 1.25 |
| 93B* | 93C* | 93S* | 93A* | | .38 | .88 |
| 94B | 94C | 94S | 94A | | .50 | .75 |
| 95B* | 95C* | 95S* | 95A* | | .77 | .77 |
| (D) -- | 122C | -- | -- | (3/8) .375 16UNC-2B | .50 | 1.25 |
| 96B* | 96C* | 96S* | 96A* | | .09 | 1.19 |
| 97B* | 97C* | 97S* | 97A* | | .12 | 1.00 |
| 98B* | 98C* | 98S* | 98A* | | .16 | 1.50 |
| 99B* | 99C* | 99S* | 99A* | (7/16) | .31 | .88 |
| 100B* | 100C* | 100S* | 100A* | *.4375 20UNF-2B | .44 | .88 |
| 101B* | 101C* | 101S* | 101A* | | .47 | 1.00 |
| 102B* | 102C* | 102S* | 102A* | | .75 | 1.50 |
| 103B* | 103C* | 103S* | 103A* | | .88 | 1.00 |

| DASH NO. BRASS | DASH NO. CRES | DASH NO. CARBON STEEL | DASH NO. AL ALLOY | THREAD | A | B |
|---|---|---|---|---|---|---|
| 104B* | 104C* | 104S* | 104A* | | .09 | 1.00 |
| 105B | 105C | 105S | 105A | (1/2) | .12 | 1.12 |
| 106B* | 106C* | 106S* | 106A* | .50 | .19 | 1.75 |
| 107B | 107C | 107S | 107A | 20UNF-2B | .25 | .75 |
| 108B | 108C | 108S | 108A | | .38 | 1.00 |
| 109B* | 109C* | 109S* | 109A* | | .44 | 1.62 |
| 110B | 110C | 110S | 110A | | .47 | 1.50 |
| 111B* | 111C* | 111S* | 111A* | | .56 | .97 |
| 112B | 112C | 112S | 112A | | .75 | 1.50 |
| 113B | 113C | 113S | 113A | | .88 | 2.50 |
| 114B* | 114C* | 114S* | 114A* | | 1.25 | 1.25 |
| 115B* | 115C* | 115S* | 115A* | | .08 | 1.75 |
| 116B | 116C | 116S | 116A | | .12 | 1.72 |
| 117B* | 117C* | 117S* | 117A* | (3/4) | .25 | 1.91 |
| 118B* | 118C* | 118S* | 118A* | .75 | .31 | 1.06 |
| 119B | 119C | 119S | 119A | 20UNEF-2B | .39 | 1.25 |
| 120B | 120C | 120S | 120A | | .44 | 1.88 |
| 121B | 121C | 121S | 121A | | .75 | 1.50 |

* INACTIVE FOR DESIGN AFTER 27 FEB 1976

NOTES

1 MATERIALS BRASS, HALF HARD IN ACCORDANCE WITH QQ-B-626
STEEL, CORROSION RESISTING, FED-STD-66, 300 SERIES
(D) STEEL CARBON
ALUMINUM ALLOY, TEMPER T4, IN ACCORDANCE WITH QQ-A-225/6

2 FINISH BRASS BLACK CHEMICAL FINISH IN ACCORDANCE WITH MIL-F-495
STEEL CORROSION RESISTING, PASSIVATION TREATMENT IN ACCORDANCE WITH QQ-P-35
STEEL CADMIUM PLATE, TYPE II, CLASS 3, IN ACCORDANCE WITH QQ-P-416
ALUMINUM ALLOY ANODIC COATING, IN ACCORDANCE WITH MIL-A-8625

3 MAGNETIC PERMEABILITY: CORROSION RESISTING STEEL FASTENERS SHALL HAVE A MAGNETIC PERMEABILITY OF 2 0 MAXIMUM (AIR = 1 0) FOR A FIELD STRENGTH OF H = 200 OERSTEDS USING MAGNETIC INDICATOR PER MIL-I-17214

4 THREADS THE THREADS SHALL BE IN ACCORDANCE WITH THE SCREW-THREAD STANDARDS FOR FEDERAL SERVICES, FED-STD-H28

5 DIMENSIONS ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

6 TOLERANCE ± 01

7 PART NUMBER· THE PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER.
EXAMPLE· MS16994-1B

8 FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN

9 REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF ISSUE ADOPTED.

10. WHERE A/10 IS LESS THAN 025, CHAMFER BY BREAKING SHARP EDGES ONLY

APPROVED 19 FEB 1962 REVISED (D) FOR CHANGES SEE SHEET 1 AND 2

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

| P A | AR | TITLE | MILITARY STANDARD |
|---|---|---|---|
| Other Cust | 99 | NUT, PLAIN, KNURLED | MS16994 |
| PROCUREMENT SPECIFICATION SUPERSEDES FF-N-836 | | | SHEET 2 OF 3 |

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:02Z
Check the source to verify that this is the current version before use.

User activities:
NAVY - OS, SH

Review activities:
ARMY - MI
DLA - IS
NS

## TABLE II - INTERCHANGEABILITY

THE FOLLOWING NUTS ARE CANCELLED AFTER 12 OCTOBER 1966. USE ONLY THE NEW NUTS FOR NEW DESIGN. REPLACEMENT SHALL BE IN ACCORDANCE WITH THIS TABLE. CANCELLED NUTS MAY BE USED UNTIL EXISTING STOCK IS DEPLETED.

| PART NUMBER | | PART NUMBER | | PART NUMBER | | PART NUMBER | |
|---|---|---|---|---|---|---|---|
| CANCELLED | NEW | CANCELLED | NEW | CANCELLED | NEW | CANCELLED | NEW |
| MS16994-1 | MS16994-1B | MS16994-31 | MS16994-31B | MS16994-61 | MS16994-61B | MS16994-91 | MS16994-91B |
| -2 | -2B | -32 | -32B | -62 | -62B | -92 | -92B |
| -3 | -3B | -33 | -33B | -63 | -63B | -93 | -93B |
| -4 | -4B | -34 | -34B | -64 | -64B | -94 | -94B |
| -5 | -5B | -35 | -35B | -65 | -65B | -95 | -95B |
| -6 | -6B | -36 | -36B | -66 | -66B | -96 | -96B |
| -7 | -7B | -37 | -37B | -67 | -67B | -97 | -97B |
| -8 | -8B | -38 | -38B | -68 | -68B | -98 | -98B |
| -9 | -9B | -39 | -39B | -69 | -69B | -99 | -99B |
| -10 | -10B | -40 | -40B | -70 | -70B | -100 | -100B |
| -11 | -11B | -41 | -41B | -71 | -71B | -101 | -101B |
| -12 | -12B | -42 | -42B | -72 | -72B | -102 | -102B |
| -13 | -13B | -43 | -43B | -73 | -73B | -103 | -103B |
| -14 | -14B | -44 | -44B | -74 | -74B | -104 | -104B |
| -15 | -15B | -45 | -45B | -75 | -75B | -105 | -105B |
| -16 | -16B | -46 | -46B | -76 | -76B | -106 | -106B |
| -17 | -17B | -47 | -47B | -77 | -77B | -107 | -107B |
| -18 | -18B | -48 | -48B | -78 | -78B | -108 | -108B |
| -19 | -19B | -49 | -49B | -79 | -79B | -109 | -109B |
| -20 | -20B | -50 | -50B | -80 | -80B | -110 | -110B |
| -21 | -21B | -51 | -51B | -81 | -81B | -111 | -111B |
| -22 | -22B | -52 | -52B | -82 | -82B | -112 | -112B |
| -23 | -23B | -53 | -53B | -83 | -83B | -113 | -113B |
| -24 | -24B | -54 | -54B | -84 | -84B | -114 | -114B |
| -25 | -25B | -55 | -55B | -85 | -85B | -115 | -115B |
| -26 | -26B | -56 | -56B | -86 | -86B | -116 | -116B |
| -27 | -27B | -57 | -57B | -87 | -87B | -117 | -117B |
| -28 | -28B | -58 | -58B | -88 | -88B | -118 | -118B |
| -29 | -29B | -59 | -59B | -89 | -89B | -119 | -119B |
| -30 | -30B | -60 | -60B | -90 | -90B | -120 | -120B |

(R) FOR CHANGES SEE SHEET 1 AND 2

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

| | | |
|---|---|---|
| P A AR<br>Other Cust<br>99 | TITLE<br>NUT, PLAIN, KNURLED | MILITARY STANDARD<br>MS16994 |
| PROCUREMENT SPECIFICATION<br>FF-N-836 | SUPERSEDES | SHEET 3 OF 3 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:02Z
Check the source to verify that this is the current version before use.