
This standard has been approved by the BUREAU OF NAVAL WEAPONS Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

NOTE:
THE GOVERNMENT HAS A ROYALTY FREE LICENSE UNDER THESE PATENTS FOR THE BENEFIT OF MANUFACTURERS OF THE ITEM EITHER FOR THE GOVERNMENT OR FOR USE IN EQUIPMENT TO BE DELIVERED TO THE GOVERNMENT. (U. S. PATENT NO. 2865091)

DD FORM 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PROCUREMENT SPECIFICATION	P.A. Other Cost
SUPERSEDES:	TITLE: ELBOW, 45° SWIVEL FLANGE, HOSE FITTING AMS 5639 CRES STEEL
SHEET 1 OF 2	MILITARY STANDARD MS18074 (WP)

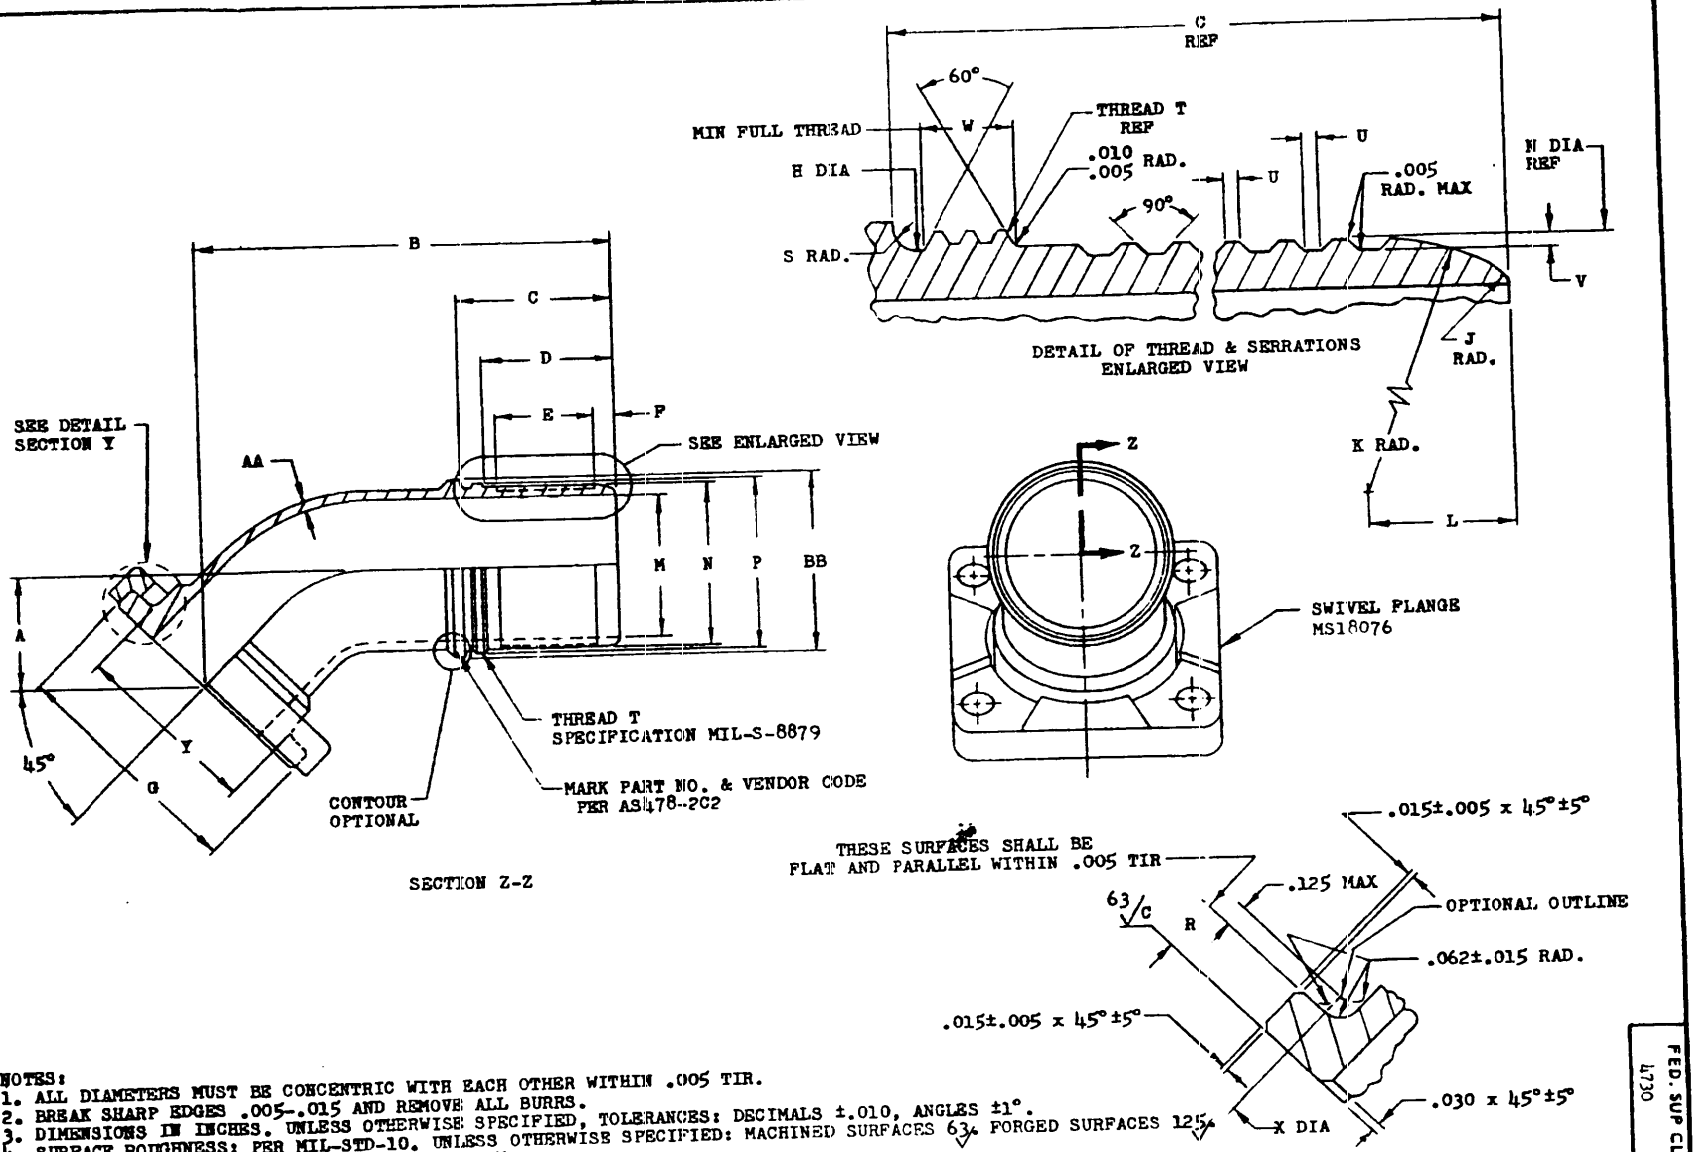

NOTES:
1. ALL DIAMETERS MUST BE CONCENTRIC WITH EACH OTHER WITHIN .005 TIR.
2. BREAK SHARP EDGES .005-.015 AND REMOVE ALL BURRS.
3. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±1°.
4. SURFACE ROUGHNESS: PER MIL-STD-10. UNLESS OTHERWISE SPECIFIED: MACHINED SURFACES 63 FORGED SURFACES 125
5. MATERIAL: CORROSION RESISTANT STEEL AMS 5639.
6. PASSIVATION: A.) DEGREASE.
   B.) IMMERSE FOR NOT LESS THAN 20 MINUTES IN A SOLUTION OF 1 VOLUME OF NITRIC ACID (SP GR 1.42) AND 9 VOLUMES OF WATER AT ROOM TEMPERATURE.

FED. SUP CLASS 4730

APPROVED 26 April 1965 REVISED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:14Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

PART NO.	A MAX	B MAX	G ±.005	D ±.005	E	F	G	H	J	K	L	M	N	P	R	S	THREAD † MIL-S-8879
MS18074-08	.486	2.098	.875	.750	.578	.094	.875 .870	.437 .432	.010 .005	.210	.094	.354 .348	.435	.4987 .4906	.156 .151	.031	.5000-20 UNJF-3A
MS18074-10	.557	2.471	1.062	.937	.703	.125	1.000 .995	.625 .613	.020 .010	.625	.203	.441 .435	.535	.6863 .6791	.156 .151	.031	.6875-24 UNJF-3A
MS18074-12	.740	2.913	1.062	.937	.703	.125	1.250 1.245	.686 .675	.020 .010	.625	.203	.568 .562	.670	.7487 .7406	.156 .151	.031	.7500-20 UNJF-3A
MS18074-16	.813	3.089	1.062	.937	.703	.125	1.500 1.495	.984 .974	.020 .010	.625	.203	.821 .815	.923	1.0611 1.0524	.156 .151	.031	1.0625-18 UNJF-3A
MS18074-20	.813	3.370	1.344	1.187	.953	.125	1.844 1.839	1.234 1.224	.020 .010	1.155	.250	1.018 1.012	1.185	1.3110 1.3023	.156 .151	.031	1.3125-18 UNJF-3A
MS18074-24	.959	3.723	1.344	1.187	.953	.125	2.125 2.120	1.428 1.418	.020 .010	1.155	.250	1.275 1.269	1.426	1.4905 1.4898	.188 .183	.031	1.5000-18 UNJF-3A

PART NO.	U ±.0015	V ±.0015	W ±.005	X MAX	Y MAX	AA MIN	BB MAX	WEIGHT MAX LBS
MS18074-08	.015	.015	.078	.625	.625	.042	.515	.175
MS18074-10	.015	.015	.081	.750	.813	.042	.701	.251
MS18074-12	.015	.015	.081	.938	.938	.042	.765	.330
MS18074-16	.015	.015	.081	1.188	1.188	.042	1.076	.402
MS18074-20	.015	.015	.112	1.500	1.500	.042	1.312	.698
MS18074-24	.015	.015	.112	1.750	1.625	.042	1.498	.920

APPROVED 26 April 1965 REVISED

P.A.
Other Cost

PROCUREMENT SPECIFICATION

TITLE
ELBOW, 45° SWIVEL FLANGE, HOSE FITTING
AMS 5639 CRES STEEL

MILITARY STANDARD
MS18074 (WP)
SHEET 2 OF 2

This standard has been approved by the BUREAU OF NAVAL WEAPONS
Department of the NAVY and is mandatory for use by
all activities. All other military activities are required
to apply this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 20261O-23T14:14Z
Check the source to verify that this is the current version before use.