INCH-POUND
MS18229C(SH)
31 January 2017
SUPERSEDING
MS18229B(SH)
30 October 1986

MILITARY SPECIFICATION SHEET

PLUG FOR O-RING GASKET


This specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet.

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:17Z
Check the source to verify that this is the current version before use.

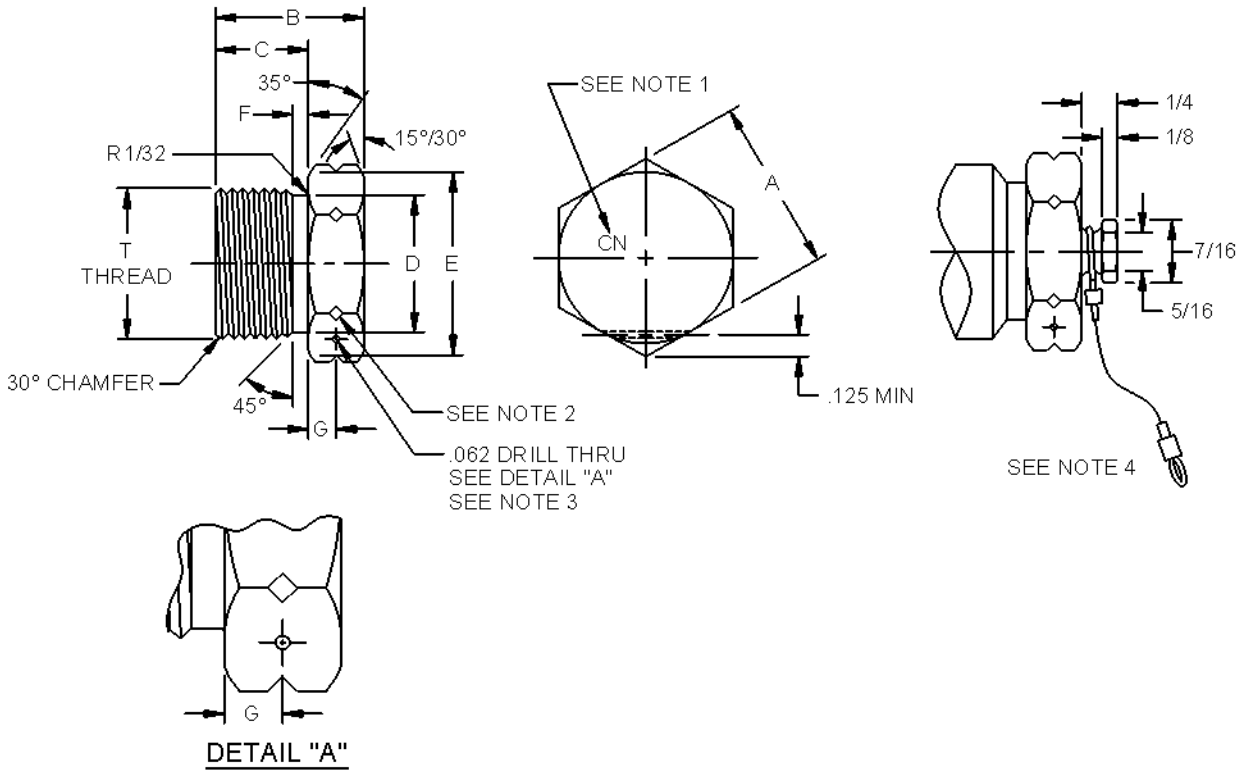

NOTES:

1. Each plug shall be marked on the hex head in accordance with MIL-STD-792 with one of the following material designators:

Ferrous metal	Designator
Carbon steel	CS
Stainless steel	SS
Corrosion resistant steel	CR
Non-ferrous metal	Designator
Copper nickel	CN
Nickel copper	NC
Tin bronze	TB
Titanium	TI

   Material identification shall be specified by adding the appropriate designator to the dash number (see table I). The designator is only for identification purposes and does not replace pertinent material data required by the applicable material specification.
2. When non-ferrous designators are specified in accordance with Note 1 above, the notched hex corners (60-degree included angle, 0.030 to 0.045 deep) shall be provided.
3. Lockwire holes shall be specified by adding “L” after the material designator.
4. Lanyard retainer posts shall be specified by adding “Y” after the material designator or lockwire hole designator (if applicable).

FIGURE 1. Plug for O-ring gasket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:17Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions and sizes for plug for O-ring gasket.

Dash no.	Tube OD	"T" straight thread (UN-2A)	A Hexagon across flats	B ±1/64	C ±0.005	D ±0.002 0.003	E ±1/64	F ±0.005	G ±0.015	O-ring AS 568
02	1/8	5/16 – 24	7/16	17/32	0.297	0.250	1/2	0.074	0.117	-902
03	3/16	3/8 – 24	1/2	17/32	0.297	0.313	9/16	0.074	0.117	-903
04	1/4	7/16 – 20	9/16	39/64	0.360	0.364	5/8	0.093	0.125	-904
05	5/16	1/2 – 20	5/8	39/64	0.360	0.427	11/16	0.093	0.125	-905
06	3/8	9/16 – 18	11/16	11/16	0.391	0.482	3/4	0.097	0.148	-906
08	1/2	3/4 – 16	7/8	3/4	0.438	0.660	15/16	0.100	0.156	-908
10	5/8	7/8 – 14	1	3/16	0.500	0.773	1 1/16	0.100	0.156	-910
12	3/4	1 1/16 – 12	1 1/4	1	0.594	0.945	1 5/16	0.130	0.203	-912
14	7/8	1 3/16 – 12	1 3/8	1	0.594	1.070	1 7/16	0.130	0.203	-914
16	1	1 5/16 – 12	1 1/2	1	0.594	1.195	1 9/16	0.130	0.203	-916
20	1 1/4	1 5/8 – 12	1 7/8	1	0.594	1.507	1 15/16	0.132	0.203	-920
24	1 1/2	1 7/8 – 12	2 1/8	1	0.594	1.756	2 3/16	0.132	0.203	-924
32	2	2 1/2 – 12	2 3/4	1	0.594	2.381	2 13/16	0.132	0.203	-932

NOTES:
1. Dimensions and sizes are in inches.
2. OD = Outer Diameter.

Example of part numbers:

MS18229-6CS – Plug, 3/8 Tubing, Carbon Steel

MS18229-6TIL – Plug, 3/8 Tubing, Titanium, with Lockwire Hole (Hex Notches)

MS18229-6NCY – Plug, 3/8 Tubing, Nickel Copper, with Lanyard Retainer Post (Hex Notches)

MS18229-6CRLY – Plug, 3/8 Tubing, Corrosion Resistant Steel, with Lockwire Hole, and Lanyard Retainer Post

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Navy – SH

Preparing activity:
Navy – SH
(Project 4730-2017-029)

Review activity:
DLA – CC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:17Z
Check the source to verify that this is the current version before use.