

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-R-6106

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defenses.

Form Approved
OMB No. 0704-0188

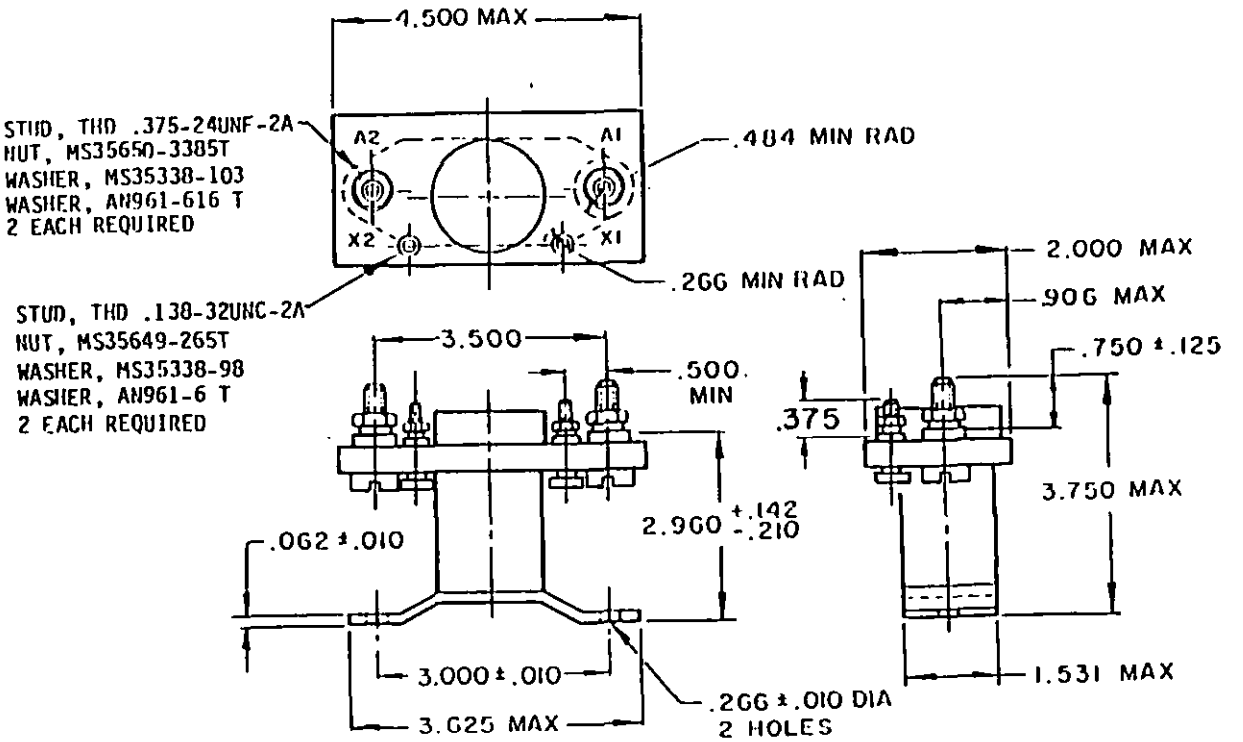

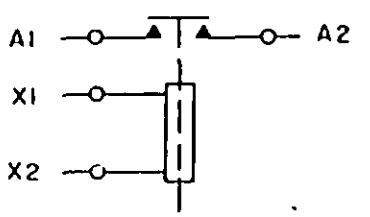

CIRCUIT (applicable to configurations A and B)

CONFIGURATION A. Outline drawing (for details see tables I and II).

ENTIRE STANDARD REVISED


PREPARING ACTIVITY: Air Force-85 CUSTODIANS: ARMY - NAVY - AS AIR FORCE - 85 DLA - Air Force- 11, 99 REVIEW: Navy - AS, EC USER: PROJECT NUMBER: 5945-0803-01	MILITARY SPECIFICATION SHEET TITLE RELAYS, ELECTROMAGNETIC, 200 AMPERES, 1PST (NO), TYPE II, NON-HERMETICALLY SEALED	SPECIFICATION SHEET NUMBER MS24171F 28 Apr 1989 SUPERSEDING MS24171E 24 Sept 82 AMSC N/A FSC 5945
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.		Page 1 of 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:49Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-R-6106

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

Form Approved
OMB No. 0704-0188

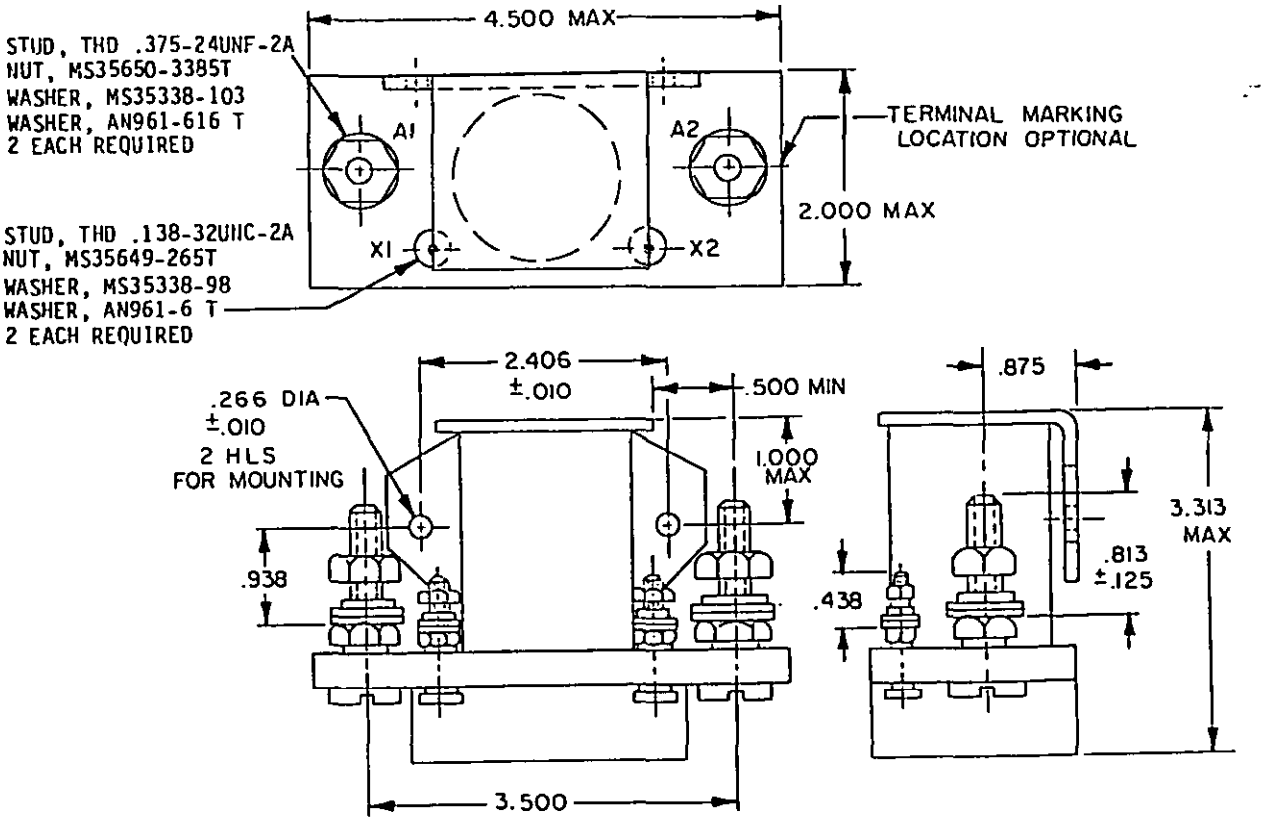

CONFIGURATION B. Outline drawing (for details see tables I and II).

Inches	mm	Inches	mm	Inches	mm
.010	0.25	.484	12.30	2.000	50.80
.062	1.57	.500	12.70	2.406	61.11
.125	3.18	.750	19.06	3.960	75.18
.138	3.51	.813	20.66	3.000	76.20
.142	3.61	.875	22.22	3.313	84.15
.210	5.33	.906	23.01	3.500	88.90
.266	6.76	.938	23.83	3.750	95.26
.375	9.52	1.000	25.40	4.500	114.30
.438	11.13	1.531	38.89		

NOTES:
1. Dimensions are in inches.
2. Terminal cover not required.
3. Additional flat washer may be used for terminal seat.
4. Part number MS24171-D1 replaces part no. MS24171-1.
5. This specification sheet takes precedence over documents referenced herein.
6. Referenced documents shall be of the issue in effect on date of invitation for bid.
7. Metric equivalents are given for general information only.
8. Unless otherwise specified, tolerances are ±.062 (1.57 mm).
9. Terminal temperature rise under continuous current conditions, 95°C. Intermediate current to be conducted at 71°C.
10. Shape of relay optional within envelope dimensions.

PREPARING ACTIVITY: Air Force-85
CUSTODIANS: ARMY - NAVY - AS
AIR FORCE - 85 DLA -
REVIEW: Air Force- 11, 99
Navy - AS, EC
USER:
PROJECT NUMBER: 5945-0803-01

MILITARY SPECIFICATION SHEET
TITLE
RELAYS, ELECTROMAGNETIC
200 AMPERES, 1PST (NO), TYPE II,
NON-HERMETICALLY SEALED

SPECIFICATION SHEET NUMBER
MS24171F
SUPERSEDING
MS24171E
AMSC N/A FSC 5945

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

DD Form 672, MAY 88 Previous editions are obsolete.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:49Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-R-6106

TABLE I. Dash numbers and characteristics.

Dash number MS24171-	Type	Coil	Terminal type	Mounting or mating socket	Max weight in pounds
D1 1/	II	dc	Stud	Bracket - bottom	1.33
D2 2/	II	dc	Stud	Bracket - side	1.33

1/ For Government logistics support MS24171-D1 shall be used in lieu of AN3370-2.
2/ For Government logistics support MS24171-D2 shall be used in lieu of AN3370-1.

TABLE II. Operating characteristics.

MS part no. MS24171	Coil data									Time (milliseconds - maximum)							
	Coil	Nominal			Max		Max pick-up voltage			Hold voltage 2/	Drop out voltage 2/	Operate 3/	Release 4/	Bounce			
		Volts 1/	Freq Hz	Resn minimum 25°C	Volts	Amperes	Normal test 2/	High temp test	Cont current test					Main		Aux	
														NO	NC	NO	NC
D1	X1, X2	28	dc	59	29	.60	18	21	22.5	7.0	1.5	25	10	50			
D2	X1, X2	28	dc	59	29	.60	18	21	22.5	7.0	1.5	25	10	50			

1/ CAUTION: Use of any coil voltage less than nominal coil voltage will compromise the operation of the relay.
2/ Over the temperature range.
3/ With nominal coil voltage.
4/ From nominal coil voltage.

PREPARING ACTIVITY: Air Force-85
CUSTODIANS: ARMY - NAVY - AS
AIR FORCE - 85 DLA -
REVIEW: Navy - AS, EC
Air Force - 11, 99
USER:
PROJECT NUMBER: 5945-0803-01
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

MILITARY SPECIFICATION SHEET
TITLE: RELAYS, ELECTROMAGNETIC, 200 AMPERES, 1PST (NO), TYPE II, NON-HERMETICALLY SEALED

SPECIFICATION SHEET NUMBER: MS24171F
SUPERSEDING: MS24171E
AMSC: N/A
FSC: 5945

DD Form 672, MAY 88

Form Approved OMB No. 0704-0188

Source approved for public release; distribution is unlimited.
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-R-6106

TABLE III. Rated contact load (amperes per pole) case grounded.

Type of load	Life operating cycles x 10^3	28 v dc				115 V ac, 1 phase				115/200 V ac, 3 phase 1/				See appropriate notes
		Main		Aux		Main		Aux		Main		Aux		
		NO	NC	NO	NC	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	400 Hz	60 Hz	
Resistive	50	200												
Inductive	10	100												
Inductive														
Motor	50	200												
Lamp														
Transfer load														2/
Mechancial life reduced current	100	50												
Intermediate current	50	20												

1/ Absence of value indicates relay is not rated for 3 phase application.
2/ Transfer load indicates relay suitable for transfer between unsynchronized ac power supplies at rating indicated.

PREPARING ACTIVITY: Air Force-85
CUSTODIANS: ARMY - AIR FORCE - 85 NAVY - AS DLA -
REVIEW: Air Force- 11, 99 Navy - AS, EC
USER:
PROJECT NUMBER: 5945-0803-01
DISTRIBUTION STATEMENT A: Approved for public release, distribution is unlimited

MILITARY SPECIFICATION SHEET
TITLE RELAYS, ELECTROMAGNETIC 200 AMPERES, 1PST (NO), TYPE II, NON-HERMETICALLY SEALED

SPECIFICATION SHEET NUMBER MS24171F
SUPERSEDING MS24171E
AMSC N/A
FSC 5945

Page 4 of 5

DD Form 672, MAY 88

Form Approved OMB No. 0704-0188

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:49Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(s) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-R-6106

DD Form 672, MAY 88

PREPARING ACTIVITY: Air Force-85
CUSTODIANS: ARMY - AS, AIR FORCE - 85, NAVY - AS, DLA -
REVIEW: Air Force- 11, 99
USER: Navy - AS, EC
PROJECT NUMBER: 5945-0303-01
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited

MILITARY SPECIFICATION SHEET

TITLE: RELAYS, ELECTROMAGNETIC 200 AMPERES, 1PST (NO), TYPE II, NON-HERMETICALLY SEALED

SPECIFICATION SHEET NUMBER: MS24171F
SUPERSEDING: MS24171E
AMSC: N/A
FSC: 5945
Page 5 of 5

ENVIRONMENTAL CHARACTERISTICS

Temperature range	-55° to +71°C
Maximum altitude rating	50,000 ft
Shock G-level	25 g's
Duration	6-9 ms
Max duration contact opening	2 ms
Vibration - Sinusoidal (see table IV)	
Vibration - Random	N/A
High shock	N/A
Acceleration	10 g's

TABLE IV. Vibration levels.

5-10 Hz	10-55 Hz	55-250 Hz	250-500 Hz	500-1,500 Hz
.08 DA	.06 DA	2 g's	2 g's	

Qualification by similarity (see table V)

TABLE V. Qualification by similarity.

	Loads						Dynamics 1/			Environmental		
Part number MS24171-	Type 1			Type 1 ER								
	A	B	C	D	E	F	A	B	C	A	B	C
D1	4						2			4		
D2	4						2			4		

1/ For Group C testing, each dash number shall be tested to meet vibration requirements.

ELECTRICAL CHARACTERISTICS

Insulation resistance initial	100 megohms
After life or environmental tests	50 megohms
Dielectric strength (sea level)	2-5 seconds

	Inital		After life tests	
	28 V dc	115 V ac	28 V dc	115 V ac
Coil to case	1,250 V rms	N/A	1,000 V rms	N/A
Aux contacts	1,250 V rms	N/A	1,000 V rms	N/A
All other points	1,250 V rms	N/A	1,000 V rms	N/A

Dielectric strength (altitude) 1 minute

	28 V dc	115 V ac
Coil to case	500 V rms	N/A
Aux contacts	500 V rms	N/A
All other points	500 V rms	N/A

Max contact drop initial	0.150 volt
After life test	0.175 volt
Overload current	(NO) 1,600 amperes
Rupture current	(NO) 2,000 amperes
Duty rating	Continuous
RFI spec	MIL-STD-461

(Applicable to coil circuits of ac operated relays)

Form Approved OMB No. 0704-0188

Source: https://assist.dla.mil -- Downloaded: 2020-11-23T14:07Z
Check the source to verify that this is the current version before use.