FED. SUP CLASS
4730

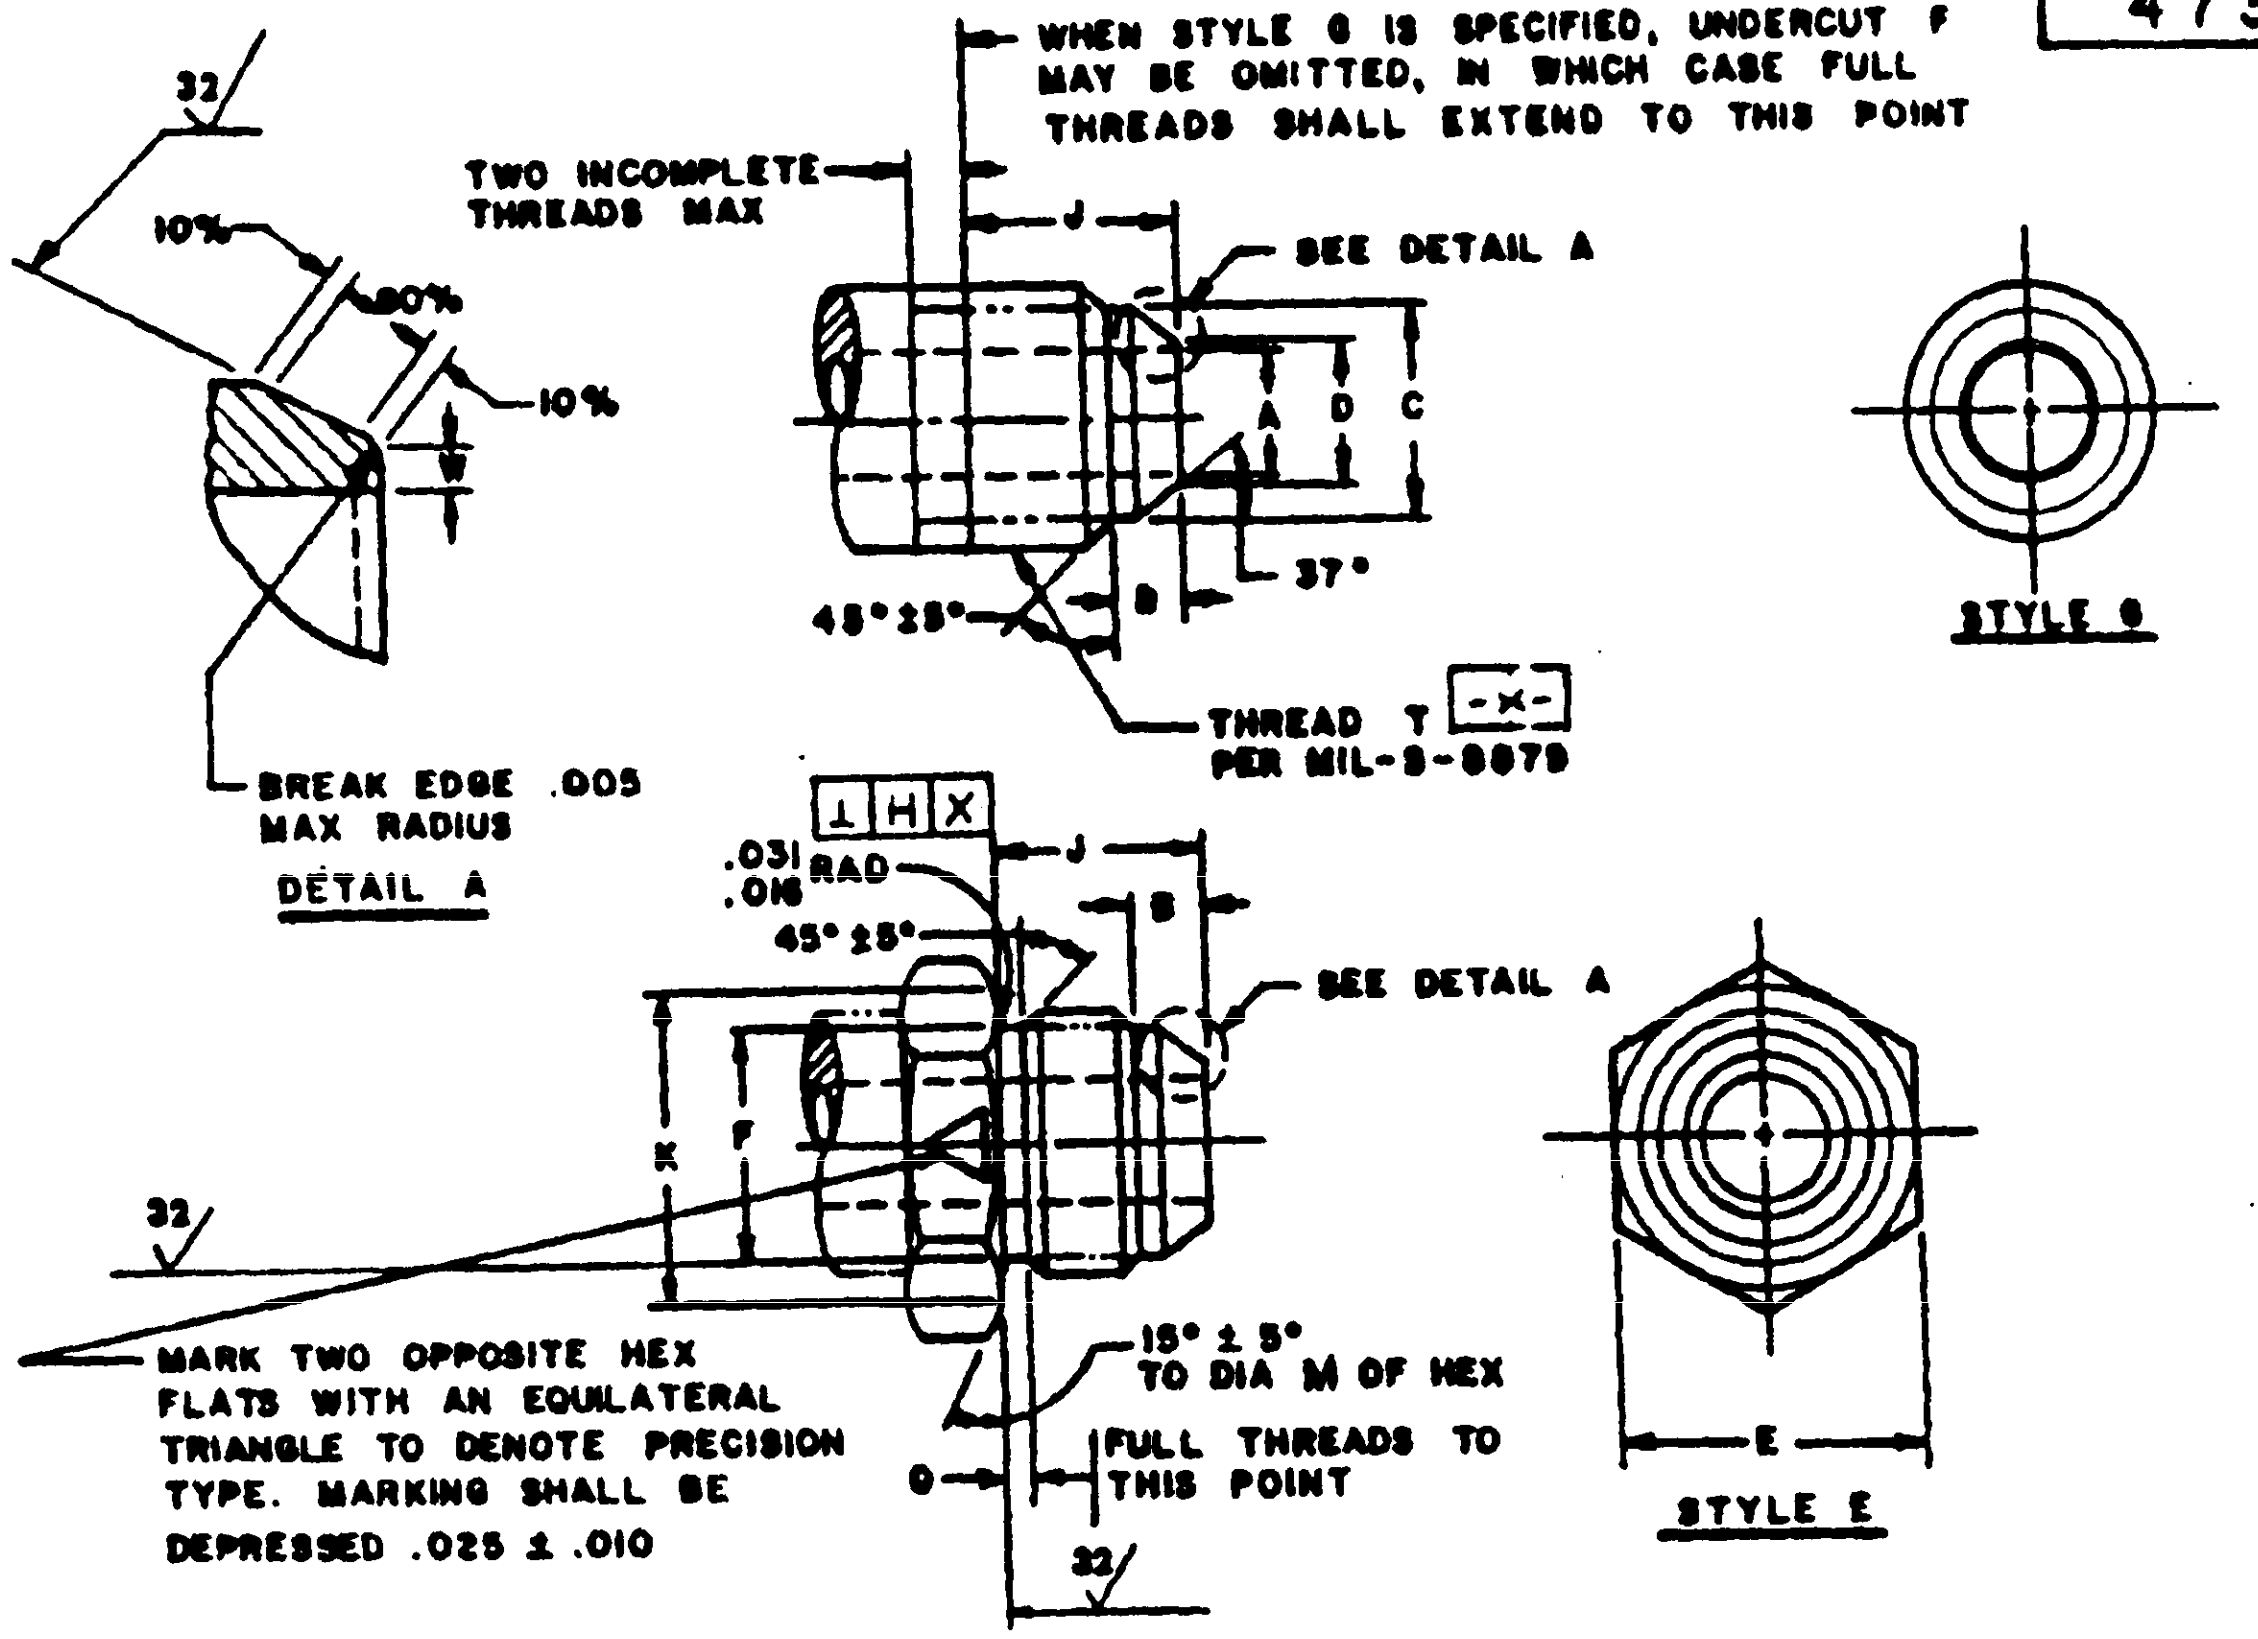
WHEN STYLE G IS SPECIFIED, UNDERCUT F MAY BE OMITTED, IN WHICH CASE FULL THREADS SHALL EXTEND TO THIS POINT
TWO INCOMPLETE THREADS MAX
32
10%
80%
10%
J
SEE DETAIL A
A
D
C
45° ± 5°
B
37°
THREAD T -X-
PER MIL-S-8879
STYLE G
BREAK EDGE .005 MAX RADIUS
DETAIL A
⊥ H X
.031 .016 RAD
45° ± 5°
J
B
SEE DETAIL A
K
F
32
MARK TWO OPPOSITE HEX FLATS WITH AN EQUILATERAL TRIANGLE TO DENOTE PRECISION TYPE. MARKING SHALL BE DEPRESSED .025 ± .010
15° ± 5° TO DIA M OF HEX
G
FULL THREADS TO THIS POINT
32
E
STYLE E

THE CONICAL SEAL SURFACE SHALL BE FREE OF FLAWS, NICKS AND CHATTER MARKS WHEN VIEWED WITH THE UNAIDED EYE. THE CENTER 80% OF THE SURFACE (SEE DETAIL A) SHALL A SO HAVE NO LOW SPOTS AND SHALL HAVE AN UNBROKEN LINE OF CONTACT TO SHOW ALL AROUND WHEN ROTATED IN CONTACT WITH A 74° 0' ± 1' INCLUDED ANGLE GAGE LIGHTLY COATED BY RUBBING WITH CARBON PAPER OR BY EQUIVALENT BLUEING METHOD.

BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS.

DIMENSIONS D, C, F AND T (PITCH DIA) SHALL HAVE CIRCULAR RUNOUT TO EACH OTHER AND WITH THE 37° ANGLE, MEASURED AND CALCULATED AS AN INCLUDED ANGLE, WITHIN .005 FULL INDICATOR MOVEMENT. OTHER DIAMETERS SHALL HAVE CIRCULAR RUNOUT TO EACH OTHER WITHIN .010 FIM.

ALL MACHINED SURFACES SHALL BE SMOOTH TO 125 MICROINCHES Ra PER ANSI B46.1 UNLESS NOTED.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: ± 1/2°, DECIMALS ± .016

NOTES:
REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD OF THE EXTENT SPECIFIED HEREIN.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER ACQUISITION DOCUMENTS REFERENCED HEREIN.

THIS IS A DESIGN STANDARD NOT TO BE USED AS A PART NUMBER.

Ⓔ ENTIRE STANDARD REVISED

APPROVED 12 FEB 57 REVISED Ⓒ 25 OCT 74 Ⓓ 1 FEB 86 Ⓔ 3 JUNE 1988

DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNL ED

This military standard is approved by the San Antonio ALC (Code 82), Department of the Air Force and shall be used by that activity. All other military activities are required to employ this standard where suitable.

Review activities:
DLA-CS

P.A. AIR FORCE - 82 Other Cust AIR FORCE - 99	TITLE FITTING END, FLARED TUBE CONNECTION, PRECISION TYPE, STANDARD DIMENSIONS	MILITARY STANDARD MS24385(USAF)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 51 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:53Z
Check the source to verify that this is the current version before use.

This military standard is approved by the San Antonio ALC (Code 82), Department of the Air Force and shall be used by that activity. All other military activities are required to employ this standard where suitable.

Review activities:
DLA-CS

EQUIV-ALENT TUBE SIZE DASH NO	TUBING OD	THREAD T MIL-S-8879	A DIA		B +.015 -.000	C +.000 -.005 DIA	D ±.003 DIA	E		F +.002 -.003	H MAX	J ±.015	K ±.010 DIA	M ±.010 DIA	Q +.015 -.000	W MIN
-2	1/8	.3125-24UNJF-3A	.062	+.003 -.004	.177	.245	.083	.563	+.003 -.004	.250	.005	.448	.500	.549	.063	.005
-3	3/16	.3750-24UNJF-3A	.125			.307	.146	.625		.312		.479	.562	.611		
-4	1/4	.4375-20UNJF-3A	.172		.193	.359	.193	.688		.364		.550	.625	.674	.075	
-5	5/16	.5000-20UNJF-3A	.234			.421	.255	.750		.426			.687	.736		
-6	3/8	.5625-18UNJF-3A	.297	±.004	.198	.476	.318	.813		.481		.556	.750	.799	.083	
-8	1/2	.7500-16UNJF-3A	.391		.253	.654	.426	1.000		.660		.657	.937	.986	.094	.012
-10	5/8	.8750-14UNJF-3A	.484		.266	.767	.539	1.125		.773		.758	1.062	1.111	.107	.022
-12	3/4	1.0625-12UNJ-3A	.609	±.005	.315	.938	.664	1.375		.945	.008	.864	1.274	1.361	.125	
-16	1	1.3125-12UNJ-3A	.844	+.007 -.005		1.188	.913	1.625	±.016	1.195		.911	1.524	1.599		.029
-20	1-1/4	1.6250-12NJ-3A	1.078	+.008 -.005	.367	1.501	1.147	1.875		1.507		.958	1.838	1,849		
-24	1-1/2	1.8750-12NJ-3A	1.312		.378	1.750	1.381	2.125	±.020	1.756		1.083	2.093	2.095		
-28	1-3/4	2.2500-12UNJ-3A	1.547	+.010 -.005	.451	2.125	1.646	2.500		2.131		1.208	2.468	2.470		.044
-32	2	2.5000-12UNJ-3A	1.781		.461	2.375	1.880	2.750		2.381		1.333	2.718	2.720		

THIS IS A DESIGN STANDARD, NOT TO BE USED AS A PART NUMBER

APPROVED 12 FEB 57 REVISED Ⓒ 25 OCT 74 Ⓓ 1FEB 85 Ⓔ 3 JUNE 1988

FED. SUP CLASS
4730

P.A. AIR FORCE-82
Other Cust
AIR FORCE 99

TITLE
FITTING END, FLARED TUBE CONNECTION, PRECISION TYPE,
STANDARD DIMENSIONS

MILITARY STANDARD

MS24385(USAF)

PROCUREMENT SPECIFICATION
NONE

SUPERSEDES:

SHEET 2 OF 2

DD FORM 1 SEP 67 672-1 (Limited Coordination)
ASO use only

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:53Z
Check the source to verify that this is the current version before use.