FED SUP CLASS
5930

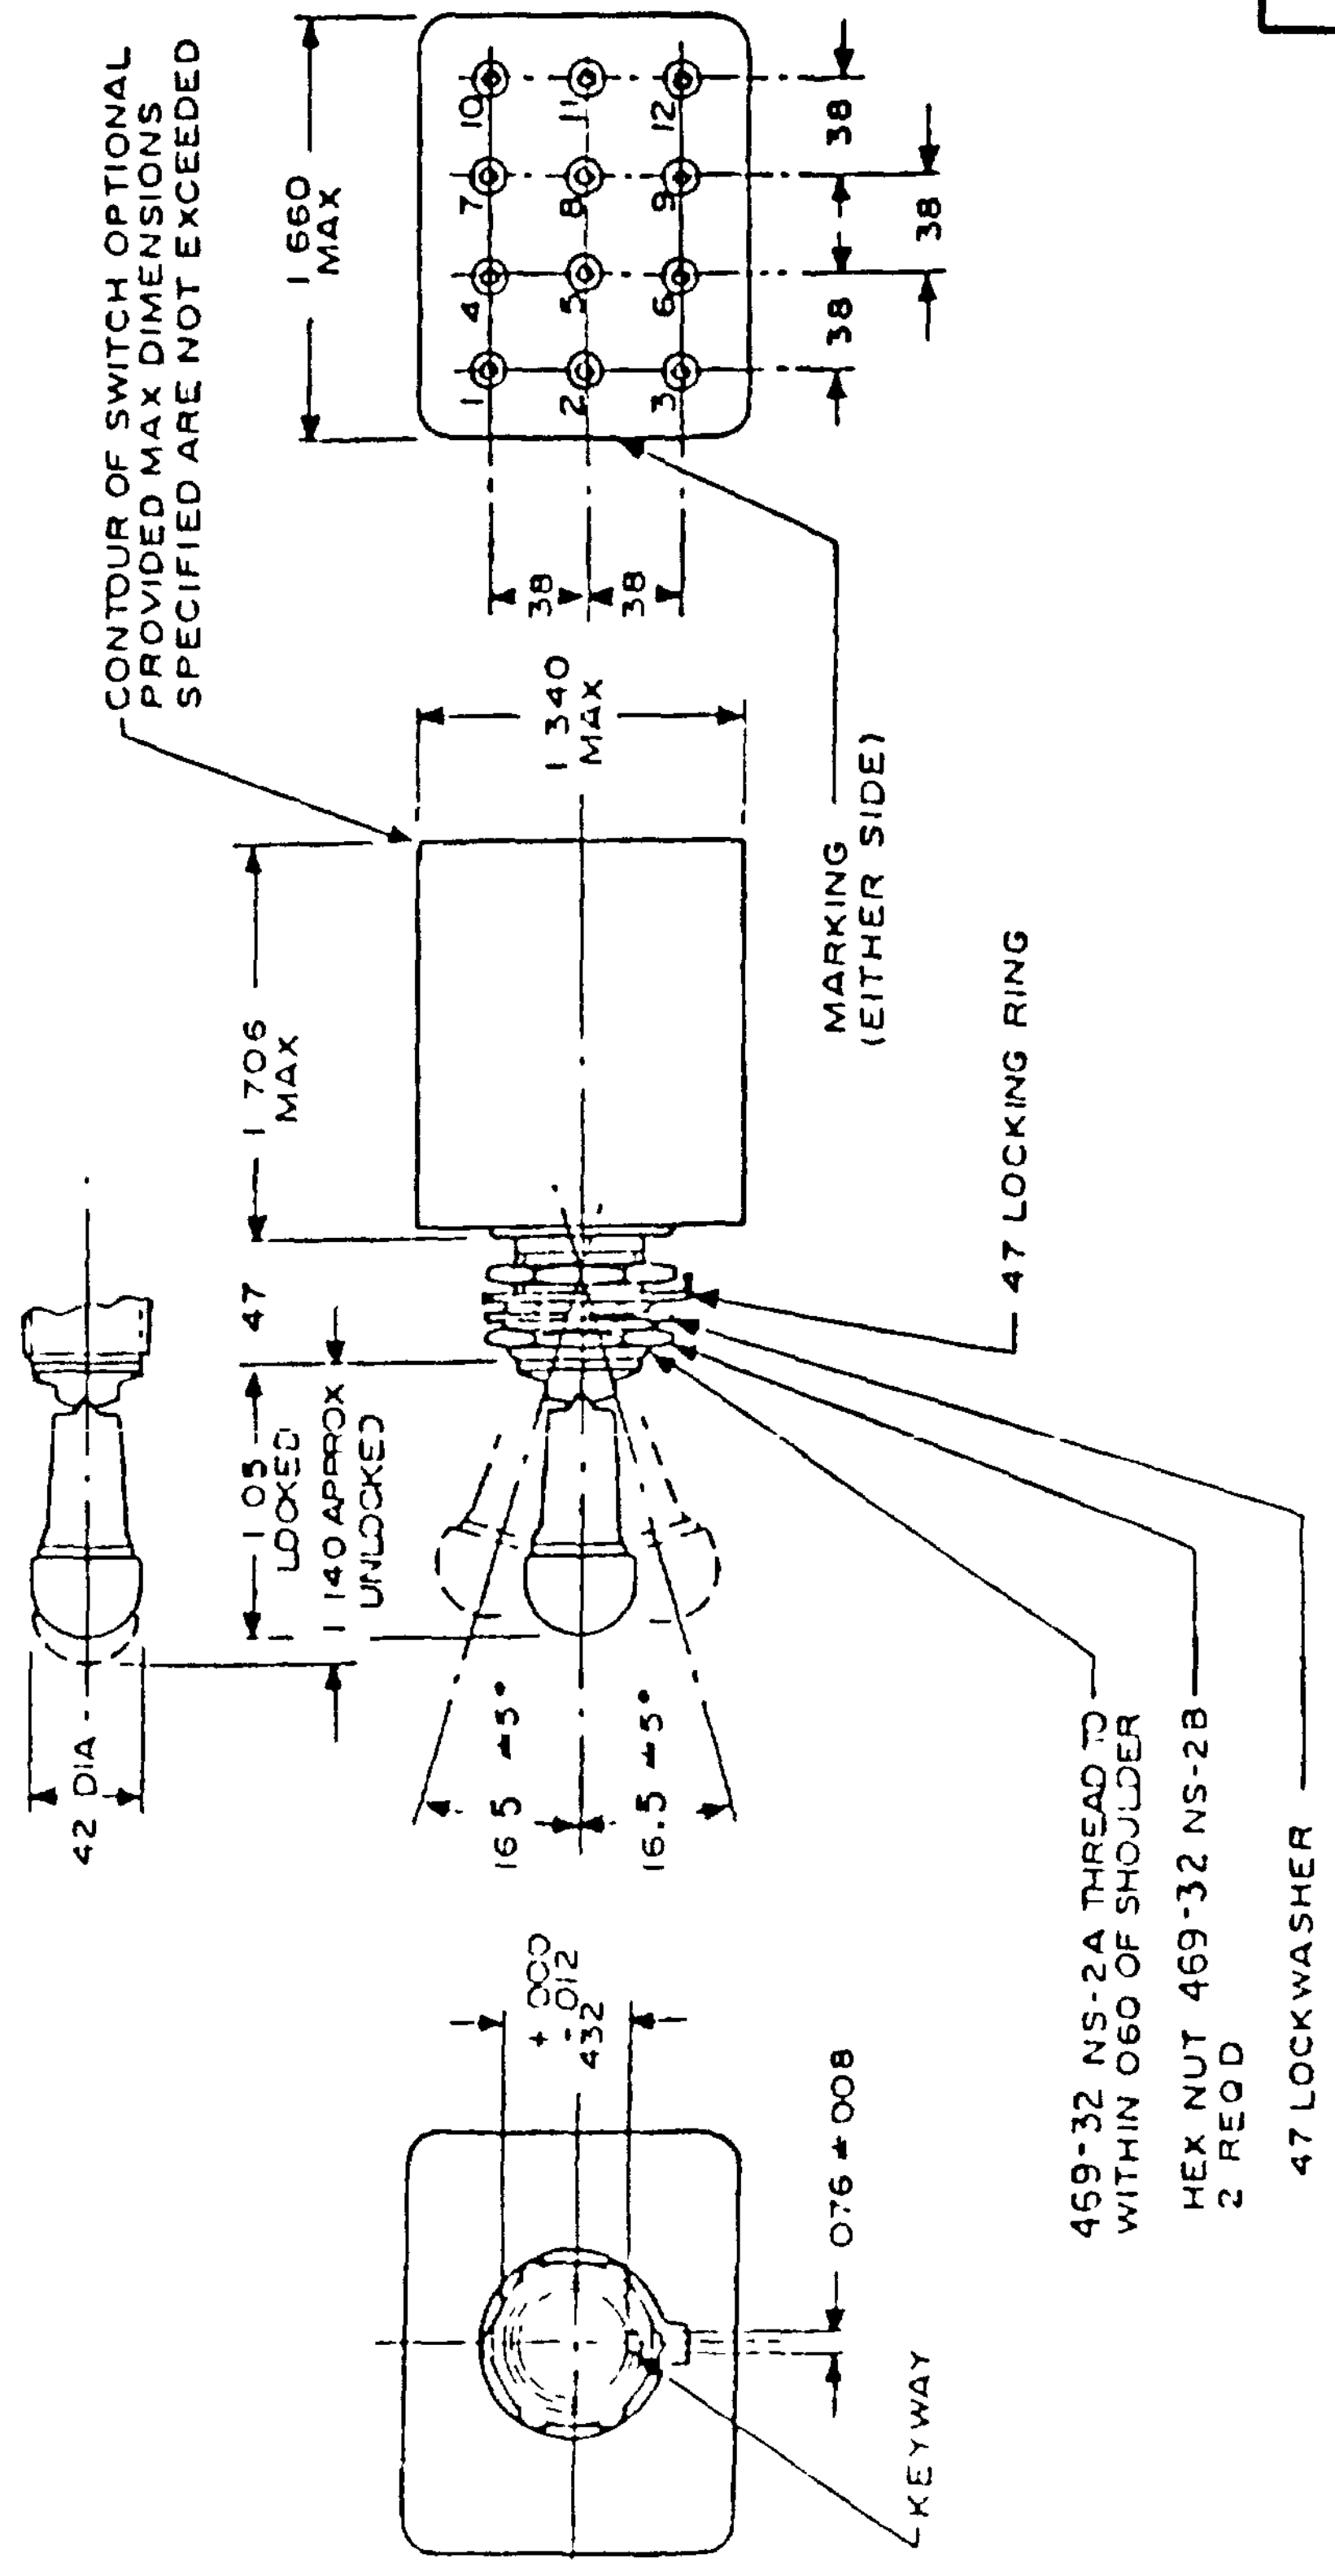

CONTOUR OF SWITCH OPTIONAL PROVIDED MAX DIMENSIONS SPECIFIED ARE NOT EXCEEDED
1.660 MAX
10
11
12
7
8
9
4
5
6
1
2
3
.38
.38
.38
.38
.38
1.340 MAX
MARKING (EITHER SIDE)
1.706 MAX
.47 LOCKING RING
.47
1.05 LOCKED
1.140 APPROX UNLOCKED
.42 DIA
16.5° ±5°
16.5° ±5°
+.000
-.012
.432
.076 ±.008
KEYWAY
.469-32 NS-2A THREAD TO WITHIN .060 OF SHOULDER
HEX NUT .469-32 NS-2B 2 REQD
.47 LOCKWASHER

Ⓒ Denotes changes

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection [illegible] all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AV, Navy - EC, Air Force - 99, DLA - ES

User activity: Air Force - 11

APPROVED 15 May 1972

REVISED Ⓐ 14 May 1974 Ⓑ 25 Apr 1975 Ⓒ 28 Sep 1987

Custodians: Air Force - 85 Other Cust: Army - ER Navy - AS	International interest	TITLE SWITCH, TOGGLE, FOUR POLE, ENVIRONMENTALLY SEALED, LEVER-LOCK, INTEGRATED WIRE TERMINALS	MILITARY STANDARD MS27783
Procurement Specification MIL-S-3950		SUPERSEDES	PAGE 1 OF 4

DD FORM 1 MAY 65 672 *(Coordinated)* PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5930-1358-22

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

FED SUP CLASS
5930

Inches	mm	Inches	mm
.005	0.13	.432	10 97
.008	0.20	469	11 91
012	0 30	.47	11.9
.020	0.51	1 05	26.7
.060	1 52	1.140	28.96
.076	1 93	1 340	34 04
.38	9 7	1 660	42.16
42	10 7	1 706	43 33

NOTES

1 Dimensions are inches
2 Metric equivalents are given for general information only
3 Unless otherwise specified, tolerance is ±.020 (0 51 mm) for two place decimals and ± 005 (0.13 mm) for three place decimals
4. For hardware detail specifications, see appendix of MIL-S-3950
Ⓒ 5. Contact installing/removal tool in accordance with M81969/14-03
Ⓒ 6. Grommet sealing plug in accordance with MS27488A16
7 Sealing grommet shall seal on a smooth wire insulation of 068 (1 73 mm) to .103 (2.62 mm) diameters
Ⓒ 8 Terminal shall adequately accept a wire contact within dimensional limits of M39029/1-102.
9 The terminal end of switch shall be color coded blue to indicate contact size
10 Direction of internal mechanism movement is opposite to the direction of the toggle movement.
11 Sealing plugs may be used in nonfunctional grommet holes
12 Maximum weight is .227 pound
13 Locking arrangement Positive locking shall be accomplished and shall prevent motion of the toggle lever until the locking mechanism is manually released
14 The force required to release the locking mechanism shall be 3 to 5 pounds
15 The locking means at the top of the toggle bushing shall be capable of withstanding a torque of 20 inch-pounds applied in both directions immediately following the humidity test.
16 Part number example MS27783-21A (locking combination 'A')
Ⓒ 17. In the event of a conflict between the text of this standard and the reference cited herein, the text of this standard shall take precedence
Ⓒ 18 Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Review activities Army - AV
Navy - EC
Air Force - 99
DLA - ES

User activity Air Force - 11

APPROVED 15 May 1972 REVISED Ⓒ For changes see page 2

P A Air Force - 85 Other Cust Army - EP Navy - AS	International interest	TITLE SWITCH, TOGGLE, FOUR POLE, ENVIRONMENTALLY SEALED, LEVER-LOCK, INTEGRATED WIRE TERMINALS	MILITARY STANDARD MS27783
Procurement Specification MIL-S-3950		SUPERSEDES	PAGE 2 OF 4

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design application and for repetitive use shall be made from this document when applicable.

Review activity [illegible]
Air Force - 99
DLA - ES

User activity Air Force - 11

FED SUP CLASS
5930

Locking combinations

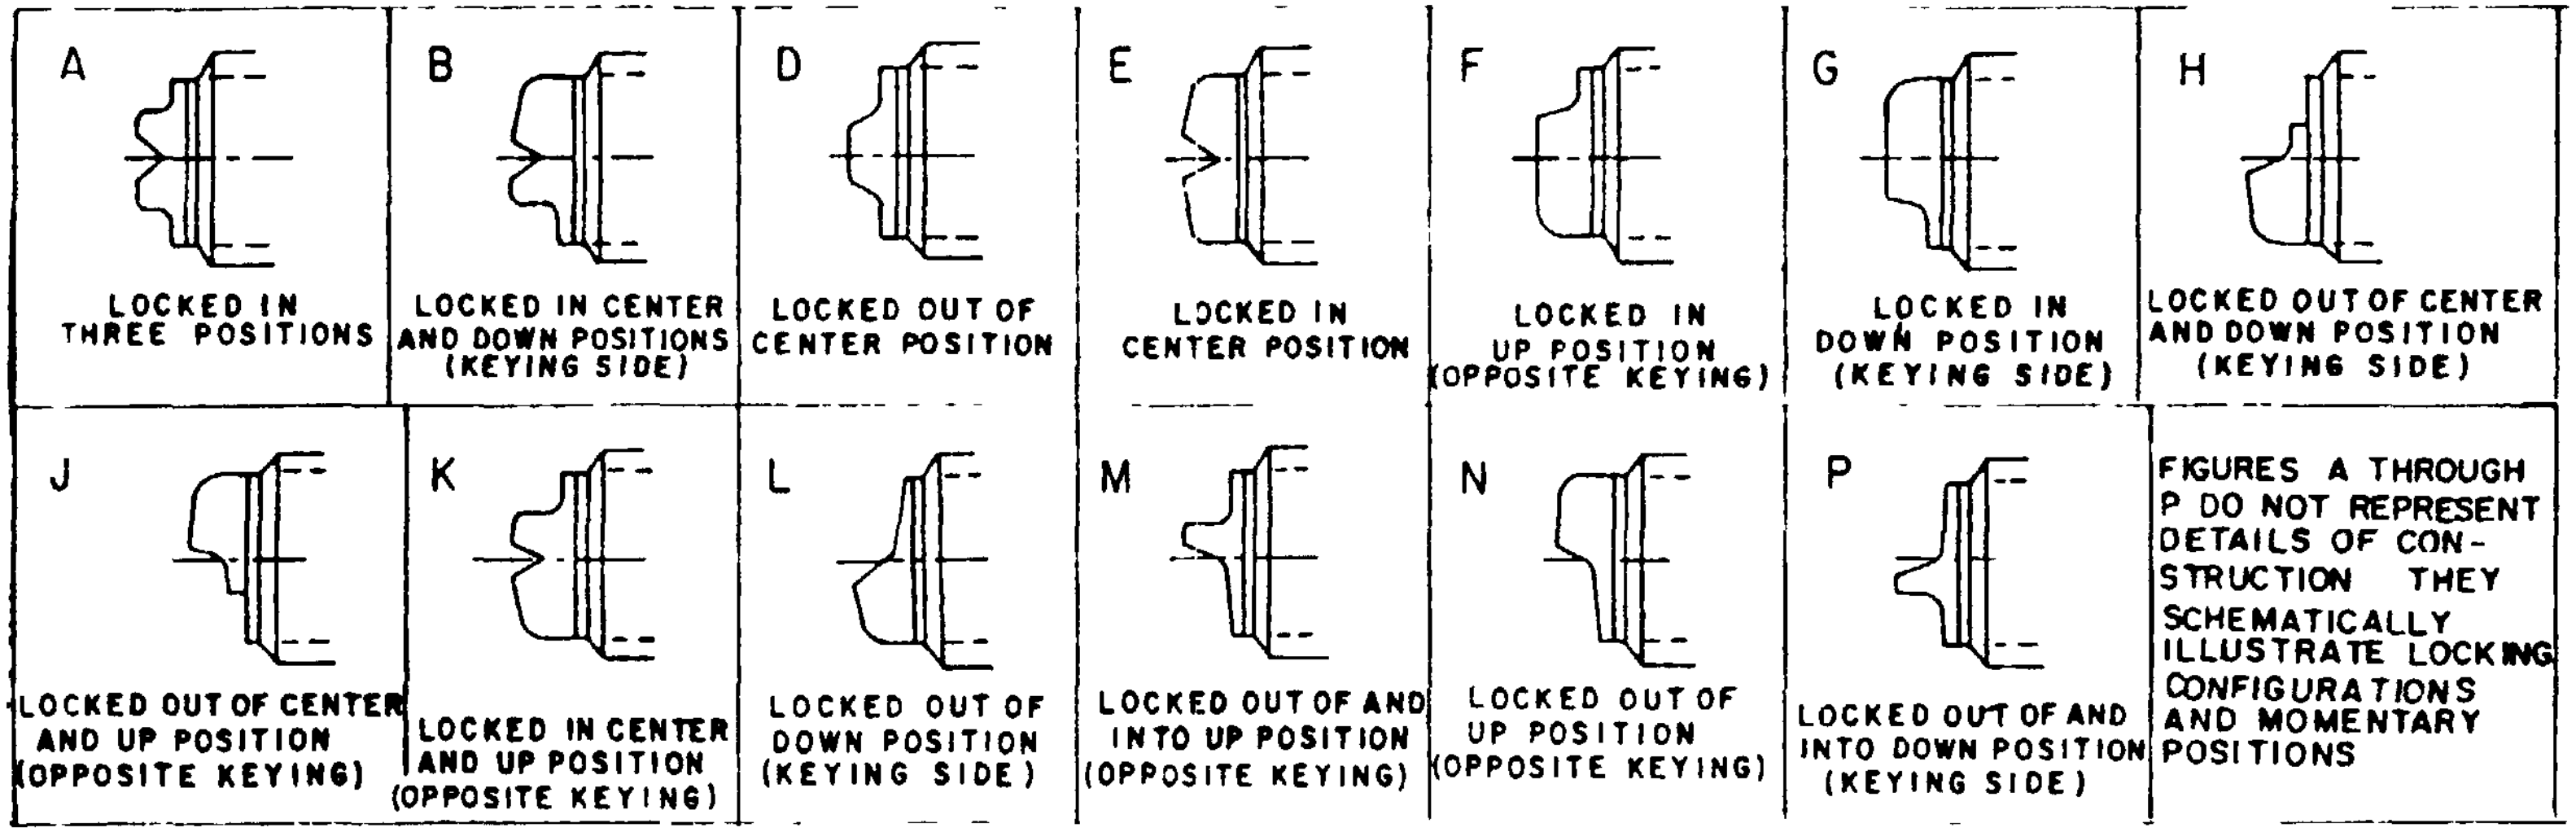
A LOCKED IN THREE POSITIONS

B LOCKED IN CENTER AND DOWN POSITIONS (KEYING SIDE)

D LOCKED OUT OF CENTER POSITION

E LOCKED IN CENTER POSITION

F LOCKED IN UP POSITION (OPPOSITE KEYING)

G LOCKED IN DOWN POSITION (KEYING SIDE)

H LOCKED OUT OF CENTER AND DOWN POSITION (KEYING SIDE)

J LOCKED OUT OF CENTER AND UP POSITION (OPPOSITE KEYING)

K LOCKED IN CENTER AND UP POSITION (OPPOSITE KEYING)

L LOCKED OUT OF DOWN POSITION (KEYING SIDE)

M LOCKED OUT OF AND INTO UP POSITION (OPPOSITE KEYING)

N LOCKED OUT OF UP POSITION (OPPOSITE KEYING)

P LOCKED OUT OF AND INTO DOWN POSITION (KEYING SIDE)

FIGURES A THROUGH P DO NOT REPRESENT DETAILS OF CONSTRUCTION. THEY SCHEMATICALLY ILLUSTRATE LOCKING CONFIGURATIONS AND MOMENTARY POSITIONS

APPROVED 15 May 1972 **REVISED** Ⓒ For changes see page 2

P A Air Force - 85 Other Cust Army - ER Navy - AS	International interest	TITLE SWITCH, TOGGLE, FOUR POLE, ENVIRONMENTALLY SEALED, LEVER-LOCK, INTEGRATED WIRE TERMINALS	**MILITARY STANDARD** MS27783
Procurement Specification MIL-S-3950		SUPERSEDES	PAGE 3 OF 4

DD FORM 1 MAY 72 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Review activities
Army - AV
Navy - EC
Air Force - 99
DLA - ES

User activity
Air Force - 11

FED SUP CLASS
5930

Detail requirements

MS part number	Available locking combinations	Circuit with toggle lever in			Current capacity (amperes) 28 volts dc			Current capacity (amperes) 115 volts, 60 and 400 hertz ac		
		Keying side	Center	Opposite keying side	Lamp-load circuit	Resistive circuit	Inductive circuit	Lamp-load circuit	Resistive circuit	Inductive circuit
MS27783-1	All	1-2 4-5 7-8 On 10-11	2-3 4-5 7-8 On 11-12	2-3 5-6 8-9 On 11-12	5	20	12	4	15	15
MS27783-2	E, F, K, L, M, N	1-2 Mom. 4-5 7-8 on 10-11	2-3 4-5 7-8 On 11-12	2-3 5-6 8-9 On 11-12						
MS27783-3	E, L, N	1-2 Mom. 4-5 7-8 on 10-11	2-3 4-5 7-8 On 11-12	2-3 Mom. 5-6 8-9 On 11-12	4	18	10	2	11	8
MS27783-21	All	1-2 7-8 4-5 On 10-11	Off	2-3 8-9 5-6 On 11-12						
MS27783-22	D, F, G	Off	None	2-3 8-9 5-6 On 11-12	5	20	12	4	15	15
MS27783-23	D, F, G	1-2 7-8 4-5 On 10-11	None	2-3 8-9 5-6 On 11-12						
MS27783-24	E, F, K, M	None	Off	2-3 8-9 5-6 On 11-12						
MS27783-25	F	None	Mom. off	2-3 8-9 5-6 On 11-12						
MS27783-26	F	1-2 Mom. 7-8 4-5 on 10-11	None	2-3 8-9 5-6 On 11-12						
MS27783-27	E, L, N	1-2 Mom 7-8 4-5 on 10-11	Off	2-3 Mom. 8-9 5-6 on 11-12						
MS27783-28	E	1-2 Mom. 7-8 4-5 on 10-11	Off	None	4	18	10	2	11	8
MS27783-29	F	Mom off	None	2-3 8-9 5-6 On 11-12						
MS27783-30	F	1-2 Mom 7-8 4-5 on 10-11	None	Off						
MS27783-31	E, F, K, L, M, N	1-2 Mom 7-8 4-5 on 10-11	Off	2-3 8-9 5-6 On 11-12						
MS27783-32	E	None	1-2 7-8 4-5 On 10-11	2-3 Mom. 8-9 5-6 on 11-12						
MS27783-33	E, F, K, M	None	1-2 7-8 4-5 On 10-11	2-3 8-9 5-6 On 11-12	5	20	12	4	15	15

Test requirements

Test shall be performed in accordance with MIL-S-3950 except

a. During all tests, switches shall be fully wired with appropriate wire and terminal contacts
b. Contact voltage drop - the contact voltage drop with two terminals and the switch contact in series shall not exceed 8 millivolts measured from one wire contact through the contacts to the other wire contacts

APPROVED 15 May 1972 REVISED Ⓒ For changes see page 2

P A
Air Force - 85
Other Cust
Army - ER
Navy - AS

International interest

TITLE
SWITCH, TOGGLE, FOUR POLE,
ENVIRONMENTALLY SEALED,
LEVER-LOCK, INTEGRATED
WIRE TERMINALS

MILITARY STANDARD

MS27783

Procurement Specification
MIL-S-3950

SUPERSEDES

PAGE 4 OF 4

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE