This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR
Navy - EC, SH
Air Force - 11, 17, 99

User activities: Army - AV
Navy -
Air Force -

FED. SUP. CLASS
5935

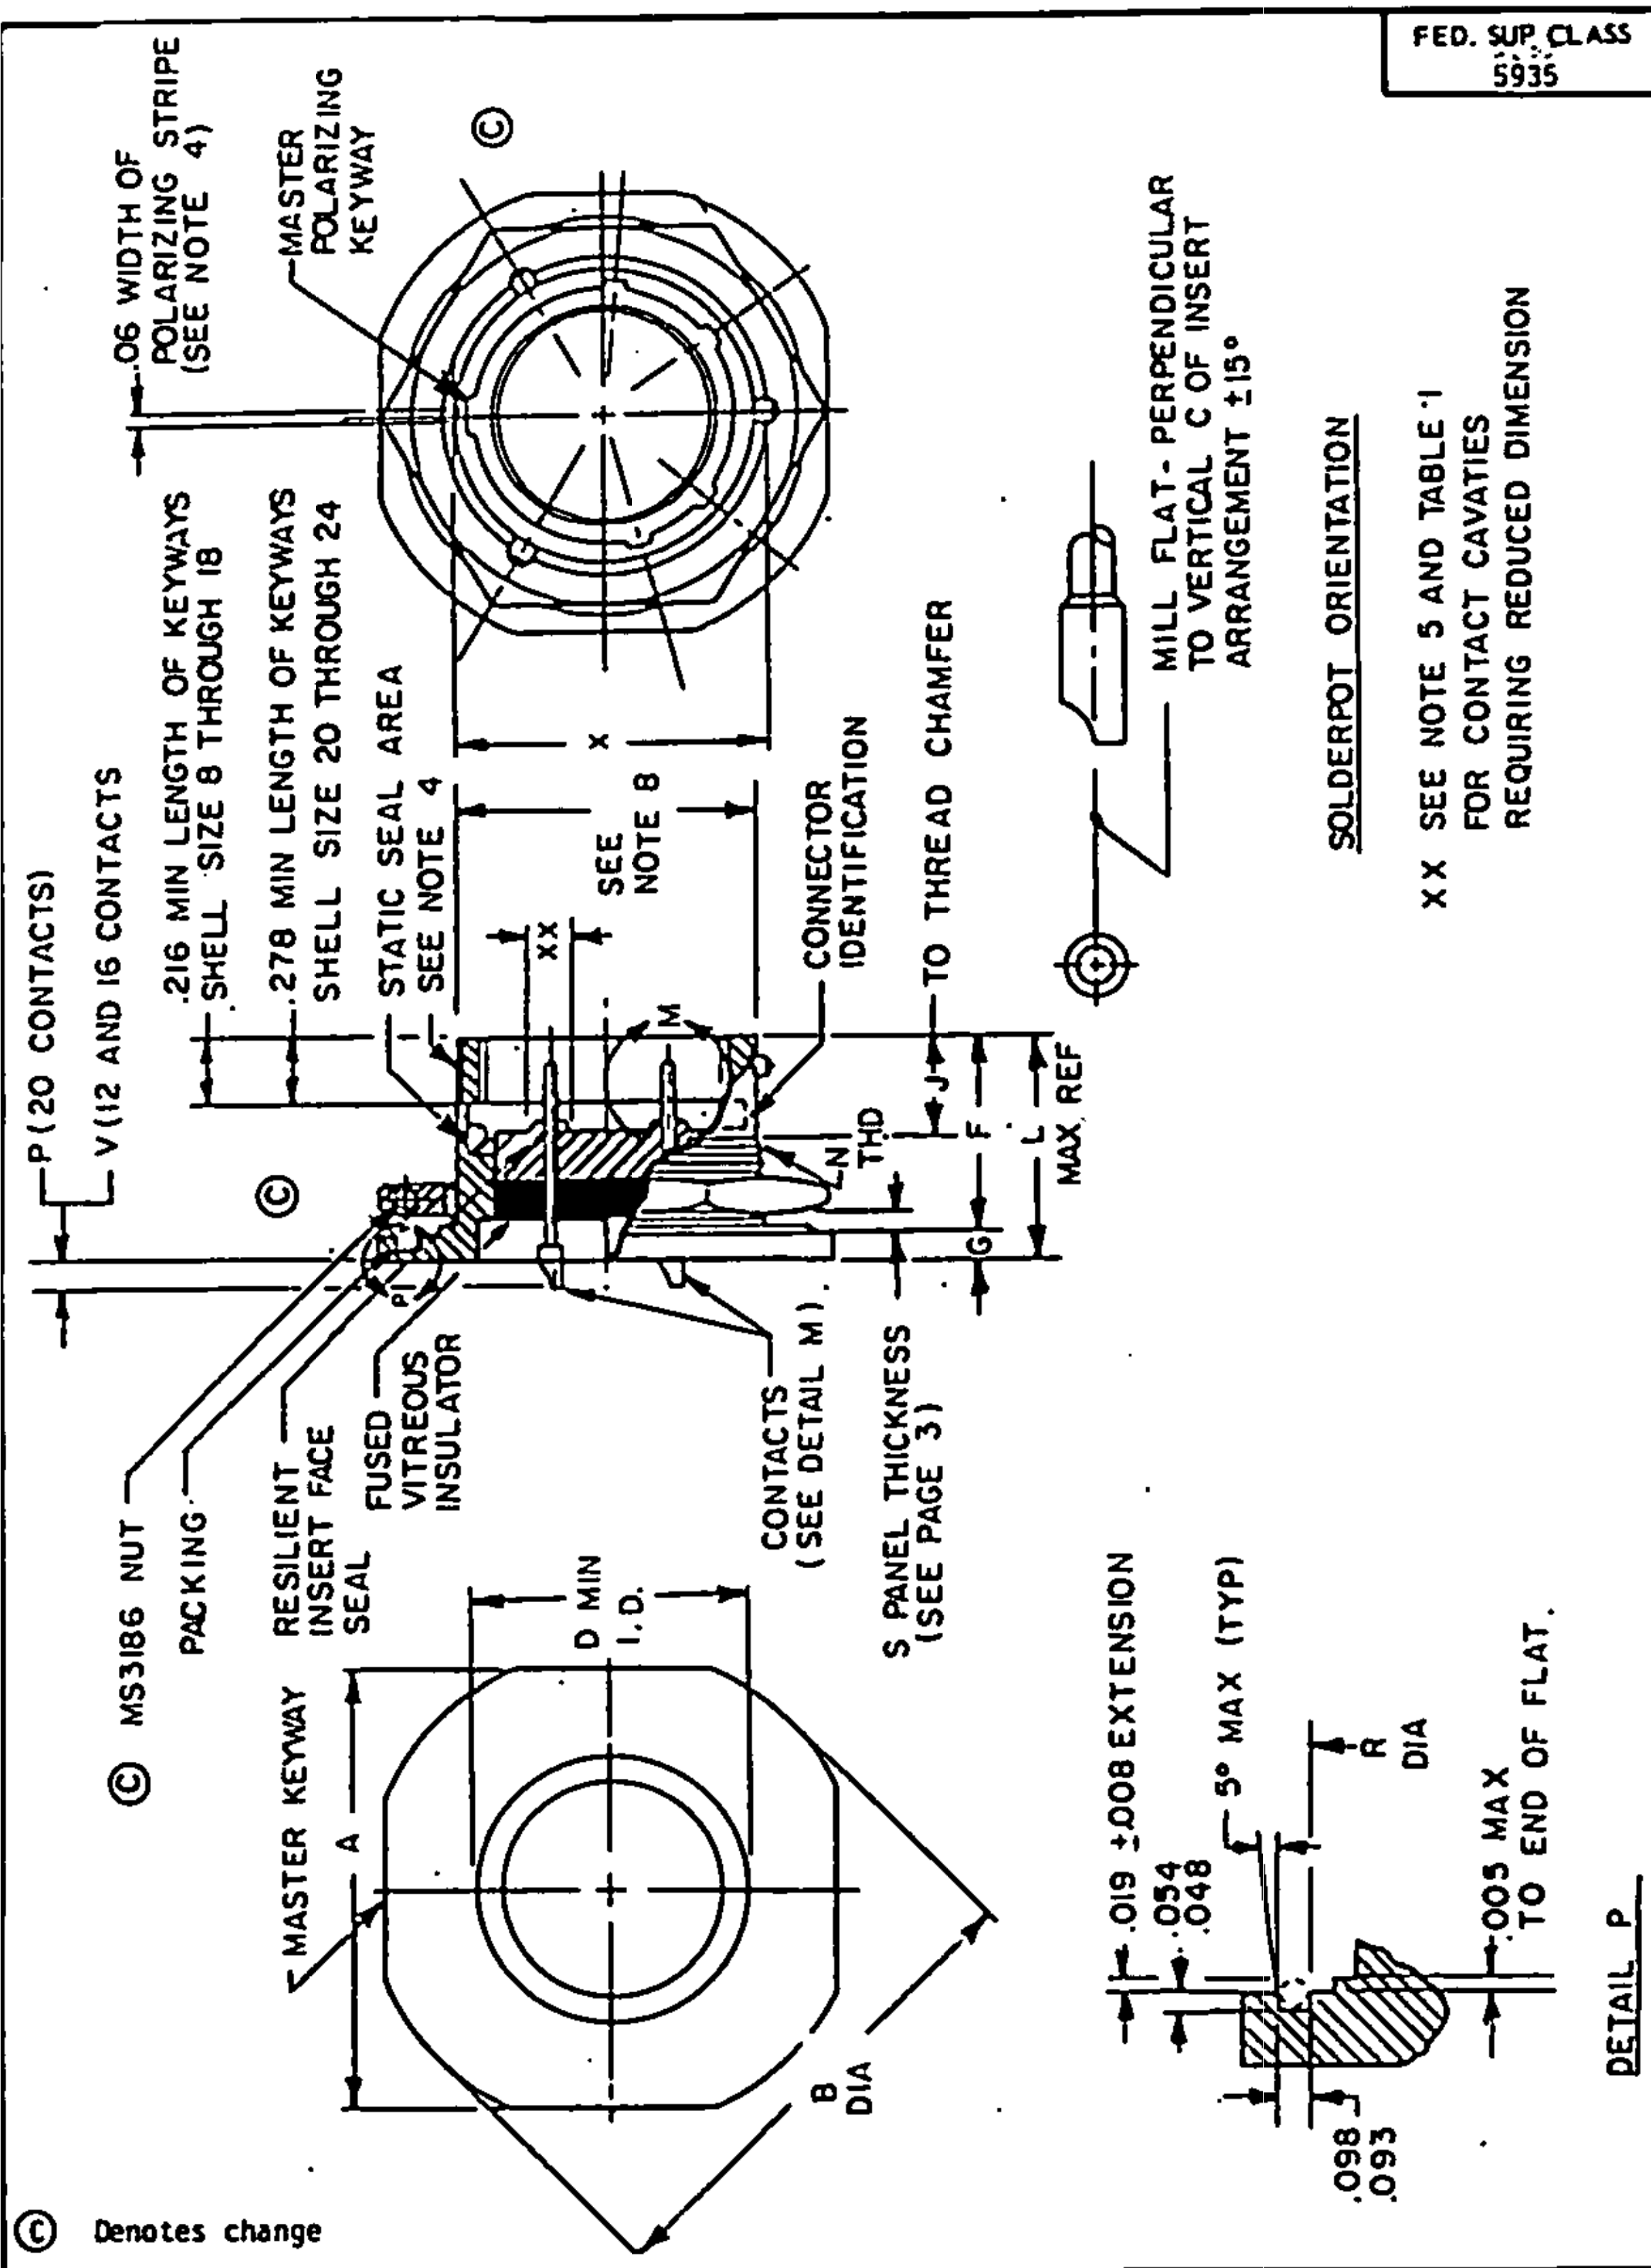

.06 WIDTH OF POLARIZING STRIPE (SEE NOTE 4)
MASTER POLARIZING KEYWAY
©
P (20 CONTACTS)
V (12 AND 16 CONTACTS)
.216 MIN LENGTH OF KEYWAYS SHELL SIZE 8 THROUGH 18
.278 MIN LENGTH OF KEYWAYS SHELL SIZE 20 THROUGH 24
STATIC SEAL AREA SEE NOTE 4
SEE NOTE 8
X
XX
M
CONNECTOR IDENTIFICATION
TO THREAD CHAMFER
J
F
L MAX REF
N THD
G
©
MILL FLAT - PERPENDICULAR TO VERTICAL C OF INSERT ARRANGEMENT ±15°
SOLDERPOT ORIENTATION
XX SEE NOTE 5 AND TABLE I FOR CONTACT CAVATIES REQUIRING REDUCED DIMENSION
© MS3186 NUT
PACKING
RESILIENT INSERT FACE SEAL
FUSED VITREOUS INSULATOR
P
CONTACTS (SEE DETAIL M)
S PANEL THICKNESS (SEE PAGE 3)
MASTER KEYWAY
A
D MIN I.D.
B DIA
.019 ±.008 EXTENSION
.054
.048
5° MAX (TYP)
R DIA
.005 MAX TO END OF FLAT
.098
.093
DETAIL P

© Denotes change

| APPROVED | 1 Apr 71 |
|---|---|
| REVISED | Ⓐ 5, Sep 75 |
| | Ⓑ 31 July 1978 |
| | © 29 October 1986 |

|  |  |  |  |
|---|---|---|---|
| P.A<br>Army - CR<br>Other Cust<br>Navy - AS<br>AF - 85 | International Interest | TITLE<br>CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, SINGLE HOLE MOUNT, BAYONET COUPLING, SOLDER PIN CONTACT, CLASS H | MILITARY STANDARD<br>MS3449 |
| Procurement Specification<br>MIL-C-26482 | | SUPERSEDES:<br>MS3449 (Navy) | PAGE 1 OF 5 |

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5935-3558-01
AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FED. SUP CLASS
5935

## ENGAGING END OF CONTACTS

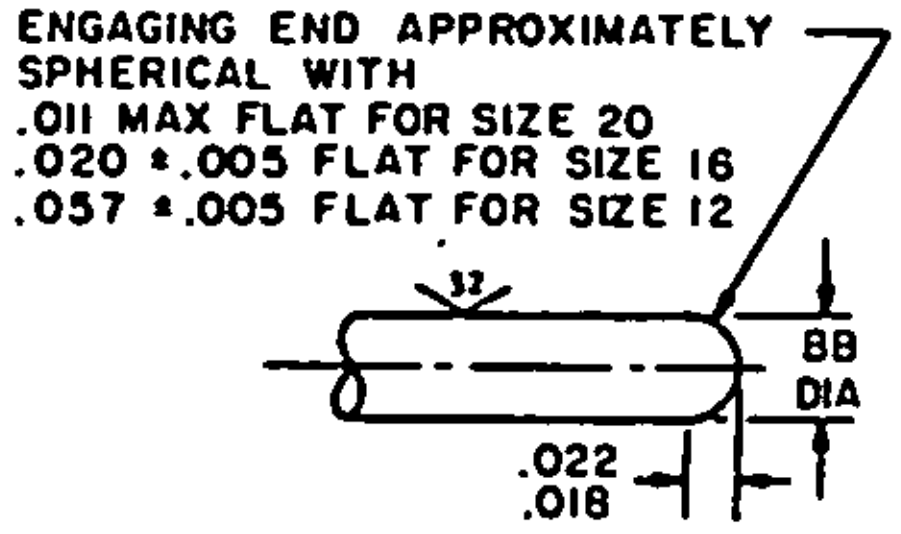
ENGAGING END APPROXIMATELY
SPHERICAL WITH
.011 MAX FLAT FOR SIZE 20
.020 ±.005 FLAT FOR SIZE 16
.057 ±.005 FLAT FOR SIZE 12
32
BB
DIA
.022
.018

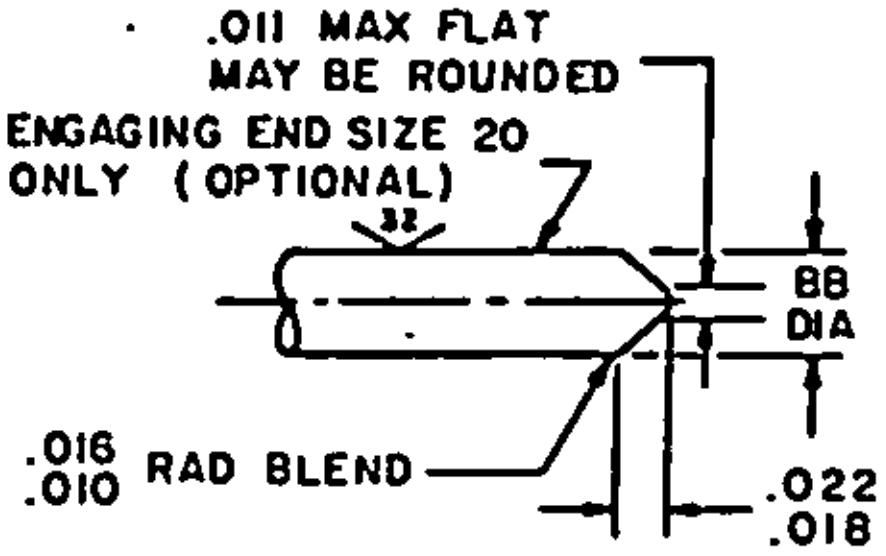

## TERMINATION END OF CONTACTS

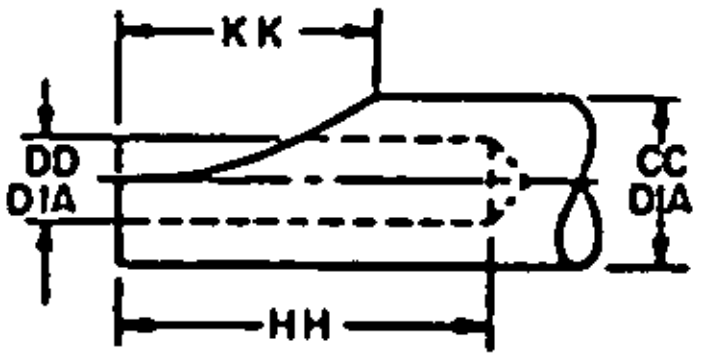

SOLDER POT

## PANEL CUTOUT

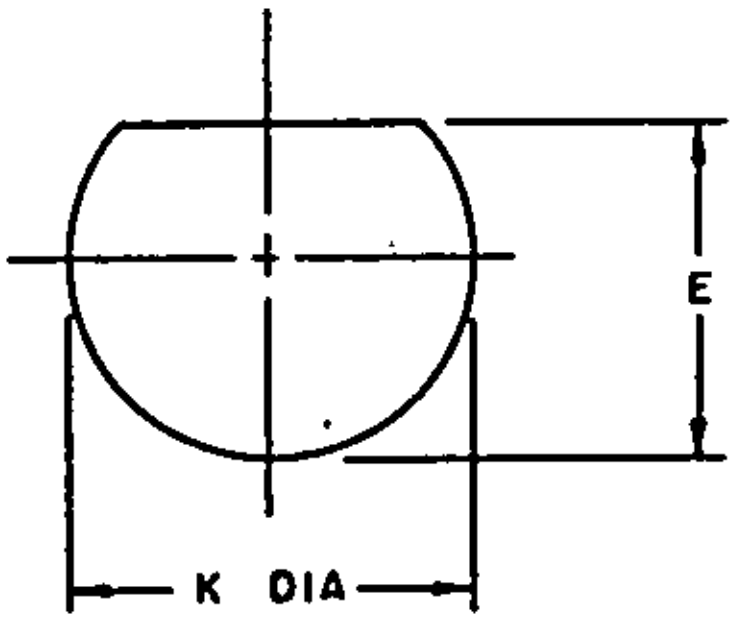

DETAIL M

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR
Navy - EC, SH
Air Force - 11, 17, 99

User activities: Army - AV
Navy -
Air Force -

APPROVED 1 April 71 REVISED (C) For changes see pages 1, 3, and 5.

P.A
Army - CR
Other Cust
Navy - AS
AF - 85

International interest

TITLE
CONNECTORS, RECEPTACLE, ELECTRIC,
SERIES 2, SINGLE HOLE MOUNT, BAYONET
COUPLING, SOLDER, PIN CONTACT,
CLASS H

MILITARY STANDARD

MS3449

Procurement Specification
MIL-C-26482

SUPERSEDES:
MS3449 (Navy)

DD FORM 1 MAY 73 672 (Continued) previous edition of this form are obsolete.

FED. SUP CLASS
5935

| Shell size | A | B | D | E | F | G | J | K | L |
|---|---|---|---|---|---|---|---|---|---|
| 8 | .954/.923 | 1.078/1.047 | .403 | .536 | .707/.691 | .113/.097 | .378/.358 | .572 | .820 |
| 10 | 1.078/1.047 | 1.203/1.172 | .515 | .661 | .707/.691 | .113/.097 | .378/.358 | .697 | .820 |
| 12 | 1.266/1.235 | 1.391/1.360 | .630 | .824 | .707/.691 | .113/.097 | .378/.358 | .895 | .820 |
| 14 | 1.391/1.360 | 1.516/1.485 | .755 | .948 | .707/.691 | .113/.097 | .378/.358 | 1.010 | .820 |
| 16 | 1.516/1.485 | 1.641/1.610 | .880 | 1.072 | .707/.691 | .113/.097 | .378/.358 | 1.135 | .820 |
| 18 | 1.641/1.610 | 1.766/1.735 | .980 | 1.197 | .707/.691 | .113/.097 | .378/.358 | 1.260 | .820 |
| 20 | 1.828/1.797 | 1.954/1.923 | 1.105 | 1.322 | .772/.754 | .148/.128 | .378/.358 | 1.385 | .920 |
| 22 | 1.954/1.923 | 2.078/2.047 | 1.230 | 1.447 | .772/.754 | .148/.128 | .379/.358 | 1.510 | .920 |
| 24 | 2.078/2.047 | 2.203/2.172 | 1.385 | 1.572 | .803/.705 | .148/.128 | .405/.385 | 1.635 | .951 |

©

| Shell size | N UNEF-2A | P | R | S | V | X | Max weight |
|---|---|---|---|---|---|---|---|
| 8 | .5625-24 | .134/.074 | .609 | .187/.062 | .204/.144 | .525 | .0430 |
| 10 | .6875-24 | .134/.074 | .734 | .187/.062 | .204/.144 | .650 | .0610 |
| 12 | .875-20 | .134/.074 | .921 | .187/.062 | .204/.144 | .813 | .0880 |
| 14 | 1.000-20 | .134/.074 | 1.046 | .187/.062 | .204/.144 | .937 | .1100 |
| 16 | 1.125-18 | .134/.074 | 1.171 | .187/.062 | .204/.144 | 1.061 | .1310 |
| 18 | 1.250-18 | .134/.074 | 1.296 | .187/.062 | .204/.144 | 1.186 | .1720 |
| 20 | 1.375-18 | .099/.039 | 1.484 | .250/.062 | .169/.109 | 1.311 | .2110 |
| 22 | 1.500-18 | .099/.039 | 1.609 | .250/.062 | .169/.109 | 1.436 | .2420 |
| 24 | 1.625-18 | .069/.009 | 1.734 | .250/.062 | .139/.079 | 1.561 | .2930 |

APPROVED 1 April 71 REVISED © For changes see pages 1, 3, and 5

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR
Navy - EC, SH
Air Force - 11, 17, 99

User activities: Army - AV
Navy -
Air Force -

|  |  |  |  |
|---|---|---|---|
| P.A<br>Army - CR<br>Other Cust<br>Navy - AS<br>AF - 85 | International interest | TITLE<br>CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, SINGLE HOLE MOUNT, BAYONET COUPLING, SOLDER PIN CONTACT, CLASS H | MILITARY STANDARD<br>MS3449 |
| Procurement Specification<br>MIL-C-26482 |  | SUPERSEDES:<br>MS3449 (Navy) | PAGE 3 OF 5 |

DD FORM 672, 1 MAY 73

FED. SUP CLASS
5935

| Cont size | BB | CC | DD | HH | KK |
|---|---|---|---|---|---|
| 20 | .041/.039 | .088/.061 | .048/.042 | .188/.109 | .110/.068 |
| 16 | .0635/.0615 | .116/.096 | .075/.069 | .251/.172 | .141/.109 |
| 12 | .095/.093 | .150/.130 | .122/.112 | .251/.172 | .141/.109 |

TABLE 1. Reduced diameters (XX).

| Shell size | Insert arrangements | Contact cavities |
|---|---|---|
| 8 | -33 and -98 | A, B, C |
| 12 | -10 | C, G. |
| 14 | -12 | A, B, C, D, E, F, G, H. |
| 14 | -18 | A, C, E, G, J, L. |
| 14 | -19 | B, D, F, H, K, M. |
| 16 | -26 | A, B, C, D, E, F, G, H, J, K, L, M, N, P, R. |
| 18 | -32 | A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T. |
| 22 | -41 | A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T, U, V, W, X, Y. |

Connector part numbering:

MS3449 H 24 - C 61 P W

MS number
Class
Shell size
Termination type and shell material
Insert arrangement
Contact style
Insert position

User activities: Army - AV
Navy -
Air Force -

Review activities: Army - AR
Navy - EC, SH
Air Force - 11, 17, 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 1 April 71 REVISED Ⓒ For changes see pages 1, 3, and 5

P.A
Army - CR
Other Cust
Navy - AS
AF - 85

International Interest

TITLE
CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, SINGLE HOLE MOUNT, BAYONET COUPLING, SOLDER PIN CONTACT, CLASS H

MILITARY STANDARD
MS3449

Procurement Specification
MIL-C-26482

SUPERSEDES:
MS3449 (Navy)

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

FED. SUP CLASS
5935

| Inches | mm | Inches | mm | Inches | mm |
|---|---|---|---|---|---|
| .005 | 0.13 | .250 | 6.35 | 1.186 | 30.12 |
| .008 | 0.20 | .251 | 6.38 | 1.197 | 30.40 |
| .016 | 0.41 | .2930 | 7.442 | 1.203 | 30.56 |
| .018 | 0.46 | .358 | 9.09 | 1.205 | 30.61 |
| .019 | 0.48 | .378 | 9.60 | 1.230 | 31.24 |
| .022 | 0.56 | .403 | 10.24 | 1.235 | 31.37 |
| .039 | 0.99 | .515 | 13.08 | 1.250 | 31.75 |
| .041 | 1.04 | .525 | 13.34 | 1.266 | 32.00 |
| .042 | 1.07 | .536 | 13.61 | 1.266 | 32.16 |
| .0430 | 1.092 | .5625 | 14.288 | 1.296 | 32.92 |
| .048 | 1.22 | .572 | 14.53 | 1.311 | 33.30 |
| .054 | 1.37 | .609 | 15.47 | 1.322 | 33.58 |
| .061 | 1.55 | .650 | 16.51 | 1.375 | 34.92 |
| .0615 | 1.562 | .6875 | 17.46 | 1.385 | 35.18 |
| .062 | 1.57 | .691 | 17.55 | 1.391 | 35.33 |
| .0635 | 1.613 | .697 | 17.70 | 1.436 | 36.47 |
| .068 | 1.73 | .707 | 17.96 | 1.447 | 36.75 |
| .088 | 2.24 | .734 | 18.64 | 1.455 | 36.96 |
| .093 | 2.36 | .754 | 19.15 | 1.484 | 37.69 |
| .095 | 2.41 | .767 | 19.48 | 1.500 | 38.10 |
| .109 | 2.77 | .772 | 19.61 | 1.510 | 38.35 |
| .110 | 2.79 | .803 | 20.40 | 1.516 | 38.51 |
| .112 | 2.84 | .820 | 20.83 | 1.560 | 39.62 |
| .113 | 2.87 | .875 | 22.22 | 1.561 | 39.65 |
| .116 | 2.95 | .880 | 22.35 | 1.572 | 39.93 |
| .122 | 3.10 | .892 | 22.66 | 1.579 | 40.11 |
| .128 | 3.25 | .895 | 22.73 | 1.609 | 40.87 |
| .130 | 3.30 | .920 | 23.37 | 1.625 | 41.28 |
| .131 | 3.33 | .921 | 23.39 | 1.635 | 41.53 |
| .141 | 3.58 | .923 | 23.44 | 1.641 | 41.68 |
| .144 | 3.66 | .937 | 23.80 | 1.705 | 43.31 |
| .148 | 3.76 | .954 | 24.23 | 1.734 | 44.04 |
| .150 | 3.81 | 1.010 | 25.65 | 1.766 | 44.86 |
| .169 | 4.29 | 1.061 | 26.95 | 1.828 | 46.43 |
| .172 | 4.37 | 1.078 | 27.38 | 1.829 | 46.46 |
| .187 | 4.75 | 1.105 | 28.07 | 1.954 | 49.63 |
| .204 | 5.18 | 1.125 | 28.58 | 2.078 | 52.78 |
| .2110 | 5.359 | 1.135 | 28.83 | 2.203 | 55.96 |
| .2420 | 6.147 | 1.171 | 29.74 | | |

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerances shall be .XX ±.01 (±0.25 mm), .XXX ±.005 (±0.13 mm), angular ±1° and X°X' ±30'.
4. Polarizing stripe, color optional.
5. Insert arrangements requiring reduced diameters for raised seal barriers on outer row of contact cavities as indicated. (See table I).
6. True position tolerances specified are in accordance with ANSI Y14.5-1973.
7. For insert arrangement see MIL-STD-1669.
8. Intermateability dimensions shall be in accordance with MIL-C-26482.
9. Shell material: Cold rolled steel per QQ-S-637.
10. Shell finish: .0001 (0.003 mm) minimum tin per MIL-T-10727 over nickel per QQ-N-290.
11. The complete requirements for acquiring this connector described herein shall consist of this document and the issue in effect of MIL-C-26482.
12. For design feature purposes, this standard takes precedence over acquisition documents referenced herein.
13. Ⓒ Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.

APPROVED 1 April 71 REVISED Ⓒ For changes see pages 1, 3, and 5

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR
Navy - EC, SH
Air Force - 11, 17, 99

User activities: Army - AV
Navy -
Air Force -

P.A
Army - CR
Other Cust
Navy - AS
AF - 85

International Interest

TITLE
CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 2, SINGLE HOLE MOUNT, BAYONET COUPLING, SOLDER PIN CONTACT, CLASS H

MILITARY STANDARD

MS3449

Procurement Specification
MIL-C-26482

SUPERSEDES:
MS3449 (Navy)

PAGE 5 OF 5

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.