
FED. SUP CLASS
5315

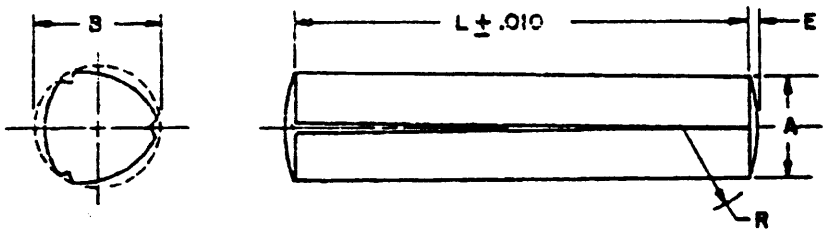

NOMINAL SIZE		3/64	1/16	5/64	3/32
A DIAMETER	MAX	.0469	.0625	.0781	.0938
	MIN	.0459	.0615	.0771	.0928
E *CROWN HEIGHT	REF	----	.0065	.0087	.0091
R RADIUS	MAX	----	.0881	.1037	.1350
	MIN	----	.0681	.0837	.1150
RECOMMENDED HOLE SIZE	MAX	.0478	.0640	.0798	.0956
	MIN	.0465	.0625	.0781	.0938
SINGLE SHEAR STRENGTH - LBS	MIN	70	120	190	270

L LENGTH	DASH NUMBER	B DIAMETER ±.001	DASH NUMBER	B DIAMETER ±.001	DASH NUMBER	B DIAMETER ±.001	DASH NUMBER	B DIAMETER ±.001
3/16	201	.051						
1/4	202	.051	206	.068	211	.084		
3/8	203	.051	207	.068	212	.084	216	.101
1/2	204	.051	208	.068	213	.084	217	.101
5/8	205	.051	209	.068	214	.084	218	.101
3/4			210	.068	215	.084	219	.101
1							220	.101

for additional sizes see sheet 2.

MATERIAL: Brass, bar or wire, 1/2 hard, in accordance with the procurement specification.
PROTECTIVE COATING: Black Oxide in accordance with the procurement specification.
APPLICATION: Grooved pins are locked securely in place by elastic deformation eliminating the need for tapping or reaming of tapered or sized holes.
DIMENSIONS: All dimensions are in inches unless otherwise specified.
PART NUMBER: The MS part number consists of the MS number plus the dash number. Example: MS35673-201.
NOTES: (1) Diameter "B" is the expanded diameter as measured with a ring gage.
(2) Ends of pins may be square with .01-inch to .02-inch radius on the edges.
(3) For design feature purposes, this standard takes precedence over procurement documents referenced herein.
(4) Referenced documents shall be of the issue in effect on date of invitations for bid.

Ⓐ ENTIRE STANDARD REVISED

REVIEWER: MI,MO,MU,WC,SH,WP,69,IS
USER: MC,YD,NSA

APPROVED 11 JAN 56 REVISED Ⓐ 17 MAR 1965

This standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

PROCUREMENT SPECIFICATION	SUPERSEDES
MIL-P-20700	AEGX2 in part

TITLE
PIN, GROOVED, HEADLESS-LONGITUDINAL
TAPER GROOVE, BRASS

MILITARY STANDARD
MS 35673
SHEET 1 OF 2

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:26Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5315

NOMINAL SIZE			1/8		5/32		3/16		1/4
A DIAMETER	MAX		.1250		.1563		.1875		.2500
	MIN		.1230		.1543		.1855		.2480
E *CROWN HEIGHT	REF		.0130		.0170		.0180		.0260
R RADIUS	MAX		.1662		.1975		.2600		.3225
	MIN		.1462		.1775		.2400		.3025
RECOMMENDED HOLE SIZE	MAX		.1271		.1587		.1903		.2534
	MIN		.1250		.1563		.1875		.2500
SINGLE SHEAR STRENGTH - LBS	MIN		490		760		1100		1960

L LENGTH	DASH NUMBER	B DIAMETER ±.002	DASH NUMBER	B DIAMETER ±.002	DASH NUMBER	B DIAMETER ±.002	DASH NUMBER	B DIAMETER ±.002
1/2	221	.134	227	.166				
5/8	222	.134	228	.166	233	.198	241	.263
3/4	223	.134	229	.166	234	.198	242	.263
1	224	.133	230	.165	235	.198	243	.263
1-1/4	225	.132	231	.164	236	.197	244	.263
1-1/2	226	.132	232	.164	237	.197	245	.262
1-3/4					238	.197	246	.262
2					239	.196	247	.262
2-1/4					240	.196	248	.262
2-1/2							249	.261
2-3/4							250	.261

*See Note (2), sheet 1.
For illustration, material, protective coating, and other pertinent data see sheet 1.

INTERCHANGEABILITY TABLE

The pins covered by the dash numbers given in original issue of this standard are cancelled after the approval date on this document. Use the dash numbers given in the preceding sheet of this revision. The cancelled pins cannot always replace the new pins and should be used until existing stocks are depleted. Use only the new pins for design and replacement. Replacement shall be in accordance with this table.

PART NUMBERS		PART NUMBERS	
CANCELLED	NEW	CANCELLED	NEW
MS35673-1	MS35673-201	MS35673-26	MS35673-226
-2	-202	-27	-227
-3	-203	-28	-228
-4	-204	-29	-229
-5	-205	-30	-230
-6	-206	-31	-231
-7	-207	-32	-232
-8	-208	-33	-233
-9	-209	-34	-234
-10	-210	-35	-235
-11	-211	-36	-236
-12	-212	-37	-237
-13	-213	-38	-238
-14	-214	-39	-239
-15	-215	-40	-240
-16	-216	-41	-241
-17	-217	-42	-242
-18	-218	-43	-243
-19	-219	-44	-244
-20	-220	-45	-245
-21	-221	-46	-246
-22	-222	-47	-247
-23	-223	-48	-248
-24	-224	-49	-249
-25	-225	-50	-250

REVIEWER: MI,MO,MU,WC,SH,WP,69,IS
USER: MC,YD,NSA

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 11 JAN 56 REVISED (A) FOR CHANGES SEE SHEET 1.

P.A.	WC
Other Coast	WP 69

TITLE: PIN, GROOVED, HEADLESS-LONGITUDINAL TAPER GROOVE, BRASS

MILITARY STANDARD
MS 35673

PROCUREMENT SPECIFICATION: MIL-P-20700
SUPERSEDES: AEGX2 in part
SHEET 2 OF

DD FORM 672-1 (Continued) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20260-23T17:26Z
Check the source to verify that this is the current version before use.