INCH-POUND

MS51502B
25 June 2015
SUPERSEDING
MS51502A
17 January 1979

DETAIL SPECIFICATION SHEET

NIPPLE TUBE, REGULAR HEX, 37 DEGREE FLARED, LONG

This specification is approved for use by all Departments and Agencies of the Department of Defense.

Inactive for new design after 17 August 1999. For new design, use SAE-J514.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-18866.

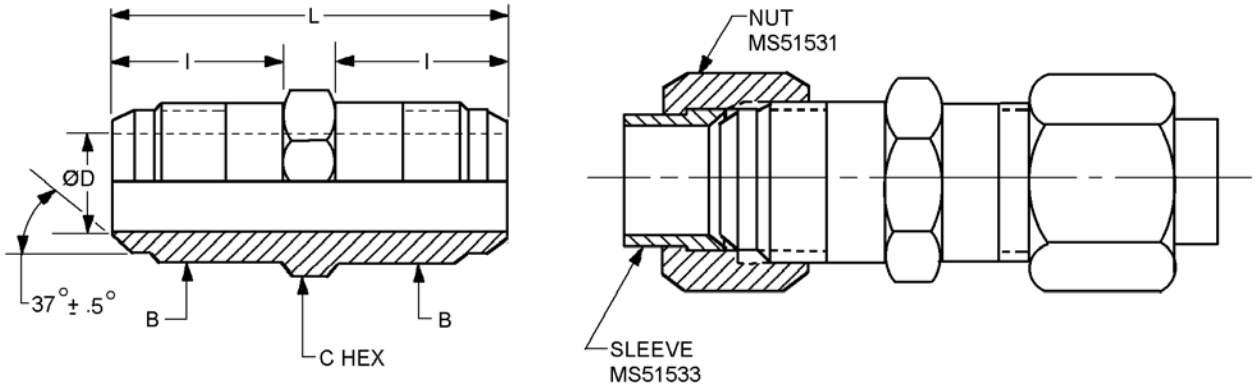


FIGURE 1. Nipple, tube, long.

AMSC N/A

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.

Suffix designator		Tube OD nom. inches (mm)	B Straight thread	C Hex flat nom.	D diameter	
Assembly (see note 4)	Body				Basic inches (mm)	Tolerance inches (mm)
A2	B2	.1250 (3.175)	.3125-24 UNF-2A	7/16	.062 (1.57)	±.003 (0.08)
A3	B3	.1875 (4.763)	.3750-24 UNF-2A	7/16	.125 (3.18)	
A4	B4	.2500 (6.350)	.4375-20 UNF-2A	1/2	.172 (4.37)	
A5	B5	.3125 (7.936)	.3125-24 UNF-2A	9/16	.234 (5.94)	
A6	B6	.3750 (9.525)	.5625-18 UNF-2A	5/8	.297 (7.54)	±.004 (0.10)
A8	B8	.5000 (12.700)	.7500-16 UNF-2A	13/16	.391 (9.93)	
A10	B10	.6250 (15.875)	.8750-14 UNF-2A	15/16	.484 (12.29)	
A12	B12	.7500 (19.050)	1.0625-12 UN-2A	1 1/8	.609 (15.47)	±.005 (0.13)
A14	B14	.8750 (22.225)	1.1875-12 UN-2A	1 1/4	.718 (18.24)	
A16	B16	1.0000 (25.400)	1.3125-12 UN-2A	1 3/8	.844 (21.44)	+.007 -.005 (+0.18 - 0.13)
A20	B20	1.2500 (31.750)	1.6250-12 UN-2A	1 11/16	1.078 (27.38)	+.008 -.005 (+0.20 -0.13)
A24	B24	1.5000 (38.100)	1.8750-12 UN-2A	2	1.312 (33.32)	
A32	B32	2.0000 (50.800)	2.500-12 UN-2A	2 5/8	1.781 (45.24)	+.010 -.005 (+0.25 -0.13)

Suffix designator		I max inches (mm)	L inches (mm) ±.050 (1.27)
Assembly (see note 4)	Body		
A2	B2	.640 (16.26)	1.500 (38.10)
A3	B3	.700 (17.78)	1.625 (41.28)
A4	B4	.770 (19.56)	1.750 (44.45)
A5	B5	.830 (21.08)	1.875 (47.63)
A6	B6	.920 (23.37)	2.094 (53.19)
A8	B8	1.110 (28.19)	2.469 (62.71)
A10	B10	1.280 (32.51)	2.875 (73.03)
A12	B12	1.450 (36.83)	3.281 (83.34)
A14	B14	1.531 (38.89)	3.453 (87.71)
A16	B16	1.610 (40.89)	3.594 (91.29)
A20	B20	1.844 (46.84)	4.094 (103.99)
A24	B24	2.109 (53.57)	4.625 (117.48)
A32	B32	2.844 (72.24)	6.094 (154.79)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Break all sharp edges and remove all burrs and slivers.
4. Assemblies are only furnished to this specification (body, nut, and sleeve). Bodies are not to be stocked stored or issued.
5. Dimensions and tolerances not shown shall be in accordance with SAE-J514 for 37 degree flared fittings.
6. The drawing is for identification purposes only and is not intended to restrict designs and shapes not dimensioned.

FIGURE 1. Nipple, tube, long - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Fittings shall be as specified on figure 1 and in tables I and II.

Components of the assemblies shall be of the same material and finish.

Materials shall be in accordance with MIL-DTL-18866 and table I.

TABLE I. Materials.

Material	Form	Specification	Alloy
Carbon steel	Bar	SAE-J403	1110, 1120, 1140, 1213, 1215, or 12L14
	Forgings		
Chrome-molybdenum steel	Bars	SAE-AMS6370	4130
	Forgings	SAE-AMS6382	
		SAE-AMS6370	
Corrosion resistant steel	Bars and forgings	ASTM A276/A276M	304, 304L, 316, or 321
		ASTM A564/A564M	XM-12 (15-5 PH) UNS S15500 or 603 (17-4 PH) UNS S17400
		SAE-AMS5639	UNS S30400
		SAE-AMS5645	UNS S32100
		SAE-AMS5647	UNS S30403
		SAE-AMS5743	UNS S35500
	Bar	ASTM A582/A582M	UNS S30300
Nickel-copper alloy	Bar	ASTM B164 QQ-N-281	UNS N04400
High-chromium nickel alloy	Bar	ASTM B166	UNS N06690
	Forgings	ASTM B564	
Titanium 1/	Bars	SAE-AMS4928	6AI-4V annealed
	Forgings		

1/ Titanium shall not be used in oxygen or potable water systems.

Finish. Finishes shall be as specified in table II. All platings shall be capable of meeting a minimum of 96 hours salt spray test in accordance with ASTM B117. The fittings shall show no evidence of corrosion after 96 hours of salt spray. Fluid passages, other openings and internal threads shall not be subject to the plating thickness requirement and may have bare areas provided they are protected with a light film of oil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.

TABLE II. Material and finish identification codes.

PIN code material/plating finish	Material	Plating Finish
Blank	Steel	Cadmium plating in accordance with SAE-AMS-C-81562, type II, class 3 or SAE-AMS-QQ-P-416, type II, class 2. 1/
CN		Cadmium plating in accordance with SAE-AMS-C-81562, type II, class 3 or SAE-AMS-QQ-P-416, type II, class 2 with NAVAIR trivalent chromium pretreatment (TCP) in accordance with MIL-DTL-81706, type II, class 1A.
E		NAVAIR TCP in accordance with MIL-DTL-81706, type II, class 1A.
F	Steel	Zinc plate (finish J, P, or R) with NAVAIR TCP in accordance with MIL-DTL-81706, type II, class 1A.
H	Steel	Aluminum-nickel in accordance with ASTM F1136/F1136M, grade 3, NC.
J	Steel	Zinc-nickel in accordance with SAE-AMS2417, type 2, grade B.
M	Nickel-copper alloy UNS N04400	No additional finish.
N	High-chromium nickel alloy UNS N06690	No additional finish.
P	Steel	Zinc phosphate finish in accordance MIL-DTL-16232 type Z, class1.
R	Steel	Zinc plating in accordance with ASTM B633; type VI, Fe/Zn 5. 2/
S	Corrosion resistant steel	No additional finish. Passivation in accordance with SAE-AMS2700, method 1, type 6 or 7.
T	Titanium	Anodize in accordance with SAE-AMS2488 type 2. 3/
TF	Titanium	Fluoride phosphate in accordance with SAE-AMS2486. 3/
Z	Steel	Zinc plating in accordance with ASTM B633; type II or III, Fe/Zn 5, or ASTM B695, type II, class 5. 4/
ZN	Steel	Zinc plating in accordance with ASTM B633; type II or III, Fe/Zn 5, or ASTM B695, type II, class 5 with NAVAIR TCP in accordance with MIL-DTL-81706, type II, class 1A. 4/

1/ Embrittlement test need not be run. Cadmium shall not be used in oxygen or potable water systems.
2/ Hexavalent chromium free.
3/ A pretreatment, a modification of the fluoride treatment, or a post treatment shall be applied so the final color of the fittings shall be similar to FED-STD-595 colors 36076 through 36293.
4/ Not for use in aircraft.


Trivalent wrenchability. When the finish has been damaged due to poor wrenchability, the surface of the connector shall be touched up using the brush plating process below. The term “trivalent wrenchability” is used to evaluate the ability of the finish to withstand abrasion from an excessive amount of wrenching

a. Brush plating of hard chromium by electrodeposition shall be in accordance with SAE-AMS-2451/5.
b. Brush plating of medium-hardness, low stress nickel by electrodeposition shall be in accordance with SAE-AMS-2451/9.
c. Brush plating of NAVAIR TCP shall be in accordance with MIL-DTL-81706, type II, class 1A, material form 1 through 6, application method B. Example of a PIN: M817062A6B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.

Maximum operating pressure. Maximum operating pressure shall be in accordance with SAE-J514.

PIN: The PIN consists of the letters “MS”, the specification number, a letter and number for nipple size, and a letter for material/finish designator.

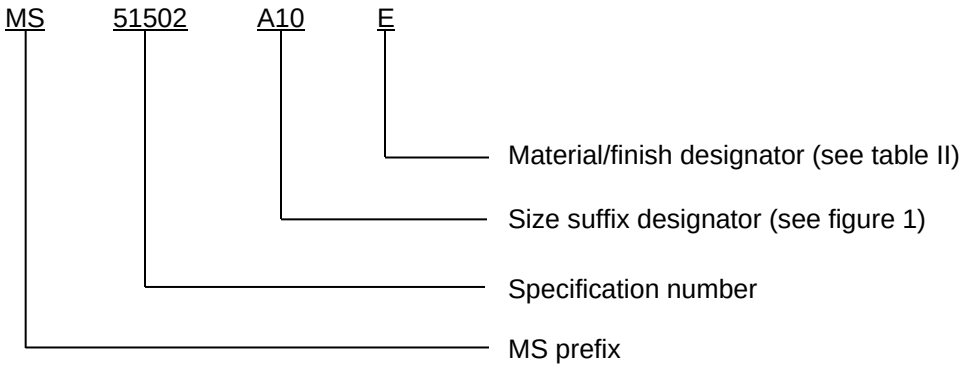

PIN example: MS51502A10E indicates a tube nipple, .6250 inch (15.875 mm), steel with NAVAIR TCP.

Cadmium is not recommended. To the users of this document, it is recommended that the use of carbon steel material with cadmium plating be used only when other materials and finishes specified in this document cannot meet performance requirements.

Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Referenced documents shall be of the issue in effect on date of invitations for bid.

Table III provides a detailed cross-reference of inactive MS51502 PIN’s and for new design SAE-J514 PIN’s.

MS51502 parts have threads in accordance with ASME B1.1 the SAE parts have straight threads in accordance with SAE-J425.

Users are cautioned to evaluate replacement parts for their particular application.

CAUTION: The superseding information is valid as of the date of this specification and may be superseded by subsequent revisions of the superseding document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.

TABLE III. MS51502 to SAE-J514 cross reference.

Inactive for new design MS51502- PIN		Tube OD	For new design SAE-J514 PIN	
Assembly	Body		Assembly	Body
MS51502A2	MS51502B2	1/8	Not available	Not available
MS51502A2CN	MS51502B2CN	1/8	Not available	Not available
MS51502A2E	MS51502B2E	1/8	Not available	Not available
MS51502A2F	MS51502B2F	1/8	Not available	Not available
MS51502A2H	MS51502B2H	1/8	Not available	Not available
MS51502A2J	MS51502B2J	1/8	Not available	Not available
MS51502A2M	MS51502B2M	1/8	J514-2-2-071720MA	J514-2-2-071720MB
MS51502A2N	MS51502B2N	1/8	J514-2-2-071720NA	J514-2-2-071720NB
MS51502A2P	MS51502B2P	1/8	J514-2-2-071720PA	J514-2-2-071720PB
MS51502A2R	MS51502B2R	1/8	Not available	Not available
MS51502A2S	MS51502B2S	1/8	J514-2-2-071720SA	J514-2-2-071720SB
MS51502A2T	MS51502B2T	1/8	J514-2-2-071720TA	J514-2-2-071720TB
MS51502A2TF	MS51502B2TF	1/8	Not available	Not available
MS51502A2Z	MS51502B2Z	1/8	J514-2-2-71720ZA	J514-2-2-071720ZB
MS51502A2ZN	MS51502B2ZN	1/8	Not available	Not available
MS51502A3	MS51502B3	3/16	Not available	Not available
MS51502A2CN	MS51502B3CN	3/16	Not available	Not available
MS51502A2E	MS51502B3E	3/16	Not available	Not available
MS51502A2F	MS51502B3F	3/16	Not available	Not available
MS51502A2H	MS51502B3H	3/16	Not available	Not available
MS51502A2J	MS51502B3J	3/16	Not available	Not available
MS51502A3M	MS51502B3M	3/16	J514-3-3-071720MA	J514-3-3-071720MB
MS51502A3N	MS51502B3N	3/16	J514-3-3-071720NA	J514-3-3-071720NB
MS51502A3P	MS51502B3P	3/16	J514-3-3-071720PA	J514-3-3-071720PB
MS51502A2R	MS51502B3R	3/16	Not available	Not available
MS51502A3S	MS51502B3S	3/16	J514-3-3-071720SA	J514-3-3-071720SB
MS51502A3T	MS51502B3T	3/16	J514-3-3-071720TA	J514-3-3-071720TB
MS51502A3TF	MS51502B3TF	3/16	Not available	Not available
MS51502A3Z	MS51502B3Z	3/16	J514-3-3-071720ZA	J514-3-3-071720ZB
MS51502A3ZN	MS51502B3ZN	3/16	Not available	Not available
MS51502A4	MS51502B4	1/4	Not available	Not available
MS51502A4CN	MS51502B4CN	1/4	Not available	Not available
MS51502A4E	MS51502B4E	1/4	Not available	Not available
MS51502A4F	MS51502B4F	1/4	Not available	Not available
MS51502A4H	MS51502B4H	1/4	Not available	Not available
MS51502A4J	MS51502B4J	1/4	Not available	Not available
MS51502A4M	MS51502B4M	1/4	J514-4-4-071720MA	J514-4-4-071720MB
MS51502A4N	MS51502B4N	1/4	J514-4-4-071720NA	J514-4-4-071720NB
MS51502A4P	MS51502B4P	1/4	J514-4-4-071720PA	J514-4-4-071720PB
MS51502A4R	MS51502B4R	1/4	Not available	Not available
MS51502A4S	MS51502B4S	1/4	J514-4-4-071720SA	J514-4-4-071720SB
MS51502A4T	MS51502B4T	1/4	J514-4-4-071720TA	J514-4-4-071720TB
MS51502A4TF	MS51502B4TF	1/4	Not available	Not available
MS51502A4Z	MS51502B4Z	1/4	J514-4-4-071720ZA	J514-4-4-071720ZB
MS51502A4ZN	MS51502B4ZN	1/4	Not available	Not available

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.

TABLE III. MS51502 to SAE-J514 cross reference.

Inactive for new design MS51502- PIN		Tube OD	For new design SAE-J514 PIN	
Assembly	Body		Assembly	Body
MS51502A5	MS51502B5	5/16	Not available	Not available
MS51502A5CN	MS51502B5CN	5/16	Not available	Not available
MS51502A5E	MS51502B5E	5/16	Not available	Not available
MS51502A5F	MS51502B5F	5/16	Not available	Not available
MS51502A5H	MS51502B5H	5/16	Not available	Not available
MS51502A5J	MS51502B5J	5/16	Not available	Not available
MS51502A5M	MS51502B5M	5/16	J514-5-5-071720ZA	J514-5-5-071720ZB
MS51502A5N	MS51502B5N	5/16	J514-5-5-071720PA	J514-5-5-071720PB
MS51502A5P	MS51502B5P	5/16	J514-5-5-071720SA	J514-5-5-071720SB
MS51502A5T	MS51502B5T	5/16	J514-5-5-071720TA	J514-5-5-071720TB
MS51502A5TF	MS51502B5TF	5/16	Not available	Not available
MS51502A5Z	MS51502B5Z	5/16	J514-5-5-071720ZA	J514-5-5-071720ZB
MS51502A5N	MS51502B5ZN	5/16	Not available	Not available
MS51502A6	MS51502B6	3/8	Not available	Not available
MS51502A6CN	MS51502B6CN	3/8	Not available	Not available
MS51502A6E	MS51502B6E	3/8	Not available	Not available
MS51502A6F	MS51502B6F	3/8	Not available	Not available
MS51502A6H	MS51502B6H	3/8	Not available	Not available
MS51502A6J	MS51502B6J	3/8	Not available	Not available
MS51502A6M	MS51502B6M	3/8	J514-6-6-071720MA	J514-6-6-071720MB
MS51502A6N	MS51502B6N	3/8	J514-6-6-071720NA	J514-6-6-071720NB
MS51502A6P	MS51502B6P	3/8	J514-6-6-071720PA	J514-6-6-071720PB
MS51502A6R	MS51502B6R	3/8	Not available	Not available
MS51502A6S	MS51502B6S	3/8	J514-6-6-071720SA	J514-6-6-071720SB
MS51502A6T	MS51502B6T	3/8	J514-6-6-071720TA	J514-6-6-071720TB
MS51502A6TF	MS51502B6TF	3/8	Not available	Not available
MS51502A6Z	MS51502B6Z	3/8	J514-6-6-071720ZA	J514-6-6-071720ZB
MS51502A6ZN	MS51502B6ZN	3/8	Not available	Not available
MS51502A8	MS51502B8	1/2	Not available	Not available
MS51502A8CN	MS51502B8CN	1/2	Not available	Not available
MS51502A8E	MS51502B8E	1/2	Not available	Not available
MS51502A8F	MS51502B8F	1/2	Not available	Not available
MS51502A8H	MS51502B8H	1/2	Not available	Not available
MS51502A8J	MS51502B8J	1/2	Not available	Not available
MS51502A8M	MS51502B8M	1/2	J514-8-8-071720MA	J514-8-8-071720MB
MS51502A8N	MS51502B8N	1/2	J514-8-8-071720NA	J514-8-8-071720NB
MS51502A8P	MS51502B8P	1/2	J514-8-8-071720PA	J514-8-8-071720PB
MS51502A8R	MS51502B8R	1/2	Not available	Not available
MS51502A8S	MS51502B8S	1/2	J514-8-8-071720SA	J514-8-8-071720SB
MS51502A8T	MS51502B8T	1/2	J514-8-8-071720TA	J514-8-8-071720TB
MS51502A8TF	MS51502B8TF	1/2	Not available	Not available
MS51502A8Z	MS51502B8Z	1/2	J514-8-8-071720ZA	J514-8-8-071720ZB
MS51502A8ZN	MS51502B8ZN	1/2	Not available	Not available

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.

TABLE III. MS51502 to SAE-J514 cross reference - Continued.

Inactive for new design MS51502- PIN		Tube OD	For new design SAE-J514 PIN	
Assembly	Body		Assembly	Body
MS51502A10	MS51502B10	5/8	Not available	Not available
MS51502A10CN	MS51502B10CN	5/8	Not available	Not available
MS51502A10E	MS51502B10E	5/8	Not available	Not available
MS51502A10F	MS51502B10F	5/8	Not available	Not available
MS51502A10H	MS51502B10H	5/8	Not available	Not available
MS51502A10J	MS51502B10J	5/8	Not available	Not available
MS51502A10M	MS51502B10M	5/8	J514-10-10-071720MA	J514-10-10 071720MB
MS51502A10N	MS51502B10N	5/8	J514-10-10-071720NA	J514-10-10 071720NB
MS51502A10P	MS51502B10P	5/8	J514-10-10-071720PA	J514-10-10 071720PB
MS51502A10R	MS51502B10R	5/8	Not available	Not available
MS51502A10S	MS51502B10S	5/8	J514-10-10-071720SA	J514-10-10 071720SB
MS51502A10T	MS51502B10T	5/8	J514-10-10-071720TA	J514-10-10 071720TB
MS51502A10TF	MS51502B10TF	5/8	Not available	Not available
MS51502A10Z	MS51502B10Z	5/8	J514-10-10-071720ZA	J514-10-10 071720ZB
MS51502A10ZN	MS51502B10ZN	5/8	Not available	Not available
MS51502A12	MS51502B12	3/4	Not available	Not available
MS51502A12CN	MS51502B12CN	3/4	Not available	Not available
MS51502A12E	MS51502B12E	3/4	Not available	Not available
MS51502A12F	MS51502B12F	3/4	Not available	Not available
MS51502A12H	MS51502B12H	3/4	Not available	Not available
MS51502A12J	MS51502B12J	3/4	Not available	Not available
MS51502A12M	MS51502B12M	3/4	J514-12-12-071720MA	J514-12-12 071720MB
MS51502A12N	MS51502B12N	3/4	J514-12-12-071720NA	J514-12-12 071720NB
MS51502A12P	MS51502B12P	3/4	J514-12-12-071720PA	J514-12-12 071720PB
MS51502A12R	MS51502B12R	3/4	Not available	Not available
MS51502A12S	MS51502B12S	3/4	J514-12-12-071720SA	J514-12-12 071720SB
MS51502A12T	MS51502B12T	3/4	J514-12-12-071720TA	J514-12-12 071720TB
MS51502A12TF	MS51502B12TF	3/4	Not available	Not available
MS51502A12Z	MS51502B12Z	3/4	J514-12-12-071720ZA	J514-12-12-071720ZB
MS51502A12ZN	MS51502B12ZN	3/4	Not available	Not available
MS51502A14	MS51502B14	7/8	Not available	Not available
MS51502A14CN	MS51502B14CN	7/8	Not available	Not available
MS51502A14E	MS51502B14E	7/8	Not available	Not available
MS51502A14F	MS51502B14F	7/8	Not available	Not available
MS51502A14H	MS51502B14H	7/8	Not available	Not available
MS51502A14J	MS51502B14J	7/8	Not available	Not available
MS51502A14M	MS51502B14M	7/8	J514-14-14-071720MA	J514-14-14-071720MB
MS51502A14N	MS51502B14N	7/8	J514-14-14-071720NA	J514-14-14-071720NB
MS51502A14P	MS51502B14P	7/8	J514-14-14-071720PA	J514-14-14-071720PB
MS51502A14R	MS51502B14R	7/8	Not available	Not available
MS51502A14S	MS51502B14S	7/8	J514-14-14-071720SA	J514-14-14-071720SB
MS51502A14T	MS51502B14T	7/8	J514-14-14-071720TA	J514-14-14-071720TB
MS51502A14TF	MS51502B14TF	7/8	Not available	Not available
MS51502A14Z	MS51502B14Z	7/8	J514-14-14-071720ZA	J514-14-14-071720ZB
MS51502A14ZN	MS51502B14ZN	7/8	Not available	Not available

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.

TABLE III. MS51502 to SAE-J514 cross reference - Continued.

Inactive for new design MS51502- PIN		Tube OD	For new design SAE-J514 PIN	
Assembly	Body		Assembly	Body
MS51502A16	MS51502B16	1	Not available	Not available
MS51502A16CN	MS51502B16CN	1	Not available	Not available
MS51502A16E	MS51502B16E	1	Not available	Not available
MS51502A16F	MS51502B16F	1	Not available	Not available
MS51502A16H	MS51502B16H	1	Not available	Not available
MS51502A16J	MS51502B16J	1	Not available	Not available
MS51502A16M	MS51502B16M	1	J514-16-16-071720MA	J514-16-16-071720MB
MS51502A16N	MS51502B16N	1	J514-16-16-071720NA	J514-16-16-071720NB
MS51502A16P	MS51502B16P	1	J514-16-16-071720PA	J514-16-16-071720PB
MS51502A16R	MS51502B16R	1	Not available	Not available
MS51502A16S	MS51502B16S	1	J514-16-16-071720SA	J514-16-16-071720SB
MS51502A16T	MS51502B16T	1	J514-16-16-071720TA	J514-16-16-071720TB
MS51502A16TF	MS51502B16TF	1	Not available	Not available
MS51502A16Z	MS51502B16Z	1	J514-16-16-071720ZA	J514-16-16-071720ZB
MS51502A16ZN	MS51502B16ZN	1	Not available	Not available
MS51502A20	MS51502B20	1 1/4	Not available	Not available
MS51502A20CN	MS51502B20CN	1 1/4	Not available	Not available
MS51502A20E	MS51502B20E	1 1/4	Not available	Not available
MS51502A20F	MS51502B20F	1 1/4	Not available	Not available
MS51502A20H	MS51502B20H	1 1/4	Not available	Not available
MS51502A20J	MS51502B20J	1 1/4	Not available	Not available
MS51502A20M	MS51502B20M	1 1/4	J514-20-20-071720MA	J514-20-20-071720MB
MS51502A20N	MS51502B20N	1 1/4	J514-20-20-071720NA	J514-20-20-071720NB
MS51502A20P	MS51502B20P	1 1/4	J514-20-20-071720PA	J514-20-20-071720PB
MS51502A20R	MS51502B20R	1 1/4	Not available	Not available
MS51502A20S	MS51502B20S	1 1/4	J514-20-20-071720SA	J514-20-20-071720SB
MS51502A20T	MS51502B20T	1 1/4	J514-20-20-071720TA	J514-20-20-071720TB
MS51502A20TF	MS51502B20TF	1 1/4	Not available	Not available
MS51502A20Z	MS51502B20Z	1 1/4	J514-20-20-071720ZA	J514-20-20-071720ZB
MS51502A20ZN	MS51502B20ZN	1 1/4	Not available	Not available
MS51502A24	MS51502B24	1 1/2	Not available	Not available
MS51502A24CN	MS51502B24CN	1 1/2	Not available	Not available
MS51502A24E	MS51502B24E	1 1/2	Not available	Not available
MS51502A24F	MS51502B24F	1 1/2	Not available	Not available
MS51502A24H	MS51502B24H	1 1/2	Not available	Not available
MS51502A24J	MS51502B24J	1 1/2	Not available	Not available
MS51502A24M	MS51502B24M	1 1/2	J514-24-24-071720MA	J514-24-24-071720MB
MS51502A24N	MS51502B24N	1 1/2	J514-24-24-071720NA	J514-24-24-071720MB
MS51502A24P	MS51502B24P	1 1/2	J514-24-24-071720PA	J514-24-24-071720PB
MS51502A24R	MS51502B24R	1 1/2	Not available	Not available
MS51502A24S	MS51502B24S	1 1/2	J514-24-24-071720SA	J514-24-24-071720SB
MS51502A24T	MS51502B24T	1 1/2	J514-24-24-071720TA	J514-24-24-071720TB
MS51502A24TF	MS51502B24TF	1 1/2	Not available	Not available
MS51502A24Z	MS51502B24Z	1 1/2	J514-24-24-071720ZA	J514-24-24-071720ZB
MS51502A24ZN	MS51502B24ZN	1 1/2	Not available	Not available

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.

TABLE III. MS51502 to SAE-J514 cross reference - Continued.

Inactive for new design MS51502- PIN		Tube OD	For new design SAE-J514 PIN	
Assembly	Body		Assembly	Body
MS51502A32	MS51502B32	2	Not available	Not available
MS51502A32CN	MS51502B32CN	2	Not available	Not available
MS51502A32E	MS51502B32E	2	Not available	Not available
MS51502A32F	MS51502B32F	2	Not available	Not available
MS51502A32H	MS51502B32H	2	Not available	Not available
MS51502A32J	MS51502B32J	2	Not available	Not available
MS51502A32M	MS51502B32M	2	J514-32-32-071720MA	J514-32-32-071720MB
MS51502A32N	MS51502B32N	2	J514-32-32-071720NA	J514-32-32-071720NB
MS51502A32P	MS51502B32P	2	J514-32-32-071720PA	J514-32-32-071720PB
MS51502A32R	MS51502B32R	2	Not available	Not available
MS51502A32S	MS51502B32S	2	J514-32-32-071720SA	J514-32-32-071720SB
MS51502A32T	MS51502B32T	2	J514-32-32-071720TA	J514-32-32-071720TB
MS51502A32TF	MS51502B32TF	2	Not available	Not available
MS51502A32Z	MS51502B32Z	2	J514-32-32-071720ZA	J514-32-32-071720ZB
MS51502A32ZN	MS51502B32ZN	2	Not available	Not available

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-18866, this document references the following:

FED-STD-595/36076	FED-STD-595/36280	ASTM B164	SAE-AMS2488
FED-STD-595/36081	FED-STD-595/36293	ASTM B166	SAE-AMS2700
FED-STD-595/36099	MIL-DTL-16232	ASTM B564	SAE-AMS4928
FED-STD-595/36118	MIL-DTL-81706	ASTM B633	SAE-AMS5639
FED-STD-595/36134	MS51531	ASTM B695	SAE-AMS5645
FED-STD-595/36152	MS51533	ASTM F1136/F1136M	SAE-AMS5647
FED-STD-595/36170	QQ-N-281	SAE-AMS-C-81562	SAE-AMS5743
FED-STD-595/36173	ASME B1.1	SAE-AMS-QQ-P-416	SAE-AMS6370
FED-STD-595/36176	ASTM A276/A276M	SAE-AMS2417	SAE-AMS6382
FED-STD-595/36231	ASTM A564/A564M	SAE-AMS2451/5	SAE-J403
FED-STD-595/36251	ASTM A582/A582M	SAE-AMS2451/9	SAE-J425
FED-STD-595/36270	ASTM B117	SAE-AMS2486	SAE-J514

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - AT
Navy - SH
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2015-044)

Review activities:
Army - AR
Navy - CG, MC, SA
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:03Z
Check the source to verify that this is the current version before use.