
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

FED. SUP. CLASS 4720


CONFIGURATION AND MATERIAL
CORROSION RESISTANT MATERIAL (4540P)

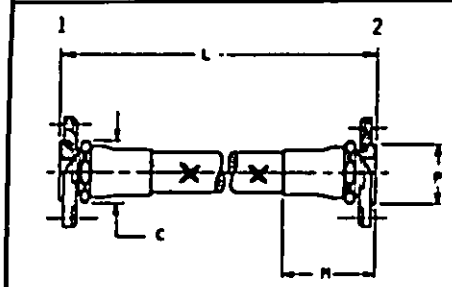

STYLE "A"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"C" MAX.	"M" MAX.	"P" MAX.
STRAIGHT	STRAIGHT	-8C	.880	1.560	.875
		-10C	.967	1.570	1.000
		-12C	1.122	1.640	1.250
		-16C	1.480	1.750	1.500
		-20C	1.750	1.990	1.844
		-24C	2.150	2.260	2.125


User Activities: Army - Navy - Air Force - DLA -

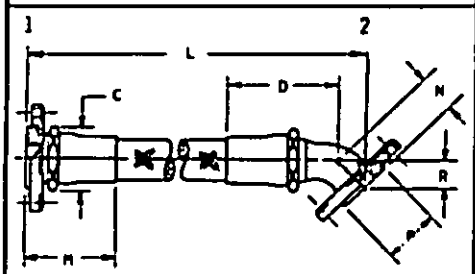

STYLE "B"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"C" MAX.	"D" MAX.	"N" MAX.	"M" MAX.	"P" MAX.	"R" MIN.	"R" MAX.
STRAIGHT	45 DEG.	-8C	.880	1.722	1.560	.606	.875	.303	.420
		-10C	.967	2.037	1.570	.658	1.000	.348	.465
		-12C	1.122	2.360	1.640	.789	1.250	.433	.550
		-16C	1.480	2.583	1.750	.929	1.500	.478	.637
		-20C	1.750	2.946	1.990	1.020	1.844	.534	.721
		-24C	2.150	3.210	2.260	1.186	2.125	.589	.839

Review Activities: Army - Navy - Air Force - DLA - CS

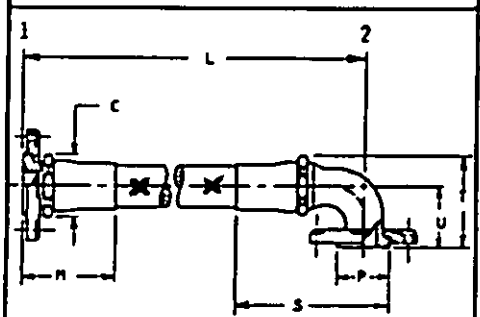

STYLE "C"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"C" MAX.	"N" MAX.	"P" MAX.	"S" MAX.	"T" MAX.	"U" MIN.	"U" MAX.
STRAIGHT	90 DEG.	-8C	.880	1.560	.875	2.320	1.422	.857	.982
		-10C	.967	1.570	1.000	2.875	1.499	.841	1.025
		-12C	1.122	1.640	1.250	3.686	1.887	1.032	1.266
		-16C	1.480	1.750	1.500	3.981	2.174	1.156	1.434
		-20C	1.750	1.990	1.844	4.435	2.550	1.344	1.715
		-24C	2.150	2.260	2.125	5.075	3.103	1.516	2.029

APPROVED 16 AUG 71 REVISED Ⓐ 15 DEC 76 Ⓑ 30 June 1985

Ⓐ LIFTIME STANDARD REVISED

P.A. AIR FORCE-11	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust ARMY - AV NAVY - AS		HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLANGE TO FLANGE	MS 8009
PROCUREMENT SPECIFICATION MIL-H-25579	SUPERSEDES		SHEET 1 of 4 FSC 4720

DD FORM 672


Project No. 4720-B540

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

CONFIGURATION AND MATERIAL
CORROSION RESISTANT MATERIAL (4540F)

FED. SUP. CLASS 4720


User Activities: Army - Navy - Air Force - DLA -

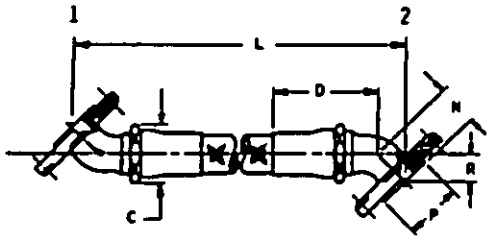

STYLE "D"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"C" MAX.	"D" MAX.	"N" MAX.	"P" MAX.	"R" MIN.	"R" MAX.
45 DEG.	45 DEG.							
		-8C	.688	1.722	.686	.875	.383	.428
		-10C	.967	2.037	.658	1.088	.348	.465
		-12C	1.122	2.368	.789	1.250	.433	.558
		-16C	1.488	2.583	.929	1.588	.470	.657
		-20C	1.750	2.946	1.020	1.844	.534	.721
		-24C	2.150	3.210	1.186	2.125	.589	.839


Review Activities: Army - Navy - Air Force - DLA - CS

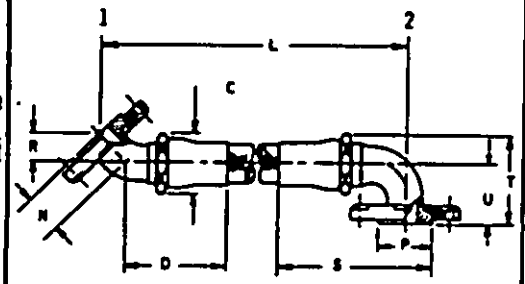

STYLE "E"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"C" MAX.	"D" MAX.	"N" MAX.	"P" MAX.	"R" MIN.	"R" MAX.
45 DEG.	90 DEG.							
		-8C	.688	1.722	.686	.875	.383	.428
		-10C	.967	2.037	.658	1.088	.348	.465
		-12C	1.122	2.368	.789	1.250	.433	.558
		-16C	1.488	2.583	.929	1.588	.470	.657
		-20C	1.750	2.946	1.020	1.844	.534	.721
		-24C	2.150	3.210	1.186	2.125	.589	.839

HOSE SIZE	"S" MAX.	"T" MAX.	"U" MIN.	"U" MAX.
-8C	2.328	1.422	.657	.982
-10C	2.675	1.499	.861	1.015
-12C	3.686	1.887	1.032	1.246
-16C	3.981	2.174	1.156	1.436
-20C	4.435	2.590	1.344	1.715
-24C	5.075	3.183	1.516	2.020

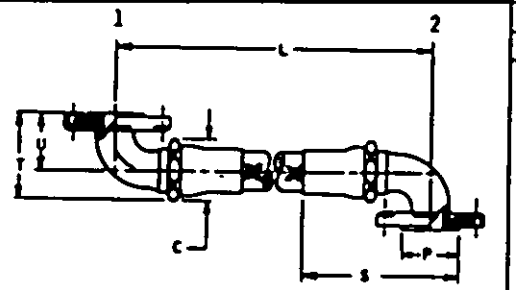

STYLE "F"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"C" MAX.	"P" MAX.	"S" MAX.	"T" MAX.	"U" MIN.	"U" MAX.
90 DEG.	90 DEG.							
		-8C	.688	.875	2.328	1.422	.657	.982
		-10C	.967	1.088	2.675	1.499	.861	1.015
		-12C	1.122	1.250	3.686	1.887	1.032	1.246
		-16C	1.488	1.588	3.981	2.174	1.156	1.436
		-20C	1.750	1.844	4.435	2.590	1.344	1.715
		-24C	2.150	2.125	5.075	3.183	1.516	2.020

APPROVED 16 AUG 71 REVISED A 15 DEC 76 B 30 June 1985

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE: HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLANGE TO FLANGE	MILITARY STANDARD MS 8009
PROCUREMENT SPECIFICATION MIL-H-25579	SUPERSEDES:		SHEET 2 of 6 FSC 4720


DD FORM 672

Project No. 4720-0548

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.


CONFIGURATION AND MATERIAL
COMBINATION ALUMINUM AND
CORROSION RESISTANT STEEL (2750P)

FED. SUP. CLASS
4720

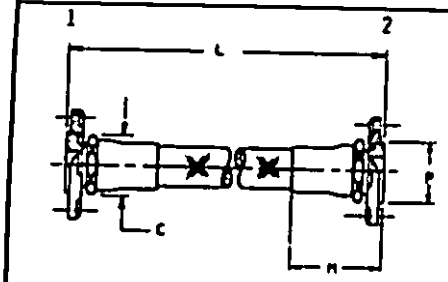


STYLE "G"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"C" MAX.	"M" MAX.	"P" MAX.				
STRAIGHT	STRAIGHT	-8	.888	1.560	.875				
		-10	.967	1.570	1.000				
		-12	1.122	1.640	1.250				
		-16	1.488	1.750	1.500				
		-20	1.750	1.990	1.844				
		-24	2.150	2.260	2.125				

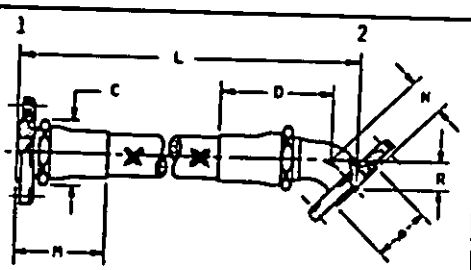

STYLE "H"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"C" MAX.	"D" MAX.	"M" MAX.	"N" MAX.	"P" MAX.	"R" MIN.	"R" MAX.
STRAIGHT	45 DEG.	-8	.888	1.722	1.560	.686	.875	.303	.420
		-10	.967	2.037	1.579	.650	1.000	.348	.465
		-12	1.122	2.360	1.648	.789	1.250	.433	.550
		-16	1.488	2.583	1.750	.929	1.500	.478	.657
		-20	1.750	2.946	1.990	1.028	1.844	.536	.721
		-24	2.150	3.210	2.260	1.186	2.125	.589	.839

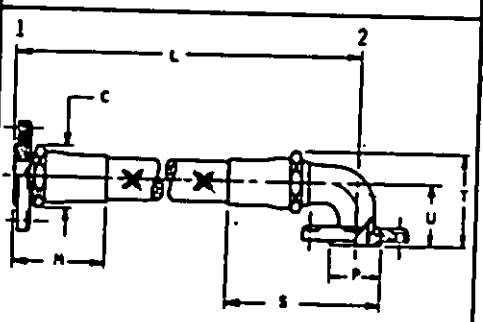

STYLE "J"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"C" MAX.	"M" MAX.	"P" MAX.	"S" MAX.	"T" MAX.	"U" MIN.	"U" MAX.
STRAIGHT	90 DEG.	-8	.888	1.560	.875	2.320	1.422	.857	.982
		-10	.967	1.570	1.000	2.875	1.499	.861	1.015
		-12	1.122	1.640	1.250	3.606	1.807	1.032	1.246
		-16	1.488	1.750	1.500	3.981	2.174	1.136	1.434
		-20	1.750	1.990	1.844	4.435	2.590	1.344	1.715
		-24	2.150	2.260	2.125	5.075	3.103	1.516	2.028

Army -
Navy -
Air Force -
DLA -

User Activities:

Army -
Navy -
Air Force - CR
DLA - CR

Review Activities:

APPROVED 16 AUG 71 REVISED (A) 15 DEC 76 (B) 30 June 1983

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. AIR FORCE-11	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust ARMY - AV NAVY - AS		HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLANGE TO FLANGE	MS 8009
PROCUREMENT SPECIFICATION MIL-H-25579	SUPERSEDES		SHEET 3 of 6 FSC 4720


DD FORM 672

Project No. 4720-0548

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.


CONFIGURATION AND MATERIAL
COMBINATION ALUMINUM AND
CORROSION RESISTANT STEEL (275°F)

FED. SUP. CLASS
4720

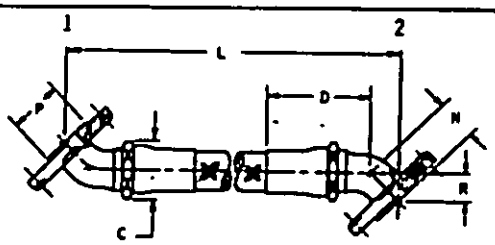

STYLE "K"


FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"C" MAX.	"D" MAX.	"N" MAX.	"P" MAX.	"R" MIN.	"R" MAX.
45 DEG.	45 DEG.							
		-8	.880	1.722	.686	.875	.383	.428
		-10	.967	2.037	.658	1.000	.360	.465
		-12	1.122	2.368	.709	1.250	.433	.558
		-16	1.488	2.583	.929	1.500	.478	.657
		-20	1.750	2.946	1.028	1.844	.536	.721
		-24	2.156	3.218	1.186	2.125	.589	.839

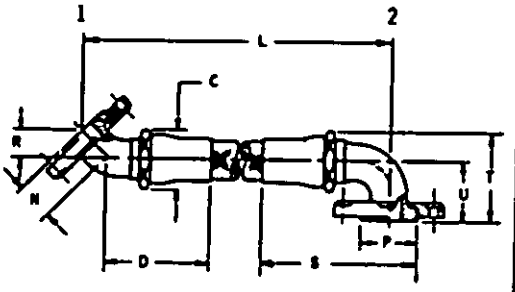

STYLE "M"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"C" MAX.	"D" MAX.	"N" MAX.	"P" MAX.	"R" MIN.	"R" MAX.
45 DEG.	90 DEG.							
		-8	.880	1.722	.686	.875	.383	.428
		-10	.967	2.037	.658	1.000	.360	.465
		-12	1.122	2.368	.709	1.250	.433	.558
		-16	1.488	2.583	.929	1.500	.478	.657
		-20	1.750	2.946	1.028	1.844	.536	.721
		-24	2.156	3.218	1.186	2.125	.589	.839

HOSE SIZE	"S" MAX.	"T" MAX.	"U" MIN.	"U" MAX.
-8	2.329	1.422	.857	.982
-10	2.875	1.499	.861	1.015
-12	3.606	1.887	1.032	1.266
-16	3.981	2.174	1.136	1.434
-20	4.435	2.598	1.344	1.715
-24	5.075	3.183	1.516	2.028

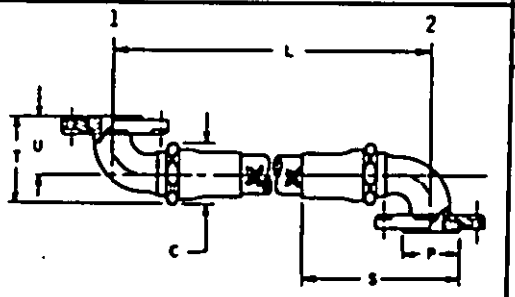

STYLE "N"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"C" MAX.	"P" MAX.	"S" MAX.	"T" MAX.	"U" MIN.	"U" MAX.
90 DEG.	90 DEG.							
		-8	.880	.875	2.329	1.422	.857	.982
		-10	.967	1.000	2.875	1.499	.861	1.015
		-12	1.122	1.250	3.606	1.887	1.032	1.266
		-16	1.488	1.500	3.981	2.174	1.136	1.434
		-20	1.750	1.844	4.435	2.598	1.344	1.715
		-24	2.156	2.125	5.075	3.183	1.516	2.028

User Activities: Army - Navy - Air Force - DLA -

Review Activities: Army - Navy - Air Force - DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

APPROVED 16 AUG 71 REVISED A 15 DEC 76 B 30 June 1983

P.A. AIR FORCE-11	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust ARMY - AV NAVY - AS		HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLANGE TO FLANGE	MS 8009
PROCUREMENT SPECIFICATION MIL-H-25579	SUPERSEDES		SHEET 4 of 6 FSC 4720

DD Form 672


Project No. 4720-0548

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

NOTES:

1. CONFIGURATION:

HOSE SIZE IN HOSE ASSEMBLIES IS DESIGNATED BY LETTER INSTEAD OF NUMBER. SEE TABLE BELOW FOR DOUBLE ELBOW HOSE ASSEMBLIES. ANGULAR ORIENTATION BETWEEN THE ELBOWS IS EXPRESSED IN THREE DIGITS. THE ANGLE IS MEASURED IN DEGREES COUNTERCLOCKWISE FROM THE CENTERLINE OF THE NEAREST FITTING WHEN THIS FITTING IS POSITIONED AT 6 O'CLOCK TO THE CENTERLINE OF THE OTHER FITTING AS SHOWN IN THE FIGURE. IF THE DESIRED ORIENTATION IS ZERO DEGREES, SPECIFY AS 000.



LETTER DESIGNATION FOR HOSE SIZE DASH NUMBERS

HOSE ASSEMBLY SIZE	-8	-10	-12	-16	-20	-24
LETTER DESIGNATION	H	J	K	L	M	P

2. E MAX, J MAX, M MAX AND T MAX ARE INSTALLATION DIMENSIONS AND NOT DESIGN DIMENSIONS.

3. STYLES E, H, M, P, R, S, T, U, AND V HAVE COMBINATION CRES AND ALUMINUM FITTINGS.

4. FOR "IDENTIFICATION OF PRODUCT", SEE PROCUREMENT SPECIFICATION.

THE SWIVEL NUT AND NIPPLE END SHALL MATE WITH AS33514 FITTINGS. THE SWIVEL NUT THREADS SHALL CONFORM TO MIL-S-8879.

LENGTH "L" TO BE MEASURED BETWEEN CENTER OF NIPPLE END AND CENTER OF FLANGE SEALING SURFACE ALONG A STRAIGHT LINE PARALLEL TO HOSE LENGTH WITH HOSE LAID OUT HORIZONTALLY AND STRAIGHT.

HOSE IN ACCORDANCE WITH MIL-H-27267.

HOSE ASSEMBLY TO BE SPECIFIED IN INCHES AND IN THE FOLLOWING LENGTH INCREMENTS ONLY:

UNDER 12 INCHES LONG, NOT LESS THAN 1/8 INCH. TOLERANCE ± 1/8.
12 TO 18 INCHES LONG, NOT LESS THAN 1/4 INCH. TOLERANCE ± 1/8.
OVER 18 INCHES LONG, NOT LESS THAN 1/2 INCH.
TOLERANCE FOR LENGTHS FROM 18 TO 36 INCHES ± 1/4.
TOLERANCE FOR LENGTHS FROM 36 TO 58 INCHES ± 1/2.
TOLERANCE FOR LENGTHS OVER 58 INCHES ± 1%.

5. THE PART NUMBER SHALL BE FORMULATED TO REFLECT THE HOSE ASSEMBLY TUBE O.D., LENGTH, STYLE AND ANGLE BETWEEN ELBOWS, AS APPLICABLE.

EXAMPLES OF PART NUMBER:

MS8009H16F*030

- H — SIZE H = -8 OR 1/2 INCH TUBE O.D.
- 16 — LENGTH IN INCHES (FOR LENGTHS UNDER 10 INCHES, USE 09, 08, 07, ETC.)
- F — LENGTH IN EIGHTS (1/8) OF AN INCH
- * — CODE LETTER SEE BELOW
- 030 — STYLE AND MATERIAL OF FITTING ASSEMBLY (SEE SHEETS 1 THRU 4)
- ANGLE BETWEEN ELBOWS IN DEGREES (NOT REQUIRED FOR STYLES A, B, C, G, H, AND J)

HOSE ASSEMBLY FOR 1/2 INCH TUBE O.D., 16 INCHES IN LENGTH, 30° BETWEEN ELBOWS.

MS8009J09028*

- J — SIZE J = -10 OR 5/8 INCH TUBE O.D.
- 09 — LENGTH IN INCHES
- 28 — LENGTH IN EIGHTS (1/8) OF AN INCH
- 028 — STYLE OF MATERIAL OF FITTING ASSEMBLY (SEE SHEETS 1 THRU 4)
- * — CODE LETTER SEE BELOW

HOSE ASSEMBLY FOR 5/8 INCH TUBE O.D., 9-1/4 INCHES IN LENGTH

* ADD CODE LETTER AS FOLLOWS FOR ADDITIONAL FEATURES (IF REQUIRED)

APPROVED 16 AUG 71 REVISED (A) 15 DEC 76 (B) 30 June 1985 *

User Activities: Army - Navy - Air Force - DLA -

Review Activities: Army - Navy - Air Force - DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. AIR FORCE-11	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust ARMY - AV NAVY - AS		HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLANGE TO FLANGE	MS 8009
PROCUREMENT SPECIFICATION MIL-H-25579	SUPERSEDES:		SHEET 5 of 6 FSC 4720

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

"A" AS1072 SLEEVE, FIRE PROTECTION, SILICONE COVERED, -65°F (-54°C) THRU +500°F (+260°C) SECURED WITH CRES BANDS AS REQUIRED.
"B" AS1073 - CODE B SLEEVE, ABRASION PROTECTION, HEAT SHRINKABLE, BLACK POLYOLEFIN, -65°F (-54°C) THRU +250°F (+121°C).
"C" AS1291 - CODE A SLEEVE, CHAFE GUARD, EXTRUDED SEAMLESS WHITE TFE, -65°F (-54°C) THRU +450°F (+232°C) SECURED WITH CRES BANDS AS REQUIRED.
"D" AS1291 - CODE CCSLEEVE, CHAFE GUARD, EXTRUDED SEAMLESS TRANSPARENT FEP, -65°F (-54°C) THRU +350°F (+177°C) SECURED WITH CRES BANDS AS REQUIRED.
"E" AS1290 SLEEVE, HEAVY WALL CHAFE GUARD, EXTRUDED SEAMLESS BLACK TFE -65°F (-54°C) THRU +450°F (+232°C) SECURED WITH CRES BANDS AS REQUIRED.
"F" LOCKWIRE HOLE
"G" CODE A + L
"H" CODE B + L
"J" CODE C + L
"K" CODE D + L
"L" CODE E + L

6. A TRUE CIRCULAR CROSS SECTION IS NOT REQUIRED WITHIN THE ANGLE OF THE BEND OF THE END FITTING ELBOW. HOWEVER, OVALITY SHALL NOT EXCEED 7-1/2 PERCENT OF THE NOMINAL TUBING O.D. DIMENSIONS FOR THE BALL WHICH MUST PASS THROUGH THE ENTIRE LENGTH OF THE ELBOW ARE LISTED BELOW FOR THE VARIOUS SIZES AS INDICATED.

HOSE SIZE TUBE	-8	-10	-12	-16	-20	-24
BALL SIZE IN INCHES	.313	.391	.515	.750	.969	1.188

7. DIMENSIONS IN INCHES.

8. THE CUT ENDS OF THE FIRE PROTECTION SLEEVE (CODE A) SHALL BE COATED WITH RTV SILICONE RUBBER, PRIOR TO INSTALLATION TO PREVENT WICKING OF FLUIDS. AFTER INSTALLATION, CRACKS OR VOIDS IN THE FIRE PROTECTION SLEEVE, WHICH EXPOSE ASBESTOS/FIBERGLASS, SHALL BE COATED WITH RTV RUBBER.

FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

APPROVED 16 AUG 71 REVISED (A) 15 DEC 76 (B) 30 June 1983

User Activities: Army - Navy - Air Force - DLA -

Review Activities: Army - Navy - Air Force - DLA - CD

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. AIR FORCE-11	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust ARMY - AV NAVY - AS		HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLANGE TO FLANGE	MS 8009
PROCUREMENT SPECIFICATION MIL-H-25579	SUPERSEDES		SHEET 6 of 6 FSC 4720

DD FORM 672-1 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Project No. 4720-0548

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.