MILITARY SPECIFICATION SHEET

ELECTRON TUBE, MICROWAVE, NEGATIVE GRID

TYPE 5767

The complete requirements for procuring the electron tube described herein shall consist of this document and the latest issue of Specification MIL-E-1.

DESCRIPTION: Triode, planar

See figure 1

Mounting position: Any

Weight: 0.4 ounce

ABSOLUTE RATINGS: UHF oscillator CW

Parameter:	Ef	Eb	Ib	Ec	Pp	tk	T(seal)	Rk
Unit:	V	Vdc	mAdc	Vdc	W	sec	°C	Ohms
Maximum:	7.0	350	25	---	5.0	---	175	---
Minimum:	5.7	---	---	---	---	---	---	---
TEST CONDITIONS:	6.3	180	12.0	0	---	300	---	400

GENERAL:

Qualification - Required (see note 1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:14Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	CONDITIONS	AQL (PERCENT DEFECTIVE)	INSPECTION LEVEL OR CODE	SYMBOL	LIMITS MIN	LIMITS MAX	UNIT
	Quality conformance inspection, part 1							
1301	Heater current		0.65	II	If	380	420	mA
1256	Electrode current (1) (anode)		0.65	II	Ib	8.0	16.0	mAdc
1256	Electrode current (2) (anode)	Ec = -28 Vdc; Rk = 0	0.65	II	Ib	---	10.0	μAdc
1306	Transconductance	See note 4	0.65	II	Sm	3,350	5,650	μmhos
1231	Emission	(Eb = Ec)/Ik = 30 mAdc; Rk = 0 (see note 5)	0.65	II	Etd	---	10	Vdc
1236	Power oscillation (1)	Ef = 5.7 V; Eb = 150 Vdc; Rg = 100 ohms; Rk/Ib = 25 mA (max); Rk = 25 to 250 ohms; F = 1.2 GHz ± 25 MHz; test in cavity in accordance with Drawing No. 171-JAN, or equivalent	0.65	II	Po	150	---	mW (useful)
	Quality conformance inspection, part 2							
1236	Power oscillation (2)	Ef = 6.3 V; Eb = 150 Vdc; Rg = 100 ohms; Rk/Ib = 25 mA (max); Rk = 25 to 250 ohms; F = 1.2 GHz ± 25 MHz; test in cavity in accordance with Drawing No. 171-JAN, or equivalent	6.5	S3	Po	150	---	mW (useful)
1031	Vibration	No voltages	6.5	S3	---	---	---	---
1266	Total grid current		6.5	S3	Ic	0	-1.0	μAdc
1211	Insulation of electrodes	Ef = 6.3 V; Eg to all = 100 Vdc	6.5	S3	R	25	---	Meg
1316	Amplification factor	See note 4	6.5	S3	Mu	15	35	---
1331	Direct-interelectrode capacitance	Test in cavity in accordance with Drawing No. 170-JAN, or equivalent	6.5	S3	Cgp Cgk Cpk	1.25 1.15 ---	1.65 1.50 0.025	pF pF pF
---	Torque	Applied between anode and cathode without shock (see note 2)	6.5	S3	---	10	---	lb-in.
---	Seal	T = 175°C (min); t = 16 hours (min) (see note 3)	6.5	S3	---	---	---	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:14Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	CONDITIONS	AQL (PERCENT DEFECTIVE)	INSPECTION LEVEL OR CODE	SYMBOL	LIMITS		UNIT
						MIN	MAX	
	Quality conformance inspection, part 3							
---	Life-test provisions	Group C; power oscillation (2); t = 500 hours	---	---	---	---	---	---
---	Life-test end point	Power oscillation (2)	---	---	Po	65	---	mW (useful)

NOTES:


1. The activity responsible for the qualified products list is the Naval Electronic Systems Command, Department of the Navy, Washington, DC 20360, and information pertaining to qualification of products may be obtained from that activity. Application for Qualification tests shall be made in accordance with "Provisions Governing Qualification". (Copies of "Provisions Governing Qualification" may be obtained upon application to Commanding Officer, Naval Supply Depot, 5801 Tabor Avenue, Philadelphia, Pa. 19120.)
2. After subjection to the torque specified, the tube shall be tested for total grid current and the value shall not exceed -1.2 μAdc.
3. This test shall consist of subjecting the tube to the temperature and minimum time specified, after which the tube shall be tested for heater current and the value shall be within 380 to 420 mA.
4. The reactance of the bypass condenser shall not exceed 3 ohms.
5. May be made at constant voltage as an alternate with Eb = Ec = 10 Vdc; Rk = 0; Is = 35 mAdc (min).

User activities:
Navy - AS, OS, MC, CG, SH

Preparing activity:
Navy - EC

(Project 5960-N768)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:14Z
Check the source to verify that this is the current version before use.

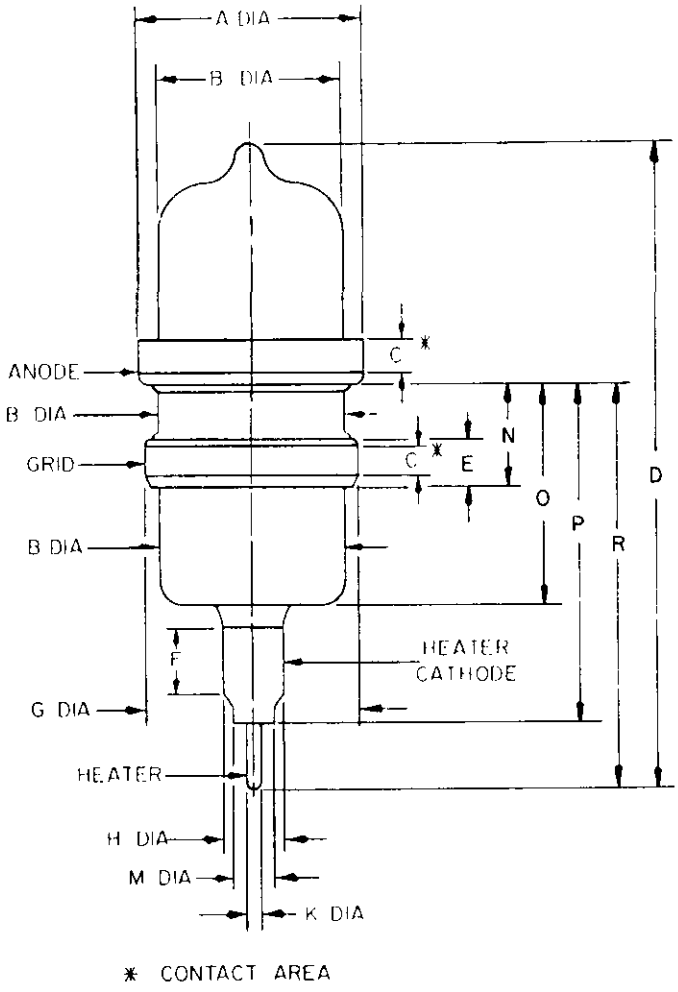

Dim	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
Quality conformance inspection, part 2		
A	.804 (20.42)	.814 (20.68)
B		.660 (16.76)
C	.090 (2.29)	
D		2.390 (60.71)
E	.175 (4.45)	.195 (4.95)
F	.250 (6.35)	
G	.740 (18.80)	.750 (19.05)
H	.197 (5.00)	.207 (5.26)
K	.045 (1.14)	.055 (1.40)
M		.190 (4.83)
N	.345 (8.76)	.395 (10.03)
O		.815 (20.71)
P	1.150 (29.21)	1.200 (30.48)
R	1.375 (34.93)	1.445 (36.70)

FIGURE 1. Outline drawing of electron tube type 5767.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969-341-517/A-4991

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:14Z
Check the source to verify that this is the current version before use.