MIL-E-1/1640B
29 January 1976
SUPERSEDING
MIL-E-1/1640A
26 September 1969
(See note 31)

MILITARY SPECIFICATION SHEET

ELECTRON TUBE, MAGNETRON

TYPE 8855

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the electron tube described herein shall consist of this document and the latest issue of Specification MIL-E-1.

DESCRIPTION: Coaxial, tunable frequency 8,500 to 9,600 MHz, pulse type, integral magnet, 200-kw rated peak power output

ABSOLUTE RATINGS:

Parameter:	Ef	if(surge)	tk	tpc	rrv	Du	epy	ib
Unit:	V	a	sec	μs	kv/μs	---	kv	a
Maximum:	15	12	---	2.8	160	0.0011	24	30
Minimum:	---	---	150	0.2 (Note 3)	90 (Note 4)	---	---	15

ABSOLUTE RATINGS:

Parameter:	Pi	pi	T(body)	Tuner stop torque	Alt	Pressurization Input	Pressurization Output
Unit:	W	kw	°C	in.-oz	ft	psia	psia
Maximum:	680	680	160	60	---	45	45
Minimum:	---	---	-55 (Note 7)	---	6,000	12	12

PHYSICAL CHARACTERISTICS:

Dimensions:	See figure 1	Marking:	See note 25
Mounting position:	Any	Cooling:	Forced air (see note 7)
Mounting support:	See figure 1	Handling:	See note 5
Input coupling:	See note 20	Weight:	13 pounds (approx)
Output coupling:	See note 20		

TEST CONDITION (1): See note 21

Parameter:	Ef	tpc	rrv	Du	Ib	T(Body)	F
Unit:	V	μs	kv/μs	---	mAdc	°C	MHz
Maximum:	---	0.30	---	---	---	100	---
	0	---	---	0.001	27.5	---	F1, F2, F3
Minimum:	---	0.20	160	---	---	80	---
	(Note 2)						

Frequency
F1 = 8,500 MHz
F2 = 9,000 MHz
F3 = 9,600 MHz

TEST CONDITION (2): See note 21

Parameter:	Ef	tpc	rrv	Du	Ib	T (Body)	F
Unit:	V	μs	kv/μs	---	mAdc	°C	MHz
Maximum:	---	2.60	---	---	---	100	---
	0	---	---	0.001	27.5	---	F1, F2, F3
Minimum:	---	2.10	160	---	---	80	---
	(Note 2)						

GENERAL:

Qualifications - Required

Ⓑ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:11Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	NOTES	TEST	CONDITIONS	SYMBOL	LIMITS		UNIT
						MINIMUM	MAXIMUM	
Ⓑ	Qualification inspection							
4027	Temperature coefficient	e	2	T(body) = 70° to 150°C; F = F2	ΔF/ΔT	---	0.25	MHz/°C
1042	Shock	30	-	Condition K; no voltages applied	---	---	---	---
4266	Direct-interelectrode capacitance	-	-	Cathode terminal to mounting plate	C	9	14	pF
1047	Low-temperature operation	13,14	2	F2	MP	---	0.5	%
	Quality conformance inspection, part 1	1	-					
4289	Heater current, nonoperating	-	-	Ef = 13.75 V	If	2.9	3.3	A
4223	Mechanical tuning range	-	1	Upper limit Lower limit	F F	9,600 ---	--- 8,500	MHz MHz
4003	Pressurizing	18, 19	-	40 to 45 psia input and output assemblies	---	---	---	---
4306	Pulse voltage	-	2		epy	20	23	kv
4250	Power output	22 -	1 2		Po Po	200 200	270 270	W W
4308	RF bandwidth	17	1, 2		BW	---	2.0/tpc	MHz
4306	Minor lobe ratio	17 17	1 2		Ratio Ratio	10 8	--- ---	dB dB
4315	Stability	14	1, 2		MP	---	0.25	%
4315	Starting stability	23	2	F2	MP	---	0.25	%
---	Frequency variations	24	2		F	---	0.1	MHz
	Quality conformance inspection, part 2							
4223	Operating torque or force	-	-	25° ± 5°C	Torque	---	45	in. -oz
4223	Resettability	-	2	F3 ± 50 MHz	ΔF	---	10	MHz
1143	Forced cooling	7, 8, e	2		ΔT	---	90	°C
4311	Frequency pushing figure	16	2	ib = 15 to 27a	ΔF/Δa	---	0.1	MHz/a
4310	Frequency pulling figure	27	2	ib = 27.5a	ΔF	---	5	MHz

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:11Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	NOTES	TEST	CONDITIONS	SYMBOL	LIMITS		UNIT
						MINIMUM	MAXIMUM	
	Quality conformance inspection, part 3							
---	Life test	29	-	Group D or S; VSWR = 1.5 (min), cycled through λ_g every 15 minutes (approx)	---	1,500 1,250	--- ---	Cycles Hours
---	Life-test end points:							
4250	Power output	-	2	Upper limit	Po	160	---	W
4223	Mechanical tuning range	-	1	Lower limit	F F	9,600 ---	--- 8,500	MHz MHz
4308	RF bandwidth	17	1, 2		BW	---	2.5/tpc	MHz
4308	Minor lobe ratio	-	1, 2		---	6	---	dB
4315	Stability	14	1, 2		MP	---	0.5	%
---	Tuning characteristics	6, 28	2		F	---	15	MHz
4223	Operating torque or force	6	2	T(body) = -55°C and 150°C (max)	---	---	60	in. -oz
4223	Mechanical tuning range	6	2	T(body) = -55°C and 150°C (max) Upper limit Lower limit	 F F	 9,600 ---	 --- 8,500	 MHz MHz
---	Variable - frequency vibration (1) (operating)	6, 10	2	ib = 27.5a; F3	---	---	---	---
---	Frequency variations	6, 24	2	F2	ΔF	---	1.0	MHz
4315	Stability	6, 11	2	F2	MP	---	0.5	%
---	Variable-frequency vibration (2) (operating)	6, 9, 26	2	ib = 27.5a; F3	---	---	---	---
---	Fixed-frequency vibration (operating)	6, 26	2	ib = 27.5a; F3; F = 50; 10G; t = 60 seconds; 3 planes	---	---	---	---
4302	Frequency change (warmup)	6, 15	2	F3	ΔF	---	18	MHz
---	Tuning characteristics	6, 28	2		F	---	15	MHz
4223	Mechanical tuning fatique	6, 12	-	No voltages applied	---	500	---	Cycles

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:11Z
Check the source to verify that this is the current version before use.

NOTES:

1. Unless otherwise specified, the AQL for all tests listed under quality conformance inspection, part 1, shall be 1.0, inspection level II.

2. Prior to the application of high voltage, the cathode shall be heated to the required initial operating temperature. This shall be done by applying 13.75 volts ± 5 percent for 150 seconds maximum. Upon the application of anode voltage, the heater voltage shall be reduced according to the following schedule:

Du	Ib (mAdc)	Ef(V) ± 5 percent
Standby - - - - -	---	13.75
Operate 0.001	27.5	0

For Pi equal to or greater than 450 watts, Ef = 0

For Pi less than 450 watts, $Ef = 13.75 \left(1 - \frac{Pi}{450}\right)$ ± 10 percent

3. The characteristics of the applied pulse shall be those which result in proper starting and oscillation. The rate of rise of the voltage pulse, the percentage of pulse voltage ripple, and the rate of pulse voltage fall are among the more important considerations. (See method 4304.)

4. The rate of rise of voltage (rrv) shall be measured in accordance with method 4304, except that the steepest tangent to the leading edge of the voltage pulse shall be measured above the 70 percent amplitude point.

5. In handling and mounting the magnetron, care shall be exercised to prevent demagnetization. (See figure 1.)

6. This test shall be performed during the initial production and once each succeeding 12-calendar months in which there is production. A regular double sampling plan shall be used, with the first sample of three tubes with an acceptance number of zero, and a second sample of three tubes with a combined acceptance number of one. In the event of failure, the test will be made as a part of quality conformance inspection, part 2, code level D, with an AQL of 6.5. The regular "12-calendar month" double sampling plan shall be reinstated after three consecutive samples have been accepted.

7. With a total airflow of approximately 40 cfm at approximately 760 mmHg, divided equally and directed through the cooling fins toward the body of the tube from two 3/4-inch (19.05 mm) ducts placed 1/2 to 3/4 inch (12.7 to 19.05 mm) from the cooling fins, the rise above ambient temperature specified herein shall not be exceeded.

8. The frequency shall be the frequency of minimum power output between F1 and F3.

9. The TUT shall be mounted in a resonance free jig and vibrated with sinusoidal excitation in each of three mutually perpendicular planes through the following amplitudes for both resonance and cycling tests: 50 to 500 Hz at 5G.

   Cycling test: The frequency shall increase from 50 to 500 Hz with approximately logarithmic progression, and shall require approximately 10 minutes to traverse the range. Frequency shall then decrease from 500 to 50 Hz in the same manner. This constitutes one cycle. The TUT shall be vibrated for three such cycles in each of the three planes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:11Z
Check the source to verify that this is the current version before use.

NOTES: Continued

Resonant test: Mechanical resonant frequencies of the magnetron shall be determined during the cycling test. The TUT shall then be vibrated at the indicated resonant conditions for a period of 30 minutes. If more than one resonant frequency is encountered, the test period may be accomplished at the most severe resonance, or the period may be divided among the resonant frequencies, whichever is most likely to produce failure.

10. The TUT shall be mounted in a resonance free jig and vibrated with sinusoidal excitation in each of three mutually perpendicular planes through the following amplitudes:

    15 to 30 Hz at 0.1 -inch angular displacement

    30 to 500 Hz at 2G

    The frequency shall increase from 15 to 500 Hz then decrease to 15 Hz with approximately logarithmic progression, and shall require approximately 15 minutes to traverse the range. Inter-pulse frequency stability and rf stability shall not exceed the limits specified herein.

11. A missing pulse is defined as one whose energy within ±1 percent frequency range of the normal operating frequency is 70 percent or less than that of a normal pulse. The tube shall be considered stable if the missing pulse limit specified is not exceeded during the vibration time and acceleration levels as specified in the operating vibration test.

12. The tuner shaft shall be continuously driven at a speed of 85 ± 10 rpm. At the completion of the test, the TUT shall meet test condition 1 requirements. The backlash shall not exceed 15 MHz. During the test, the tuning shaft shall not be lubricated. A cycle consists of two complete excursions each in opposite directions through the tuning range of the TUT. This is a destructive test. Life-test samples may be used.

13. The ambient temperature of the chamber shall be -55°C. The cooling air supplied to the TUT shall be at -55°C at 40 cfm maximum. The temperature of the TUT shall be allowed to stabilize at this ambient temperature for a minimum of 4 hours. At the conclusion of this exposure period and while at this temperature, heater voltage of 13.75 V shall be applied for a maximum of 150 seconds before application of anode voltage. The stability test shall be of 3-minute duration and to begin after 30 seconds of anode operation. The provisions of note 14, shall apply.

14. Stability shall be measured in terms of the average number of output pulses missing, expressed as a percentage of the number of input pulses applied during the period of observation. The missing pulses (MP) due to any causes, are considered to be missing if the rf energy is less than 70 percent of the normal energy level. The stability shall be measured when a VSWR of 1.5 minimum is introduced in the load at a distance of 1 ± 0.05 meters from the magnetron flange and the phase is adjusted to produce maximum instability. The missing pulse test shall be counted during any three consecutive minute interval of a 6-minute period.

15. Cooling air shall be applied so that under the conditions of test condition 2, T (body) measured at the point indicated on figure 1, shall fall between 80° and 100°C after the thermal equilibrium has been reached. The TUT may be operated and the airflow preset a minimum of 12 hours before the test. The TUT shall not have been operated for 12 hours prior to the performance of the frequency change (warmup) test. The test shall be performed in the following manner: Anode voltage, as specified for test condition 2, shall be applied after a maximum of 150-seconds heater warmup time. The frequency shall then be measured at approximately 3-minute intervals until frequency stabilization occurs. A graph of frequency versus time shall be constructed using the data. The frequency deviation from the stabilization frequency shall not exceed the limit specified herein.

Source: https://assist.dla.mil -- Downloaded: 202640-15T15:11Z
Check the source to verify that this is the currentversion before use.

NOTES: -Continued

16. The pushing factor shall be measured in three steps, 4 amperes each (15a to 19a, 19a to 23a, 23a to 27a) and no value shall exceed the limits specified herein. The peak current through the TUT shall alternately be the limits as specified under this test condition. These tests shall be run to exclude the effects of thermal drift and frequency instability not due to pushing.

17. The rf bandwidth and minor lobe ratio shall be within the limits specified herein when a VSWR of 1.5 minimum is introduced in the load at a distance of 1 ± 0.05 meters from the magnetron flange and the phase is adjusted at the start of each measurement to produce maximum degradation. A satisfactory spectrum is one whose slope does not change sign more than once for power levels greater than the specified dB below its peak.

18. The seal formed by clamping the magnetron mounting plate against a suitable magnetron test fixture shall be hermetically tight for 1 minute minimum with the air pressure specified herein applied to surround the entire input bushing below the mounting plate.

19. The seal formed by clamping the magnetron output flange against a suitable magnetron test fixture shall be hermetically tight for 1 minute minimum with the air pressure specified herein applied internally to test fixture.

20. The minimum air pressure to assure prevention of electrical breakdown in the output coupling shall be 15 psia for VSWR up to 1.5 with phase shift variable over 360 electrical degrees. The TUT shall be coupled directly to UG-51/U choke flange in accordance with MIL-F- 3922/53 modified so that mounting holes provide clearance for No. 8 bolts.

21. The modulator shall be such that the energy per pulse delivered to the tube, if arcing occurs, shall not greatly exceed the normal energy per pulse. The tube heater shall be protected against arcing by use of a connector that places a minimum of 4,000 pF across the heater directly at the input terminals.

22. The power output shall be continuous over the range from F1 to F3. At no frequency in this range shall the power output be less than the minimum value specified herein.

23. After the holding period, the anode voltage shall be applied 150 seconds minimum after the application of the standby heater voltage. The missing pulse count test interval of 3 minutes shall start immediately after the application of anode voltage. The provisions of note 14 shall apply.

24. For frequency variation measurements, the maximum peak-to-peak frequency deviation shall not exceed the amount specified herein. The test shall be run excluding thermal drift and pushing effects. The test equipment shall have a bandpass of 10 MHz minimum at the 3 dB points. Frequency variations are defined as inter-pulse frequency changes, commonly called clatter.

25. In addition to regular markings, the tuner dial settings for the following frequencies shall be marked on the tube during final testing by the manufacturer. The accuracy of these settings shall be ± 10 MHz at the start of life under conditions of test condition 2 with the body temperature approximately 80°C measured at the point specified on figure 1 when tuning is performed in the order of decreasing the frequency.

Frequency (MHz)	Dial setting	Frequency (MHz)	Dial setting
8,500	---	9,150	---
8,650	---	9,300	---
8,800	---	9,450	---
9,000	---	9,600	---

Source: https://assist.dla.mil -- Downloaded: 202640-15T15:11Z
Check the source to verify that this is the current version before use.

NOTES: -Continued

26. At the completion of this test, the TUT shall meet the power output and voltage requirements of test 2 of the quality conformance inspection, part 1, and the operating torque or force and resettability requirements of quality conformance inspection, part 2.

27. The frequency deviation (maximum frequency minus minimum frequency) shall not exceed the limits specified herein when a VSWR of 1.5 minimum, introduced into the load at a distance 1 ±0.05 meters from the magnetron flange, is varied throughout all phases.

28. At each of the dial settings and under the operating conditions specified in note 25, the measured frequency shall not differ from the stated frequency by more than the amount specified herein.

29. Starting at F1 and increasing to F3, then decreasing to F1, the frequency of the TUT will be changed in 150 MHz increments after each 50 hours (approximately) of high-voltage operation. The duration of the switching interval between test 1 and test 2 shall not exceed 5 seconds. The following cycle shall be used for the life test:

Condition	ib(A)	Ef(V)	Duration
Standby	0	13.75	2.5 minutes
Test 1	27.5	0	25.0
Test 2	27.5	0	25.0
Off	0	0	7.5

30. Following impact tests, the TUT shall show no mechanical failure and shall meet all power output and voltage requirements of test condition 2 and operating torque or force of quality conformance inspection, part 2.

31. Revision letters are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activity:
DSA - ES

User activities:
Army - WC
Navy - AS, OS, MC, CG
Air Force - 11

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5960-3011)

Source: https://assist.dla.mil -- Downloaded: 202610-15T15:11Z
Check the source to verify that this is the current version before use.



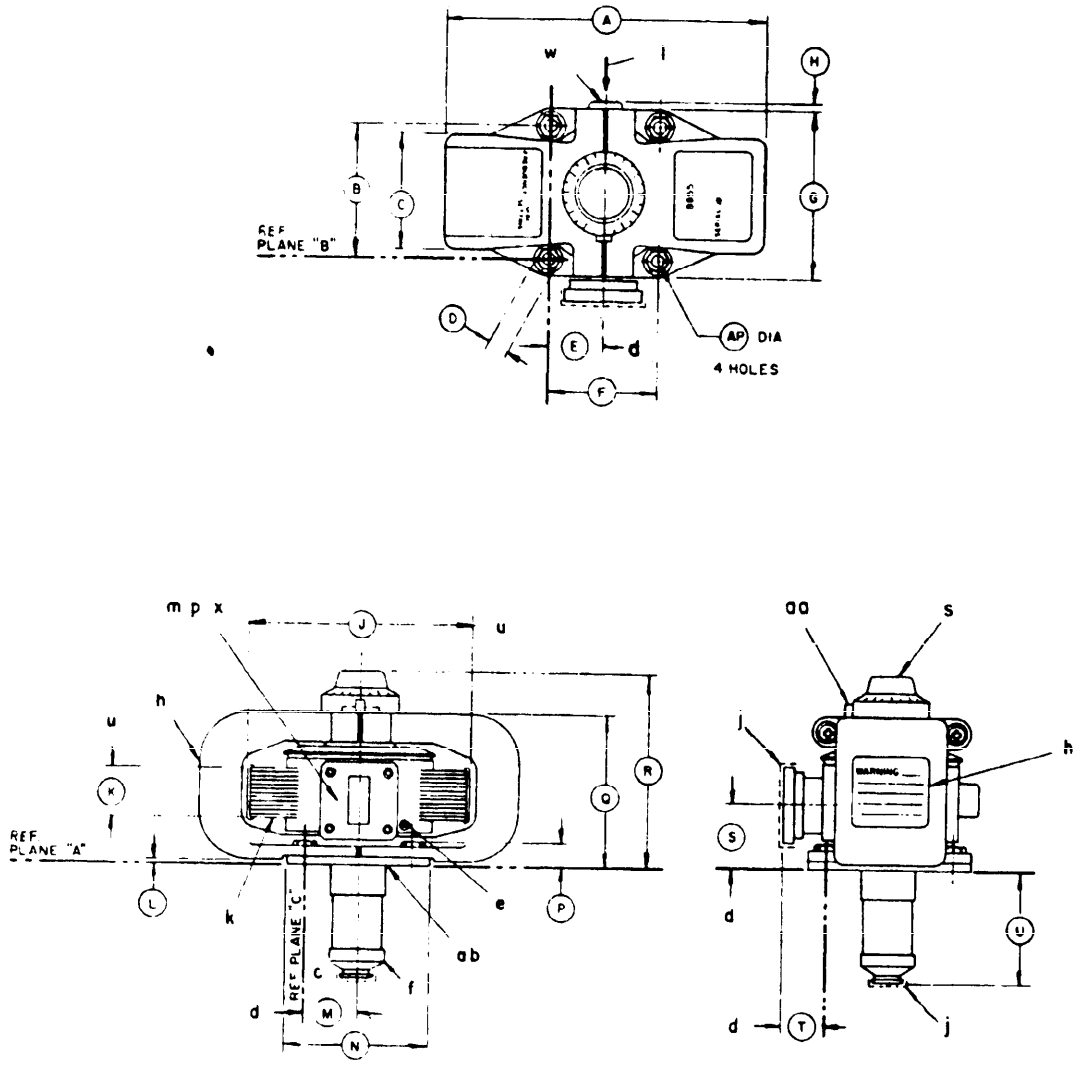


FIGURE 1. Outline drawing of electron tube type 8855.


Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:11Z
Check the source to verify that this is the current version before use.

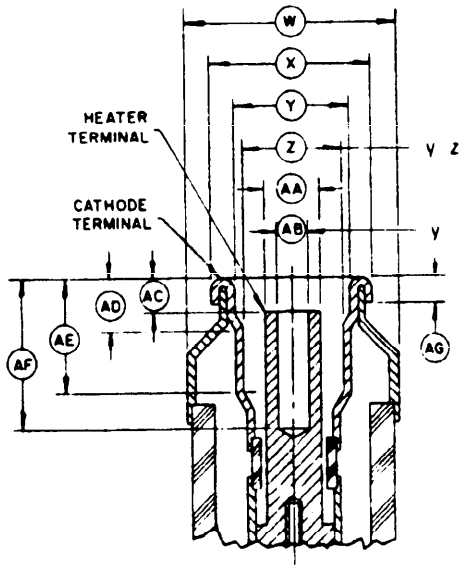

DETAIL OF INPUT CONNECTION

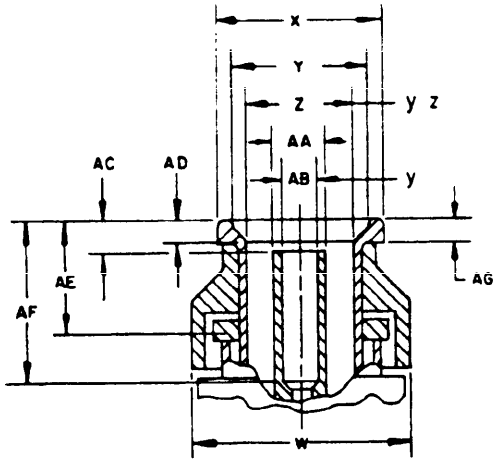

DETAIL OF ALTERNATE INPUT - CONNECTION

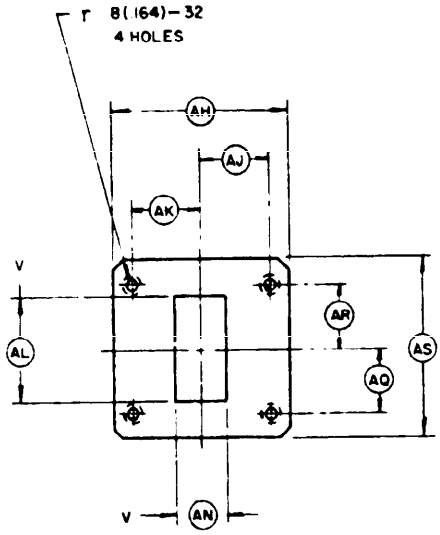

DETAIL OF OUTPUT FLANGE

FIGURE 1. Outline drawing of electron tube type 8855 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:11Z
Check the source to verify that this is the current version before use.

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
Quality conformance inspection, part 1		
B	2.990 (75.946)	3.010 (76.454)
E	1.204 (30.582)	1.296 (32.918)
F	2.490 (63.246)	2.510 (63.754)
M	1.204 (30.582)	1.296 (32.918)
S	1.610 (40.894)	1.702 (43.231)
T	.874 (22.200)	.938 (23.815)
U	2.562 (65.075)	2.749 (69.825)
X	.825 (20.96)	.838 (21.285)
Z	.532 (13.513)	.545 (13.843)
AA	.234 (5.944)	.266 (6.756)
AB	.164 (4.166)	.174 (4.420)
AC	.125 (3.175)	.187 (6.750)
AE	.562 (14.275)	
AF	.750 (19.050)	
AG	.115 (2.921)	.135 (3.429)
AJ	.732 (18.592)	.742 (18.850)
AK	.732 (18.592)	.742 (18.850)
Quality conformance inspection, part 2		
D	.470 (11.938)	.655 (16.64)
L	.031 (.787)	
W	1.062 (26.975)	1.125 (28.575)
AD		.156 (3.962)
AH	1.860 (47.244)	1.890 (48.006)
AS	1.860 (47.244)	1.890 (48.006)

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
Quality conformance inspection, part 3 (See note 6)		
A		7.687 (195.250)
C		2.750 (69.850)
Q		3.535 (89.789)
Y	.603 (15.316)	.617 (15.672)
AQ	.671 (17.043)	.681 (17.297)
AR	.671 (17.043)	.681 (17.297)
AP	.276 (7.010)	.286 (7.264)
Nominal dimensions (see note t)		
G	3.750 (95.250)	
H	.297 (7.544)	
J	5.400 (137.160)	
K	1.200 (30.480)	
N	3.406 (86.512)	
P	.581 (14.757)	
R	4.500 (114.300)	
AL	1.122 (28.498)	
AN	.497 (12.624)	

NOTES:
a. Reference plane 'A' is defined as a plane passing along the face of the mounting.
b. Reference plane 'B' is defined as a plane perpendicular to plane 'A' passing through the axis of the holes, as shown at reference plane 'A'.
c. Reference plane 'C' is defined as a plane mutually perpendicular to planes 'A' and 'B' passing through the axis of the holes, as shown at reference plane 'A'.
d. Includes angular as well as lateral deviations.
e. Body temperature shall be measured at this point. The TUT serviceability shall not be impaired with a screw inserted or removed from this threaded hole.
f. Input bushing temperature shall be measured at this point.
g. For vibration and shock testing, the planes of testing shall be reference planes 'A' - 'B' - 'C'.
h. WARNING: Maintain a minimum clearance of 4 inches between magnet and magnetic materials, (magnets, steel tools, plates, etc.).
j. Protective closure. Shall be removed before the TUT is used, and attached when the tube is not in use.
k. The inner laminations of the cooling fins shall not be painted. However, there may be an overspray of the protective paint.
l. Indicates direction of body cooling airflow.
m. Mates with modified waveguide RG-52/U in accordance with MIL-W-85/1. (Clearance instead of threaded holes).

FIGURE 1. Outline drawing of electron tube type 8855 - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:11Z
Check the source to verify that this is the current version before use.

NOTES: - Continued.

n. With the TUT mounted on the test fixture and with the specified air pressure applied so as to surround the entire input terminal beyond the TUT mounting plate, the entire TUT and fixture are to be submerged in water. No bubbles are allowed in a 1-minute interval.
p. With the TUT output flange clamped against a modified choke flange, UG-52B/U, in accordance with MIL-F-3922/59, and using a gasket, MS90064-14, and with the air pressure specified herein applied to the interior of the waveguide, submerge entire assembly in water. No bubbles will be permitted in a 1-minute interval.
r. A plane passing through the axis of two threaded holes perpendicular to the face of the output flange shall be parallel to planes 'A' and 'B' within .030.
s. The frequency increases as the tuner knob is driven in a counterclockwise direction.
t. Dimensions without tolerances are for information and are not required for inspection purposes.
u. This dimension refers to radiator fin size only.
v. Rectangular opening to be centered within .005 with respect to the axis of the four threaded holes.
w. Permanently attached protective closure for the exhaust tubulation of the TUT shall not restrict airflow nor impair serviceability of the TUT.
x. The face of the waveguide flange shall be flat within .010 total indicator reading. The surface of this flange shall be of such a quality that a hermetic type seal can be effected. See note p.
y. Heater terminal and cathode terminal shall be concentric within .010.
z. This diameter applies for length AE.
aa. Tuner dial lock.
ab. This identifies a North seeking pole. This may be tested by observing which compass needle points to the geographic South. The same compass needle will point toward the TUT North seeking pole when it is brought near the input stem of the TUT. Care should be taken to insure that the TUT field does not reverse the polarity of the compass.

FIGURE 1. Outline drawing of electron tube type 8855 - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-15T15:11Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-15T15:11Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

S/N-0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:11Z
Check the source to verify that this is the current version before use.