MILITARY SPECIFICATION SHEET

ELECTRON TUBE, RECEIVING

TYPE 6080WC

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the electron tube described herein shall consist of this specification sheet and the latest issue of MIL-E-1.

DESCRIPTION: Twin triode, low Mu

Outline --- See figure 1

Base --- B8-98 (glass-bonded mica)

Envelope --- T12

Cathode --- Coated unipotential

Base connections:

Pin no.	---	1	2	3	4	5	6	7	8
Element	---	2g	2a	2k	1g	1a	1k	h	h

ABSOLUTE-MAXIMUM RATINGS:

Parameter:	Ef	Eb	Ec	Ehk	Rk/k	Rg/g	Ic/g	Ik/k	Pp/p	TE	Alt
Unit:	V	Vdc	Vdc	v	Ohms	Meg	mAdc	mAdc	W	°C	ft
Maximum:	6.6	250	0	450	---	(See note 1)	5.0	200	13	300	(See note 2)
Minimum:	6.0	---	---	---	---	---	---	---	---	---	---
TEST CONDITIONS:	6.3	135	0	---	250	---	---	---	---	---	---

GENERAL:

Qualification - Required
Reliable tube

6080WC

FSC 5960

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:13Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	NOTES	CONDITIONS	AQL (PERCENT DEFECTIVE)	INSPECTION LEVEL OR CODE	SYMBOL	LIMITS MIN	LIMITS MAX	UNIT
	Qualification inspection								
1216	Base material insulating quality		glass-bonded mica, zone 5 minimum	---	---	---	---	---	---
1031	Variable-frequency vibration	4	Ec1 = -7 Vdc; Rk = 0; Rp = 2,000 ohms	---	---	Ep	---	500	mVac
	Quality conformance inspection, part 1								
1256	Electrode current (1) (anode)	6,7,8		0.4	II	Ib	100	150	mAdc
1266	Total grid current	4,8	Rg = 1.0 Meg; Rk = 125 ohms	0.4	II	Ic	0	-1.0	µAdc
1301	Heater current			0.4	II	If	2.35	2.65	A
1306	Transconductance (1)	6,7,9		0.4	II	Sm	6,000	8,200	µmhos
1336	Heater-cathode leakage	6	Ehk = +450 Vdc Ehk = -450 Vdc	0.4	II	Ihk	---	25	µAdc
1201	Short and discontinuity detection			0.4	II	---	---	---	---
	Quality conformance inspection, part 2								
1211	Insulation of electrodes	6		2.5	I	R	200	---	Meg
1256	Electrode current (2) (anode)	6,7	Eb = 250 Vdc; Ec = 200 Vdc	2.5	I	Ib	---	10	mAdc
1306	Transconductance (2)	6,7,9	Ef = 5.7 V	2.5	I	$\frac{\Delta Sm}{Ef}$	---	10	%
1316	Amplification factor	6,7,9	Rk = 250 ohms	---	---	Mu	1.5	2.5	---
1256	Electrode current (1) (anode) difference between sections			2.5	I	ΔIb	---	25	mAdc
1031	Sweep-frequency vibration	4,10	Rk = 0; Rp = 2,000 ohms; Ec = -7 Vdc; F = 50 to 500 Hz; 2.5 G	6.5	Code H	Ep	---	500	mVac
1101	Secureness of base, cap, or insert			---	---	---	---	---	---
1111	Base pin solder depth			---	---	---	---	---	---
1041	Shock	3,4	450 G; Ehk = +450 Vdc; Ec = -7 Vdc; Rp = 2,000 ohms; Rk = 0	---	See note 11	---	---	---	---
1031	Sweep-frequency vibration fatigue	10	F = 50 to 500 Hz; 2.5 G; Ef = 6.3 V; no other voltages applied (except t = 48 hours)	6.5	See note 11	---	---	---	---
---	Post-shock and sweep-frequency vibration-fatigue-test end points:								
1031	Sweep-frequency vibration			---	---	Ep	---	500	mVac
1336	Heater-cathode leakage			---	---	Ihk	---	50	µAdc

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:13Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	NOTES	CONDITIONS	AQL (PERCENT DEFECTIVE)	INSPECTION LEVEL OR CODE	SYMBOL	LIMITS MIN	LIMITS MAX	UNIT
	Quality conformance inspection, part 2 -Continued								
---	Post-shock and sweep-frequency vibration-fatigue-test end points: -Continued								
1306	Transconductance (1)			---	---	±Smt	---	10	%
126[illegible]	Total grid current			---	---	Ic	0	-1.5	µAdc
1261	Electrode voltage (anode)	6	Rk = 0; Ec = 0; Eb/Ik = 200 mAdc	---	---	Eb	---	70	Vdc
1131	Metallic base sleeve quality			---	---	---	---	---	---
1105	Permanence of marking			---	---	---	---	---	---
	Quality conformance inspection, part 3								
1506	Heater-cycling life		Ef = 7.5 V; Ehk = 300 Vac; Eb = Ec = 0; 1 min "on" 4 min "off"	---	---	---	---	---	---
---	Heater-cycling life-test end point:								
1336	Heater-cathode leakage			---	---	Ihk	---	50	µAdc
1516	Stability life	6	Eb = 150 Vdc; Ehk = 300 Vac; Rk/k = 400 ohms; TA = room	---	---	---	---	---	---
---	Stability life-test end point (1 hour):								
1306	Transconductance (1) change of individual tubes			---	---	±Smt	---	10	%
1501	Intermittent life	5,12	Stability life-test conditions; TE = 250°C (min)	---	---	---	---	---	---
---	Intermittent life-test end points (1,000 hours):								
---	Inoperatives			---	---	---	---	---	---
1266	Total grid current			---	---	Ic	0	-5	µAdc
1306	Transconductance (2)			---	---	±SmEf	---	10	%
1336	Heater-cathode leakage			---	---	Ihk	---	25	µAdc
1301	Heater current			---	---	If	2.35	2.75	A
1306	Transconductance (1) change of individual tubes			---	---	±Smt	---	15	%
1211	Insulation of electrodes			---	---	R	100	---	Meg

NOTES:

1. Maximum grid-circuit resistance:
   a. 1.0 megohm for cathode-bias operation.
   b. 0.1 megohm for fixed-bias operation.
   c. 0.1 megohm for combined fixed-and cathode-bias operation.
2. See "Reduced pressure (altitude) rating", and altitude, maximum peak voltage in the basic document.

Source: https://assist.dla.mil -- Downloaded: 2026[illegible]-15T15:13Z
Check the source to verify that this is the current version before use.

NOTES: - Continued

3. A grid resistor of 0.1 megohm shall be added to each section; however, this resistor shall not be used when a thyratron-type short indicator is employed.

4. Tie 1k to 2k; 1g to 2g; and 1a to 2a.

5. Envelope temperature (TE) requirements when measured in accordance with the temperature by conduction-band measurement (method 1226), will be satisfied if a tube having bogey Ib (±5 percent) under normal test conditions, is determined to operate at or above minimum specified temperature at any position in the life-test rack.

6. Test each unit separately.

7. Both units shall be operating.

8. This test to be performed at the conclusion of the holding period.

9. Rk bypassed with 1,000 µF capacitor.

10. Sweep-frequency vibration and fatigue-test procedure:

    a. This test shall be performed with an average acceleration level equal to the specified value while being swept continuously during a time of approximately 1 minute through the frequency range of 50 to 500 Hz and back to 50 Hz.

    b. The total excitation time for the test shall be not less than 3 minutes. The tube shall be mounted in each of three planes X, Y, and Z for one-third of the total excitation time. In each mounting plane, the tube shall experience at least one complete frequency sweep.

11. This test shall be conducted on the initial lot and thereafter on a lot approximately every 12 months. In the event of lot failure, the lot shall be rejected and the succeeding lots shall be subjected to this test until a lot passes. When one lot has passed, the 12-month rule shall apply. MIL-STD-105, sample size code letter E, shall apply.

12. The life-test sample shall consist of 20 tubes per lot and not more than 1 tube failure shall be permitted. In the event of rejection of the first sample, due to failure of more than 1 tube, a second sample of 40 tubes shall be selected from the lot. Acceptance shall then be based on the combined first and second samples. The total tube failures from the combined first and second samples shall not exceed three.

13. Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Air Force - 99
DLA - ES


User activities:
Army - AR
Navy - AS, OS, MC, CG
Air Force - 11

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5960-3285)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:13Z
Check the source to verify that this is the current version before use.

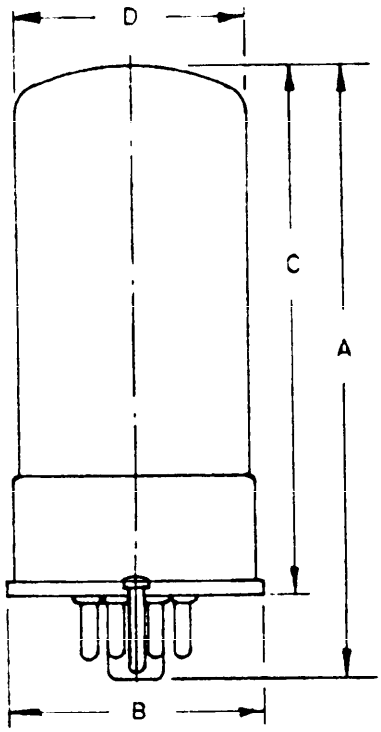

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses			
	Minimum		Maximum	
Quality conformance inspection, part 1				
A			4.063	(103.20)
B			1.719	(43.66)
C	3.125	(79.38)	3.500	(88.90)
D	1.438	(36.53)	1.563	(39.70)

FIGURE 1. Outline drawing of electron tube type 6080WC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:13Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:13Z
Check the source to verify that this is the current version before use.