MILITARY SPECIFICATION

CIRCUIT BOARD, +24 VOLT CONVERTER, VOLTAGE CONVERTER (PIVADS): 9397385

This amendment forms a part of Military Specification MIL-C-70582B (AR), dated 23 August 1990, and is approved for use by the U.S. Army Armament, Munitions, and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 5

Add amplitude requirements to Paragraph 3.5.5 as follows:

"The output signal shall have a minimum peak-peak value of 14.5 V."

PAGE 12

Change Paragraph 4.7.3.3c as follows:

From: 15VDC $\pm$ .15VDC

To: 14.5V p-p min.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:44Z
Check the source to verify that this is the current version before use.

Change from:

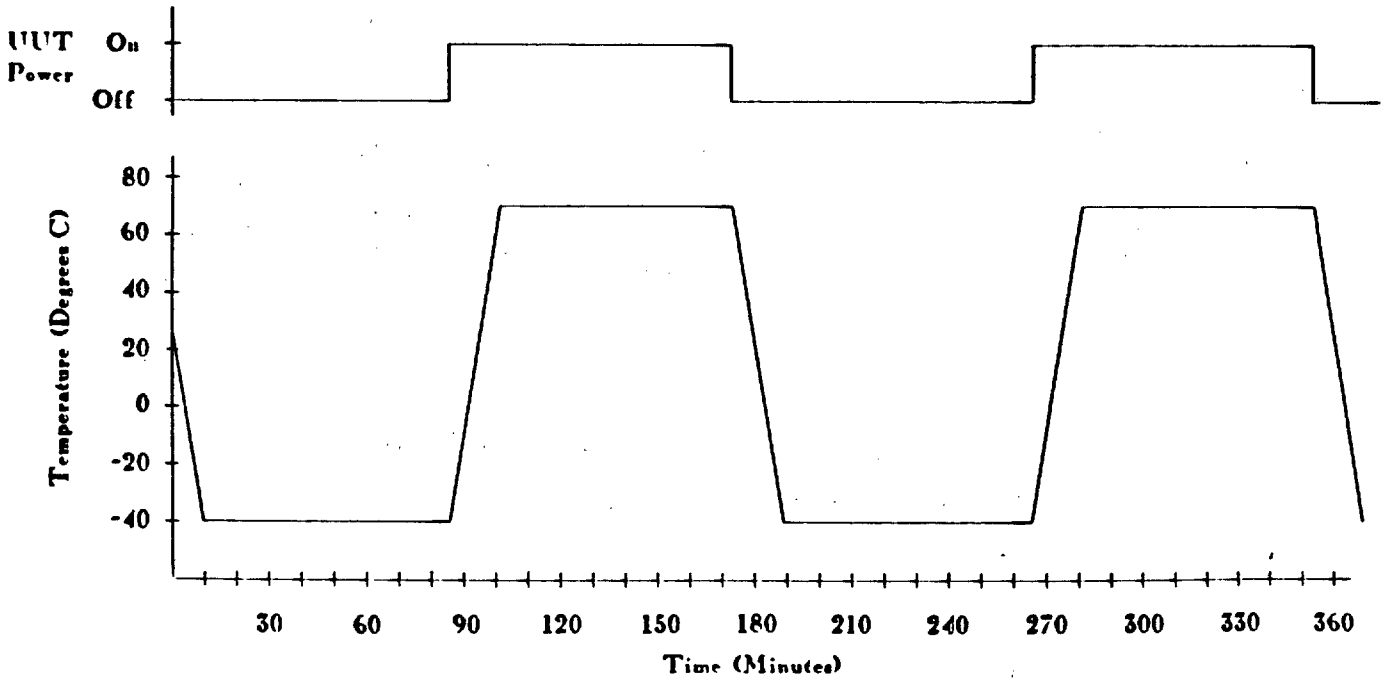


Figure 1. Burn-in Temperature Versus Time Diagram

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:44Z
Check the source to verify that this is the current version before use.

TO:

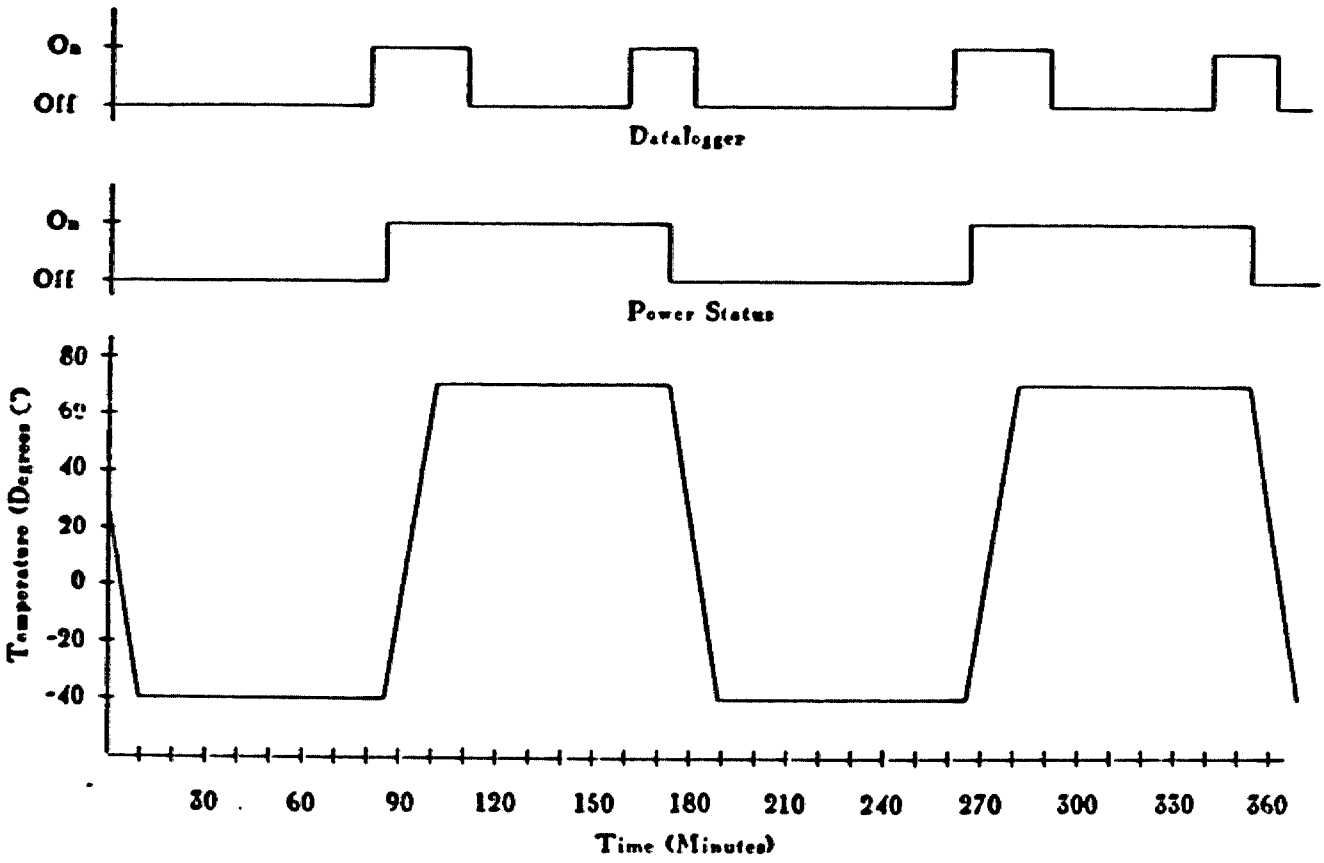


Figure 1. Burn-in Temperature Versus Time Diagram

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1285-A795)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:44Z
Check the source to verify that this is the current version before use.