INCH-POUND

MIL-DTL-55302/96E
17 November 2004

SUPERSEDING
MIL-C-55302/96D(CR)
12 February 1982

DETAIL SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: RECEPTACLE, WRAPPOST (REMOVABLE) HERMAPHRODITIC CONTACTS (.100 INCH SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-55302.


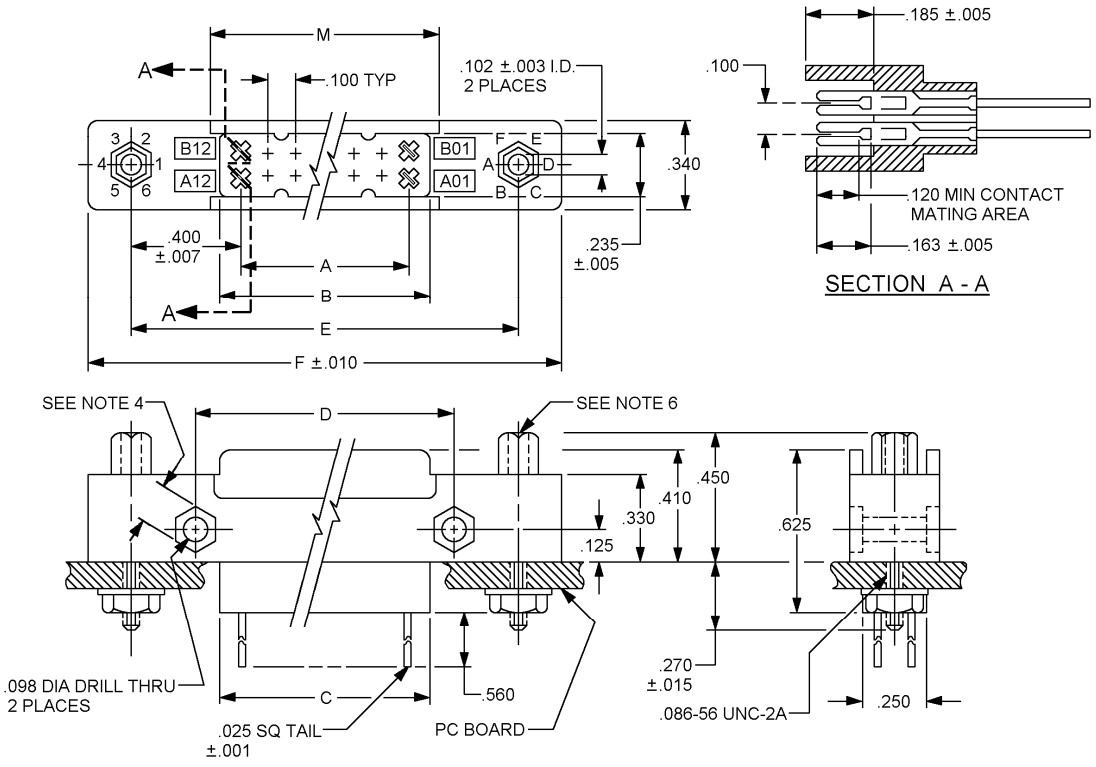


FIGURE 1. Connector, receptacle (.100 inch spacing).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

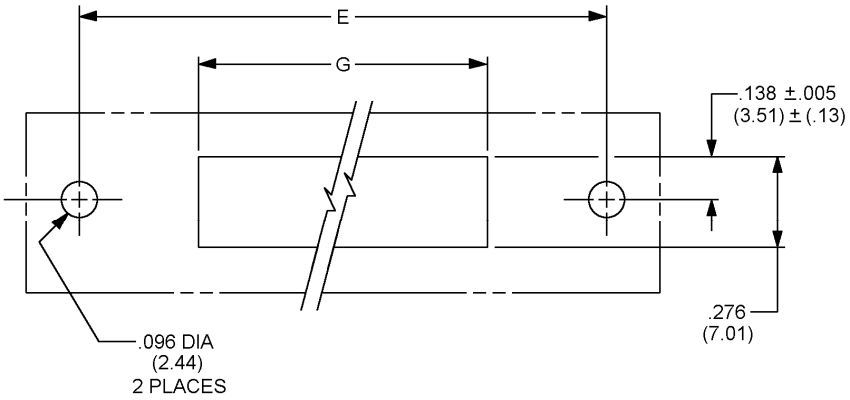

TYPICAL HOLE CUTOUT IN NONCONDUCTIVE CHASSIS

Inches	mm	Inches	mm
.001	0.03	.185	4.70
.003	0.08	.235	5.97
.005	0.13	.250	6.35
.007	0.18	.270	6.86
.015	0.38	.276	7.01
.086	2.18	.320	8.13
.091	2.31	.340	8.64
.096	2.44	.400	10.16
.098	2.49	.410	10.41
.100	2.54	.450	11.43
.102	2.59	.462	11.73
.120	3.05	.560	14.22
.125	3.18	.625	15.88
.138	3.51		
.163	4.14		

Dash number	Number of contacts	Dimensions							
		A ±.006 (.015)	B ±.006 (.015)	C	D ±.006 (.015)	E ±.006 (.015)	F	G ±.006 (.015)	M ±.006 (.015)
01	24	1.100 (27.94)	1.236 (31.39)	1.240 (31.50)	1.400 (35.56)	1.900 (48.26)	2.200 (55.88)	1.260 (32.00)	1.270 (32.26)
02	28	2.300 (58.42)	2.436 (61.87)	2.440 (61.98)	2.600 (66.04)	3.100 (78.74)	3.400 (86.38)	2.460 (62.48)	2.470 (62.74)
03	72	3.500 (88.90)	3.636 (92.35)	3.640 (92.46)	3.800 (96.52)	4.300 (109.22)	4.600 (116.84)	3.600 (92.96)	3.670 (93.22)
04	96	4.700 (119.38)	4.836 (122.83)	4.840 (122.94)	5.000 (127.00)	5.500 (139.70)	5.800 (147.32)	4.860 (123.44)	4.870 (123.70)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± .010 (0.25 mm).
4. Dimensions are .162 (4.11 mm) hex across the flats by .052 deep (1.32 mm) – 4 places.
5. Metric equivalents are in parentheses.
6. Keying sockets shown are in positions 4 and D.

FIGURE 1. Connector receptacle (.100 inch spacing) – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations: See figure 1.

Material and finish:

Contact: 0.020 inch thick phosphor bronze in accordance ASTM B139, composition A. Gold plate in accordance with ASTM B488, type 2, code D, class 1.27, over nickel plating in accordance with SAE-AMS-QQ-N-290, class 2, 30 to 100 microinches.

Insulation: ASTM D5948, type SDG-F.

Keying hardware: 2 each hex nuts and washers, stainless steel, class 300 in accordance with ASTM A582, passivated in accordance with SAE-AMS-QQ-P-35, and 2 each keying sockets, free machining brass in accordance with ASTM B16, UNS C36000 or ASTM B121, UNS C35300, C34200 or ASTM B124, UNS C37700, ASTM B36, UNS C23000, C24000, C26000 or C26800, nickel plated in accordance with SAE-AMS-QQ-N-290. For direct government procurement the keying hardware shall be assembled to the connector. For other orders the keying hardware may be furnished loose as specified in contract or order.

Contact identification: The first and last contact in each row shall be identified by an alphabetical-numerical code (e.g., A01, B12). The letter designates the row and the number designates the contact position within that row. Every fifth contact in each row shall have its identification mark molded in.

Contact retention: 6 pounds.

Mating and unmating: The maximum insertion force, in pounds, shall not exceed a value equal to .5 times the number of contacts, and the withdrawal force, in pounds, shall be a minimum of .11 times the number of contacts and shall not exceed the measured insertion force.

Contact separation force: 1 ounce minimum.

Contact resistance: The contact resistance shall not exceed 20 milliohms.

Dielectric withstanding voltage:

Sea level: 1,000 volts rms, 60 Hz.

High altitude: 300 volts rms, 60Hz.

Current rating, maximum: 5 amperes.

Keying socket: When required, can be easily keyed to the desired positions by using a standard type wrench. Connectors are supplied with keying sockets in 4 and D positions.

Mating connectors: Shall conform to MIL-DTL-55302/91, or MIL-DTL-55302/93 and MIL-DTL-55302/95.

Contact insertion tool: Shall conform to MIL-I-81969/5.

Contact removal tool: Shall conform to MIL-I-81969/4.

Contact wrappost tool: Shall conform to MIL-DTL-55302/98.

Part or Identifying Number (PIN): M55302/96-(dash number from figure I).

Group submission: MIL-DTL-55302/90, MIL-DTL-55302/92, and MIL-DTL-55302/94.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-55302, this document references the following:

MIL-DTL-55302/90	ASTM A582	SAE-AMS-QQ-N-290
MIL-DTL-55302/91	ASTM B16	SAE-AMS-QQ-P-35
MIL-DTL-55302/92	ASTM B36	MIL-I-81969/4
MIL-DTL-55302/93	ASTM B121	MIL-I-81969/5
MIL-DTL-55302/94	ASTM B124	
MIL-DTL-55302/95	ASTM B139	
MIL-DTL-55302/98	ASTM B488	
	ASTM D5948	

Previous changes. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

CONCLUDING MATERIAL

Custodians:
Army – CR
DLA – CC

Preparing activity:
DLA - CC

(Project 5935-4440-015)

Review activities:
Army – AR, AT, AV, CR4, MI

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:49Z
Check the source to verify that this is the current version before use.