
MILITARY SPECIFICATION SHEET

TERMINAL BOARDS, MOLDED, BARRIER, SCREW TYPE, CLASS 43TB

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the terminal boards described herein shall consist of this document and the latest issue of Specification MIL-T-55164.

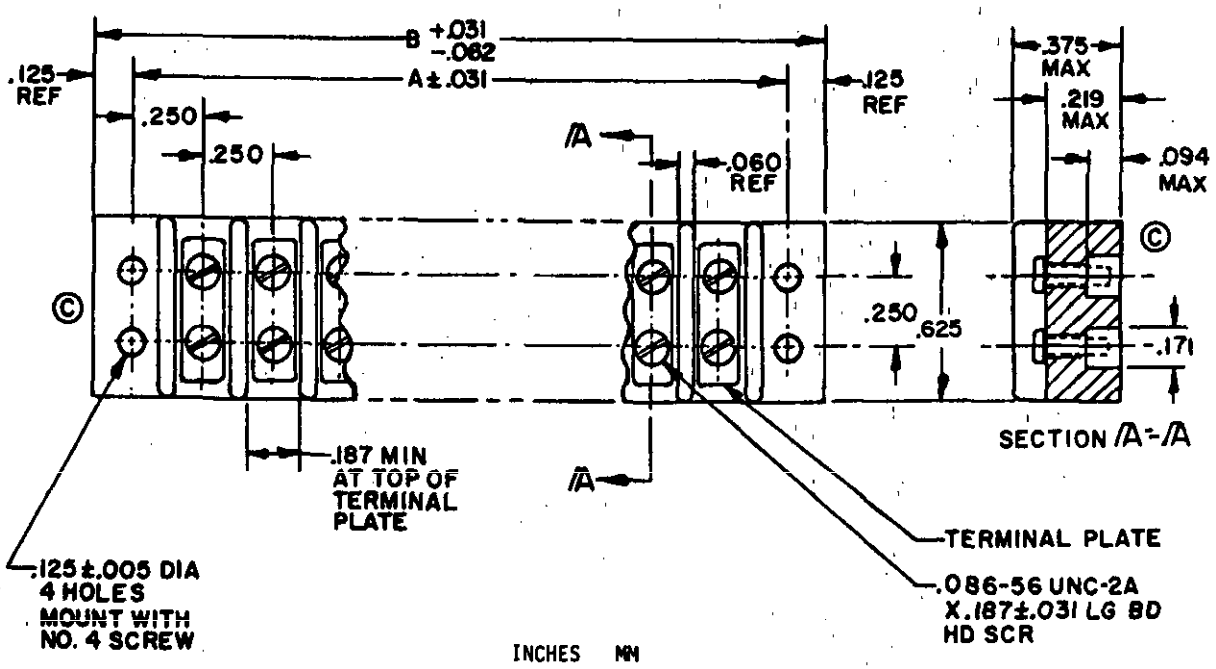

INCHES	MM
.005	.13
.031	.79
.060	1.52
.086	2.18
.094	2.39
.125	3.18
.171	4.34
.187	4.75
.219	5.56
.250	6.35
.375	9.52
.625	15.88

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is .xxx±.016.
4. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.

© denotes changes.

FSC 5940

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.

Type designation	Dimensions 1/ A ±.031(.79)	Dimensions 1/ B +.031 (.79) -.062 (1.57)	Terminal board lugs	National stock number
				NSN 5940-00-
43TB1 2/	.500(12.70)	.750(19.05)		431-8619
43TB2	.750(19.05)	1.000(25.40)		474-9831
43TB3	1.000(25.40)	1.250(31.75)		474-9832
43TB4	1.250(31.75)	1.500(38.10)		474-9833
43TB5	1.500(38.10)	1.750(44.45)		474-9840
43TB6	1.750(44.45)	2.000(50.80)		474-9859
43TB7	2.000(50.80)	2.250(57.15)		474-9860
43TB8	2.250(57.15)	2.500(63.50)		474-9861
43TB9	2.500(63.50)	2.750(69.85)		474-9862
43TB10	2.750(69.85)	3.000(76.20)		474-9863
43TB11	3.000(76.20)	3.250(82.55)	TBLD43	476-5610
43TB12	3.250(82.55)	3.500(88.90)	TBLS43	476-5611
43TB13 2/	3.500(88.90)	3.750(95.25)		474-9866
43TB14	3.750(95.25)	4.000(101.60)		474-9896
43TB15 2/	4.000(101.60)	4.250(107.95)		474-9899
43TB16	4.250(107.95)	4.500(114.30)		476-5604
43TB17 2/	4.500(114.30)	4.750(120.65)		476-5605
43TB18	4.750(120.65)	5.000(127.00)		476-5606
43TB19 2/	5.000(127.00)	5.250(133.35)		476-5607
43TB20	5.250(133.35)	5.500(139.70)		476-5608
43TB21 2/	5.500(139.70)	5.750(146.05)		474-9909
43TB22	5.750(146.05)	6.000(152.40)		476-5609

1/ Dimensions are in inches with the metric equivalents shown in parentheses.
2/ Not to be used for new design.

REQUIREMENTS:

Dimensions and configuration: See figure and table.

Voltage rating (maximum): 150 volts.

Current rating: 5 amperes.

Molded material: Type GDI-30F per MIL-M-14.

Terminal material: Alloy 752 per QQ-C-585, unplated.

Dielectric withstanding test voltage: 2,000 volts rms.

Custodians:
Army - EL
Navy - SH
Air Force - 99

Review activities:
Army - MU
Navy - OS, EC
Air Force - 17
DLA - GS

User activities:
Army - AT, AV
Navy - MC, AS
Air Force -

Preparing activity:
Army - EL

Agent:
DLA- ES

(Project 5940-0810)

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:32Z
Check the source to verify that this is the current version before use.