INCH-POUND

MIL-DTL-24235/2C(SH)
w/AMENDMENT 1
06 February 2019

SUPERSEDING
MIL-S-24235/2C(SH)
28 December 1992

DETAIL SPECIFICATION SHEET

STUFFING TUBE, PACKING ASSEMBLIES FOR PRESSUREPROOF BULKHEAD

This specification is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-S-24235.

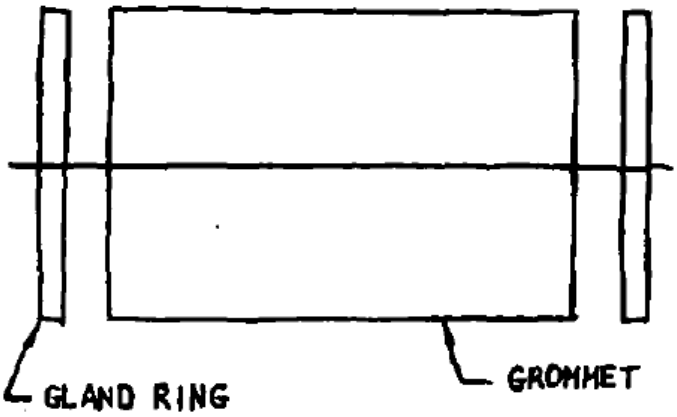


FIGURE 1. Packing assembly for tube sizes 1, 2, and 3.

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances shall be as follows:
   Decimals – plus or minus 0.005 inch
   Fractions – plus or minus 1/64 inch
   Angular dimensions – plus or minus 30 minutes
   Guidance pertaining to molded parts should conform to MIL-HDBK-149

Comments, suggestions, or questions on this document should be addressed to Commander, Naval Sea Systems Command, ATTN: SEA 05S, 1333 Isaac Hull Avenue, SE, Stop 5160, Washington Navy Yard DC 20376-5160 or emailed to CommandStandards@navy.mil, with the subject line "Document Comment". Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 5975

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:22Z
Check the source to verify that this is the current version before use.

TABLE I. Packing assembly part or identifying numbers for tube sizes 1, 2 and 3.

		Part or identifying numbers of components		
Tube size [1/]	**Packing assembly part or identifying number**	**Gland ring 4 required**	**Grommet 2 required**	**Symbol no.**
1	M24235/2 -*001	M24235/2 -120	M24235/2 -*061	2405.1
	M24235/2 -*002	M24235/2 -121	M24235/2 -*062	2405.2
	M24235/2 -*003	M24235/2 -122	M24235/2 -*063	2405.3
	M24235/2 -*004	M24235/2 -123	M24235/2 -*064	2405.4
	M24235/2 -*005	M24235/2 -124	M24235/2 -*065	2405.5
	M24235/2 -*006	M24235/2 -125	M24235/2 -*066	2405.6
	M24235/2 -*007	M24235/2 -126	M24235/2 -*067	2405.7
2	M24235/2 -*008	M24235/2 -127	M24235/2 -*068	2406.1
	M24235/2 -*009	M24235/2 -128	M24235/2 -*069	2406.2
	M24235/2 -*010	M24235/2 -129	M24235/2 -*070	2406.3
	M24235/2 -*011	M24235/2 -130	M24235/2 -*070	2406.5
	M24235/2 -*012	M24235/2 -131	M24235/2 -*071	2406.4
3	M24235/2 -*013	M24235/2 -132	M24235/2 -*072	2407.1
	M24235/2 -*014	M24235/2 -133	M24235/2 -*073	2407.2
	M24235/2 -*015	M24235/2 -134	M24235/2 -*073	2407.5
	M24235/2 -*016	M24235/2 -135	M24235/2 -*074	2407.3
	M24235/2 -*017	M24235/2 -136	M24235/2 -*074	2407.6
	M24235/2 -*018	M24235/2 -137	M24235/2 -*075	2407.7
	M24235/2 -*019	M24235/2 -138	M24235/2 -*076	2407.4

FOOTNOTE:

[1/] See MIL-S-24235/1.

NOTE: The asterisk "*" represents item material. The material shall be Neoprene (N) or Silicone (S) in accordance with the part list.

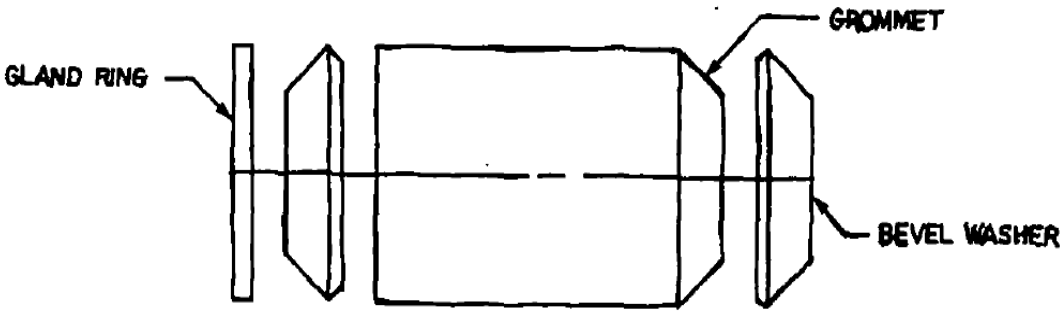


FIGURE 2. Packing assembly for tube sizes 4 through 9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:22Z
Check the source to verify that this is the current version before use.

TABLE II. Packing assembly part or identifying numbers for tube sizes 4 through 9.

		Part or identifying numbers of components			
Tube size [1/]	**Packing assembly part or identifying number**	**Gland ring 2 required**	**Bevel washer 4 required**	**Grommet 2 required**	**Symbol no.**
4	M24235/2 -*030	M24235/2 -139	M24235/2 -160	M24235/2 -*090	2408.5
	M24235/2 -*031	M24235/2 -139	M24235/2 -161	M24235/2 -*091	2408.1
	M24235/2 -*032	M24235/2 -139	M24235/2 -162	M24235/2 -*092	2408.2
	M24235/2 -*033	M24235/2 -139	M24235/2 -163	M24235/2 -*093	2408.3
	M24235/2 -*034	M24235/2 -139	M24235/2 -164	M24235/2 -*094	2408.4
5	M24235/2 -*035	M24235/2 -140	M24235/2 -165	M24235/2 -*095	2409.1
	M24235/2 -*036	M24235/2 -140	M24235/2 -166	M24235/2 -*096	2409.2
	M24235/2 -*037	M24235/2 -140	M24235/2 -167	M24235/2 -*097	2409.3
6	M24235/2 -*038	M24235/2 -141	M24235/2 -168	M24235/2 -*098	2410.1
	M24235/2 -*039	M24235/2 -141	M24235/2 -169	M24235/2 -*099	2410.2
	M24235/2 -*040	M24235/2 -141	M24235/2 -170	M24235/2 -*100	2410.3
7	M24235/2 -*041	M24235/2 -142	M24235/2 -171	M24235/2 -*101	2411.5
	M24235/2 -*042	M24235/2 -142	M24235/2 -172	M24235/2 -*102	2411.1
	M24235/2 -*043	M24235/2 -142	M24235/2 -173	M24235/2 -*103	2411.2
	M24235/2 -*044	M24235/2 -142	M24235/2 -174	M24235/2 -*104	2411.3
	M24235/2 -*045	M24235/2 -142	M24235/2 -175	M24235/2 -*105	2411.4
8	M24235/2 -*046	M24235/2 -143	M24235/2 -176	M24235/2 -*106	2412.1
	M24235/2 -*047	M24235/2 -143	M24235/2 -177	M24235/2 -*107	2412.2
	M24235/2 -*048	M24235/2 -143	M24235/2 -178	M24235/2 -*108	2412.3
9	M24235/2 -*049	M24235/2 -144	M24235/2 -179	M24235/2 -*109	2413.1
	M24235/2 -*050	M24235/2 -144	M24235/2 -180	M24235/2 -*110	2413.2

FOOTNOTE:

[1/] See MIL-S-24235/1.

NOTE: The asterisk "*" represents item material. The material shall be Neoprene (N) or Silicone (S) in accordance with the part list.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:22Z
Check the source to verify that this is the current version before use.

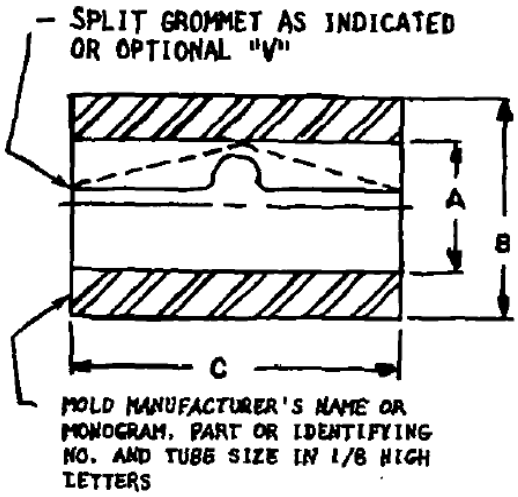


FIGURE 3. Grommet configuration for tube sizes 1, 2, and 3.

TABLE III. Grommet dimensions for tube sizes 1, 2, and 3.

Tube size	Part or identifying number	A DIA	B DIA	C
1	M24235/2 -*061	0.312	0.986	1 1/4
	M24235/2 -*062	0.404	0.986	1-1/4
	M24235/2 -*063	0.455	0.986	1-1/4
	M24235/2 -*064	0.490	0.986	1-1/4
	M24235/2 -*065	0.530	0.986	1-1/4
	M24235/2 -*066	0.558	0.986	1-1/4
	M24235/2 -*067	0.590	0.986	1-1/4
2	M24235/2 -*068	0.636	1.173	1-1/2
	M24235/2 -*069	0.680	1.173	1-1/2
	M24235/2 -*070	0.730	1.173	1-1/2
	M24235/2 -*071	0.800	1.173	1-1/2
3	M24235/2 -*072	0.836	1.486	1-15/16
	M24235/2 -*073	0.900	1.486	1-15/16
	M24235/2 -*074	0.950	1.486	1-15/16
	M24235/2 -*075	1.000	1.486	1-15/16
	M24235/2 -*076	1.050	1.486	1-15/16

NOTE: The asterisk “*” represents item material. The material shall be Neoprene (N) or Silicone (S) in accordance with the part list.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:22Z
Check the source to verify that this is the current version before use.

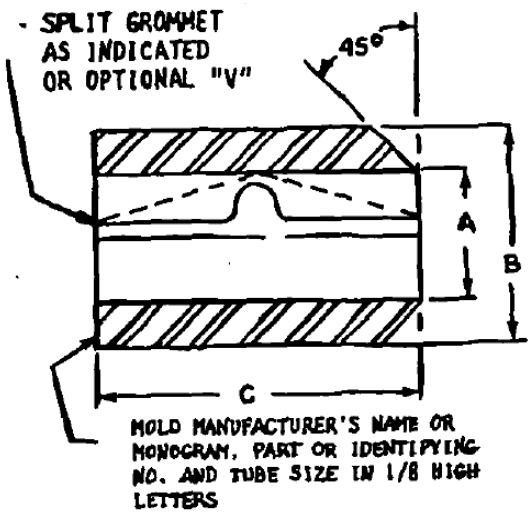


FIGURE 4. Grommet configuration for tube sizes 4 through 9.

TABLE IV. Grommet dimensions for tube sizes 4 through 9.

Tube size	Part or identifying number	A DIA	B DIA	C
4	M24235/2 -*090	1.075	1.673	2-1/2
	M24235/2 -*091	1.115	1.673	2-1/2
	M24235/2 -*092	1.130	1.673	2-1/2
	M24235/2 -*093	1.174	1.673	2-1/2
	M24235/2 -*094	1.250	1.673	2-1/2
5	M24235/2 -*095	1.300	1.923	3
	M24235/2 -*096	1.370	1.923	3
	M24235/2 -*097	1.415	1.923	3
6	M24235/2 -*098	1.470	2.173	3-1/4
	M24235/2 -*099	1.525	2.173	3-1/4
	M24235/2 -*100	1.570	2.173	3-1/4
7	M24235/2 -*101	1.675	2.548	3-1/2
	M24235/2 -*102	1.715	2.548	3-1/2
	M24235/2 -*103	1.750	2.548	3-1/2
	M24235/2 -*104	1.783	2.548	3-1/2
	M24235/2 -*105	1.840	2.548	3-1/2
8	M24235/2 -*106	1.885	2.861	3-5/8
	M24235/2 -*107	2.000	2.861	3-5/8
	M24235/2 -*108	2.119	2.861	3-5/8
9	M24235/2 -*109	2.200	2.986	3-3/4
	M24235/2 -*110	2.250	2.986	3-3/4

NOTE: The asterisk "*" represents item material. The material shall be Neoprene (N) or Silicone (S) in accordance with the part list.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:22Z
Check the source to verify that this is the current version before use.

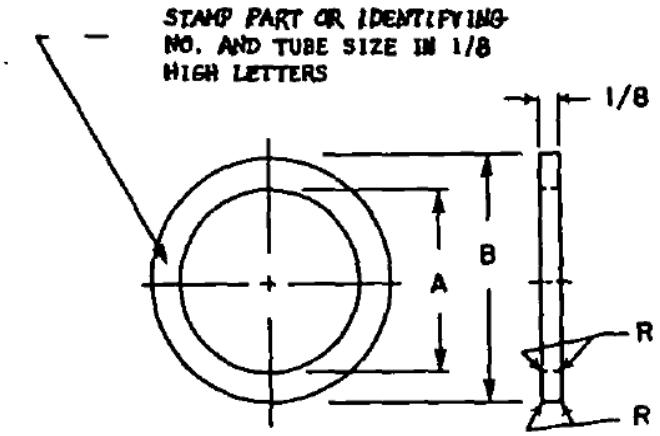


FIGURE 5. Gland configuration.

TABLE V. Gland ring dimensions for tube sizes 1 through 9.

Tube size	Part or identifying number	A DIA	B DIA
1	M24235/2 -120	0.323	0.997
	M24235/2 -121	0.414	0.997
	M24235/2 -122	0.461	0.997
	M24235/2 -123	0.500	0.997
	M24235/2 -124	0.534	0.997
	M24235/2 -125	0.563	0.997
	M24235/2 -126	0.609	0.997
2	M24235/2 -127	0.644	1.184
	M24235/2 -128	0.695	1.184
	M24235/2 -129	0.740	1.184
	M24235/2 -130	0.760	1.184
	M24235/2 -131	0.812	1.184
3	M24235/2 -132	0.852	1.497
	M24235/2 -133	0.905	1.497
	M24235/2 -134	0.927	1.497
	M24235/2 -135	0.961	1.497
	M24235/2 -136	0.992	1.497
	M24235/2 -137	1.032	1.497
	M24235/2 -138	1.062	1.497
4	M24235/2 -139	1.265	1.684
5	M24235/2 -140	1.437	1.934
6	M24235/2 -141	1.625	2.184
7	M24235/2 -142	1.875	2.549
8	M24235/2 -143	2.187	2.860
9	M24235/2 -144	2.312	2.987

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:22Z
Check the source to verify that this is the current version before use.

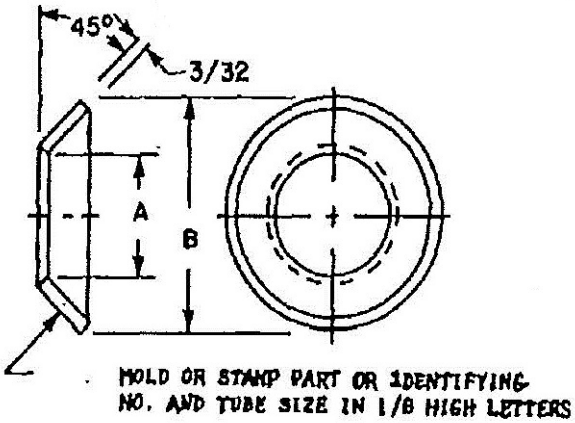


FIGURE 6. Bevel washer configuration.

TABLE VI. Bevel washer dimensions for tube sizes 4 through 9.

Tube size	Part or identifying number	A DIA	B DIA
4	M24235/2 -160	1.095	1.704
	M24235/2 -161	1.125	1.704
	M24235/2 -162	1.140	1.704
	M24235/2 -163	1.185	1.704
	M24235/2 -164	1.265	1.704
5	M24235/2 -165	1.330	1.954
	M24235/2 -166	1.375	1.954
	M24235/2 -167	1.421	1.954
6	M24235/2 -168	1.479	2.184
	M24235/2 -169	1.535	2.184
	M24235/2 -170	1.625	2.184
7	M24235/2 -171	1.690	2.549
	M24235/2 -172	1.719	2.549
	M24235/2 -173	1.759	2.549
	M24235/2 -174	1.793	2.549
	M24235/2 -175	1.844	2.549
8	M24235/2 -176	1.891	2.860
	M24235/2 -177	2.007	2.860
	M24235/2 -178	2.123	2.860
9	M24235/2 -179	2.209	2.987
	M24235/2 -180	2.253	2.987

REQUIREMENTS

1. Intended use. The packing assemblies are for MIL-S-24235/1 stuffing tubes. Nuclear bulkhead applications require silicone grommets. Nonnuclear applications permit the use of neoprene for the grommet material.

2. Application. See MIL-STD-2003-3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:22Z
Check the source to verify that this is the current version before use.

TABLE VII. Parts list.

Item no.	Description [1/]	Qty [2/] 1-3	Qty [2/] 4-9	Material and specification	Remarks
01	Packing assemblies (sizes 1 through 3)	-	-	--	See figure 1 and table I
02	Packing assemblies (sizes 4 through 9)	-	-	--	See figure 2 and table II
03	Grommet (50 durometer)	2		Neoprene, class 1, [3/] MIL-PRF-15624, color black; or silicone, class 2, A-A-59588, colors red or white	See figure 3 and table III
04	Grommet (50 durometer)		2	Neoprene, class 1, [3/] MIL-PRF-15624, color black; or silicone, class 2, A-A-59588, colors red or white	See figure 4 and table IV
05	Gland ring	4	2	Steel, ASTM A1011/A1011M, zinc-plated [4/]	See figure 5 and table V
06	Bevel washer [5/]		4	Nylon, L-P-410	See figure 6 and table VI

FOOTNOTES:

1/ See MIL-S-24235/1.
2/ Quantity is for one complete assembly of each size.
3/ See requirements.
4/ Zinc plating shall be as specified in ASTM B633.
5/ May be molded.

AMENDMENT NOTATIONS. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:22Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodian
Navy – SH

Review Activity
DLA – GS

Preparing activity:
Navy – SH
(Project 5975-2019-004)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:22Z
Check the source to verify that this is the current version before use.