NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND
MIL-PRF-24236/1J
25 July 1990
SUPERSEDING
MIL-S-24236/1H
18 February 1983

PERFORMANCE SPECIFICATION SHEET

SWITCHES, THERMOSTATIC, (BIMETALLIC), SUBMINIATURE, TYPE I, HERMETICALLY SEALED, SINGLE POLE, SINGLE THROW (SPST), 5 AMPERES, AND LOW LEVEL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-PRF-24236



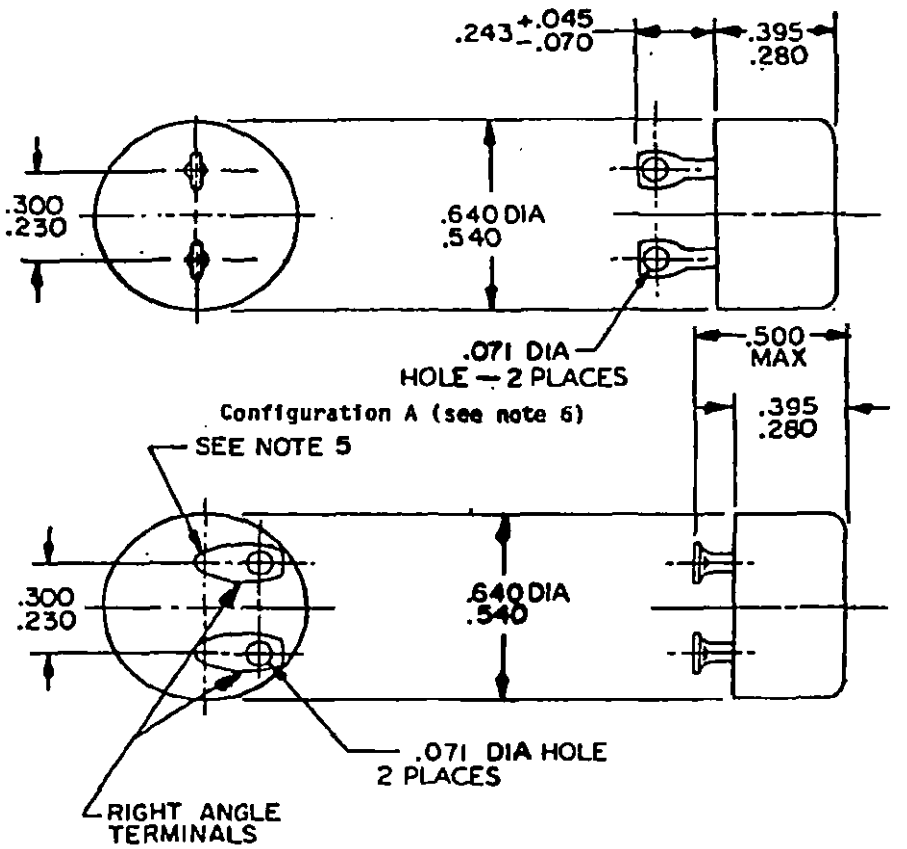


FIGURE 1. Switches, thermostatic, (bimetallic), subminiature, type I, hermetically sealed.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

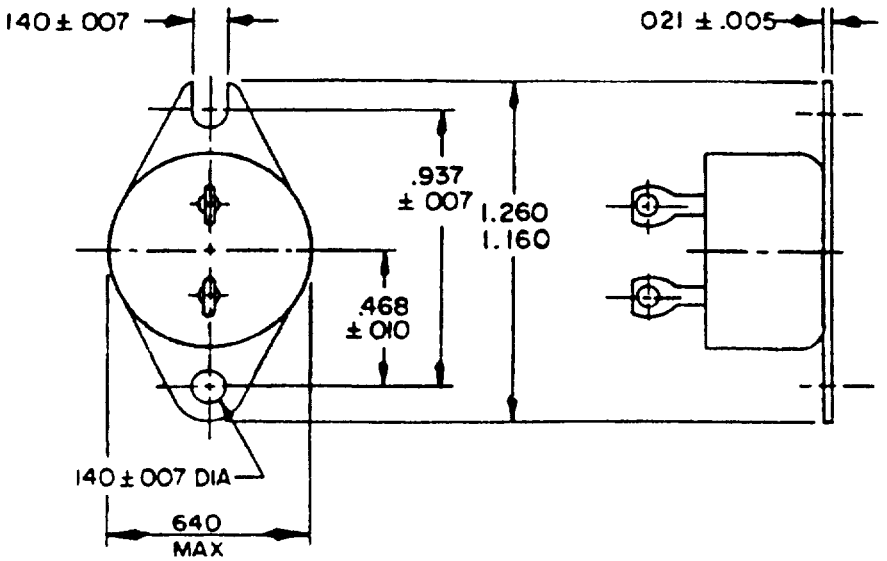


Configuration A1

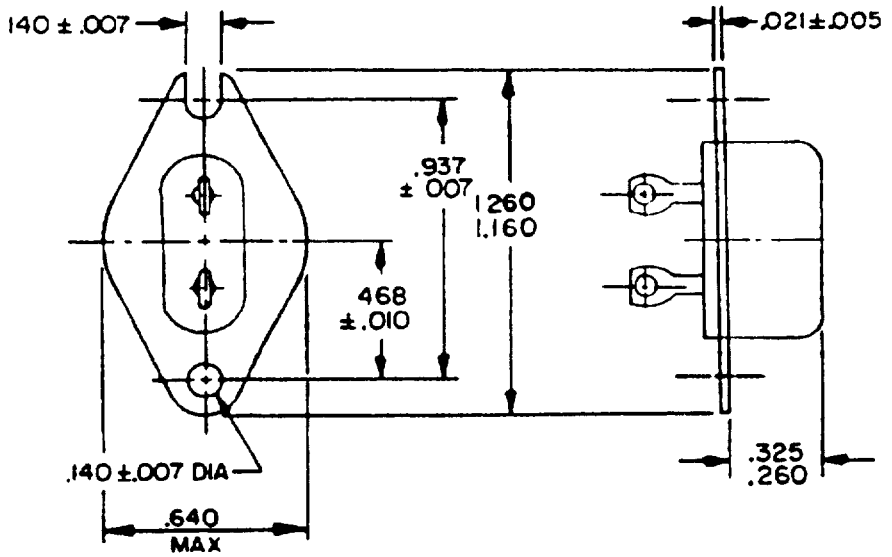


Configuration A2

FIGURE 1. Switches, thermostatic, (bimetallic), subminiature, type I, hermetically sealed - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:28Z
Check the source to verify that this is the current version before use.

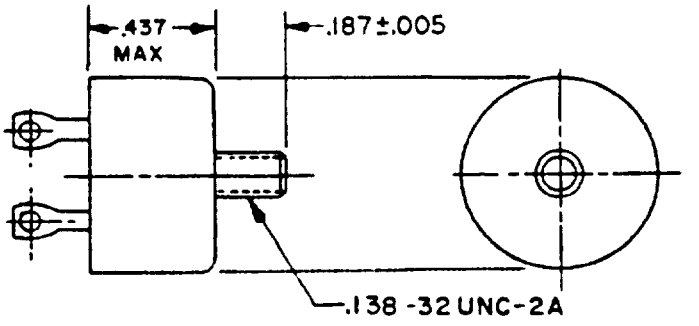


Configuration A3

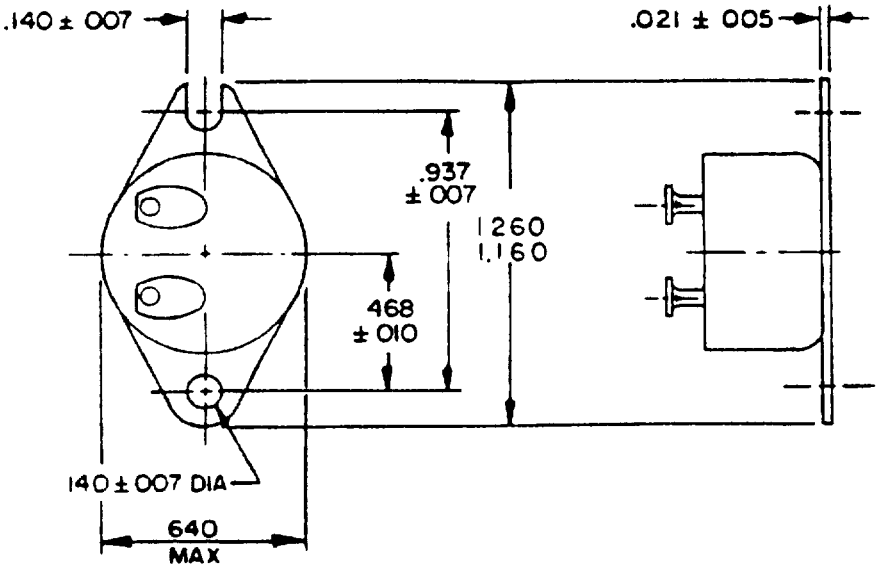


Configuration B1

FIGURE 1. Switches, thermostatic, (bimetallic), subminiature, type 1, hermetically sealed - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:28Z
Check the source to verify that this is the current version before use.

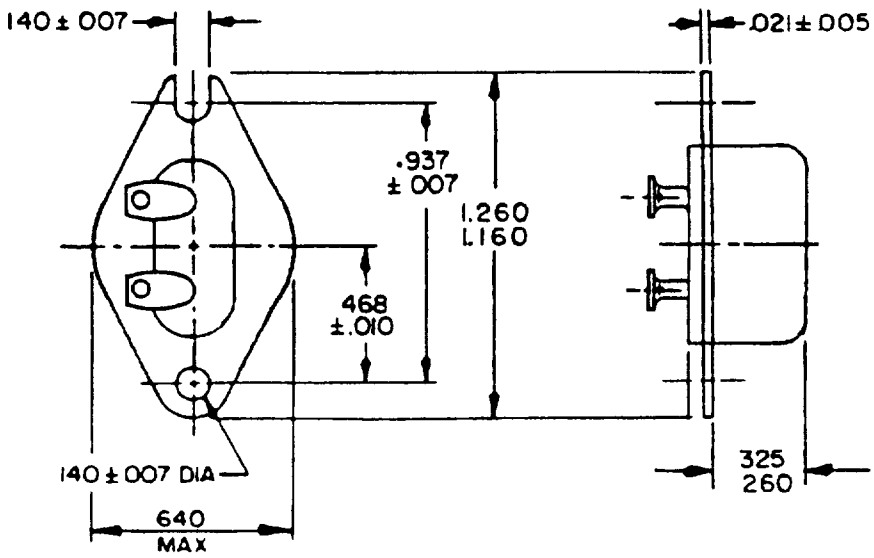


Configuration B2

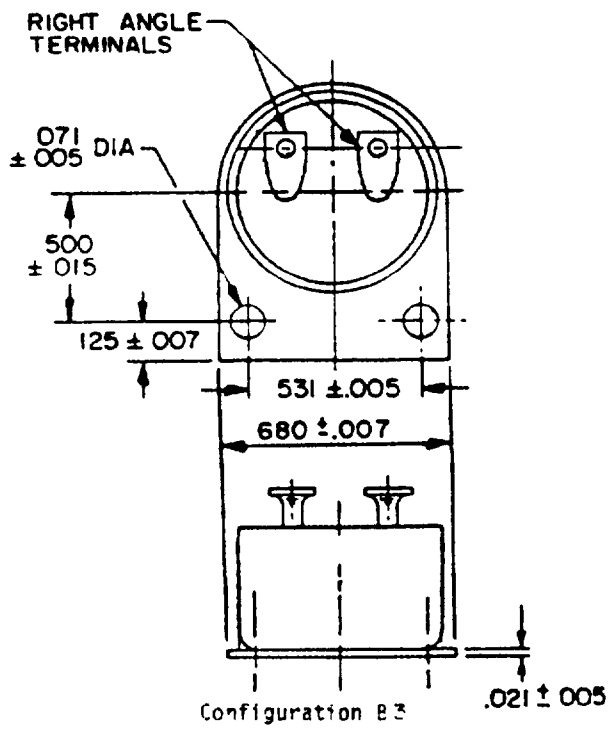

Configuration B3

FIGURE 1 Switches, thermostatic, (bimetallic), subminiature, type 1, hermetically sealed - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

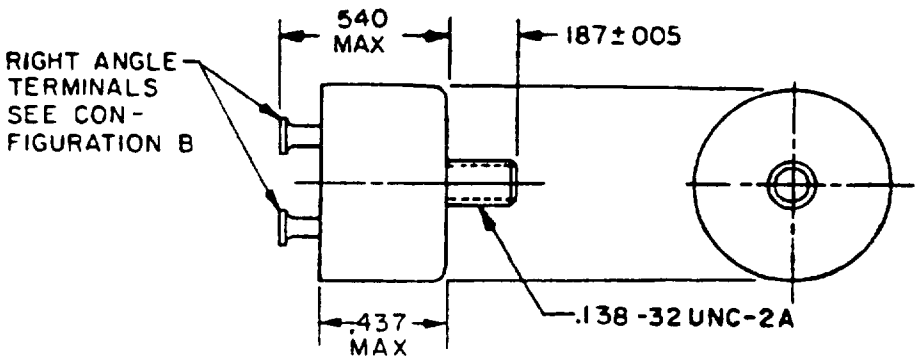

Configuration B4

Inches	mm	Inches	mm
.005	0.13	.280	7.11
.007	0.18	.300	7.62
.010	0.25	.325	8.25
.015	0.38	.395	10.03
.021	0.53	.437	11.10
.045	1.14	.468	11.89
.070	1.78	.500	12.70
.071	1.80	.531	13.49
.125	3.18	.540	13.72
.138	3.51	640	16.26
.140	3.56	.680	17.27
.187	4.75	.937	23.80
.230	5.84	1.160	29.46
.243	6.17	1 260	32.04
.260	6.60		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.015 (0.38 mm).
4. Exact shape of switch and terminals are optional provided dimensions specified are not exceeded.
5. This dimension not to exceed extended envelope of the switch.
6. Mounting brackets are not to be furnished.
7. Configurations D, D1, E, E1, F, and F1 formerly covered by this specification sheet are now covered by MIL-S-24236/20.
8. Configurations A1, A2, and A3 use basic switches of configuration A. Configurations B1, B2, and B3 use basic switches of configuration B.

FIGURE 1. Switches, thermostatic, (bimetallic), subminiature, type I, hermetically sealed - Continued.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T20:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure 1

Operating temperature range -65°F to 500°F.

Class. Class 4, unless otherwise specified in table I, except 80,000 feet altitude

Mounting See tables I and II, and figure 1.

Weight. Not to exceed .025 pound.

Operating temperature and tolerances. See table I.

Electrical ratings. See table III.

Endurance test See table III.

QUALIFICATION

Single submission Restricted to switch submitted

Group submission. See table IV.

Military part number The part number shall be selected either from table I which consists of M24236/1- (dash number from table I), or if required characteristics are not contained in this table, part numbers shall be assigned as illustrated below:

M24236/1-	A	G	F	E	H	L
Specification sheet number						
Configuration and contact action (see table II)						
High temperature setting to the nearest 25°F (see table V)						
High temperature setting to the nearest 5°F and its tolerance (see table VI)						
Low temperature setting to the nearest 25°F (see table V)						
Low temperature setting to the nearest 5°F and its tolerance (see table VI)						
Add the letter "L" when low level is required						

Part number M24236/1-AGFEHL identifies a temperature switch of configuration A which opens on increasing temperature at 65°F ±5°F and closes on decreasing temperature at 25°F ±5°F and has low level capabilities

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:28Z
Check the source to verify that this is the current version before use.

TABLE I. Operating characteristics and dash numbers.

Dash number 1/ 2/	Configuration	Class	Open on increasing temperature	Open on decreasing temperature	Tolerance	Close on increasing temperature	Close on decreasing temperature	Tolerance
			°F	°F	°F	°F	°F	°F
0100	A	4	60	---	±8	---	40	±5
0105	"	"	60	---	±5	---	35	±5
0110	"	"	70	---	±8	---	50	±5
0115	"	"	75	---	±8	---	45	±8
0120	"	"	80	---	±5	---	60	±7
0125	"	"	90	---	±8	---	70	±5
0130	"	"	115	---	±5	---	80	±7
0131	"	"	165	---	"	---	145	±5
0132	"	"	180	---	"	---	160	±5
0133	"	"	215	---	"	---	195	±5
0135	"	"	---	150	"	170	---	±7
0140	"	"	---	275	±10	325	---	±12
0200	A1	"	35	---	±5	---	15	±5
0205	"	"	37	---	"	---	20	"
0210	"	"	45	---	"	---	32	"
0214	"	"	50	---	"	---	30	"
0215	"	"	50	---	"	---	35	"
0220	"	"	50	---	"	---	40	"
0230	"	"	55	---	"	---	40	"
0235	"	"	55	---	"	---	40	"
0245	"	"	60	---	"	---	50	"
0250	"	"	60	---	"	---	40	"
0255	"	"	60	---	"	---	45	"
0260	"	"	65	---	"	---	50	"
0262	"	"	70	---	"	---	40	"
0265	"	"	75	---	"	---	60	"
0270	"	"	85	---	"	---	65	"
0275	"	"	95	---	"	---	85	"
0280	"	"	120	---	"	---	100	"
004	"	"	125	---	"	---	110	"
0281	"	"	125	---	"	---	120	"
0285	"	"	128	---	"	---	112	"
024	"	"	131	---	±3	---	120	"
0290	"	"	135	---	±5	---	110	±10
0295	"	"	140	---	"	---	130	±5
025 3/	"	"	145	---	"	---	135	"
0300	"	"	147	---	"	---	132	"
0304	"	"	150	---	"	---	120	"
0305	"	"	150	---	"	---	135	"
0306	"	"	150	---	"	---	140	"
0310	"	"	155	---	"		135	"
0315	"	"	158	---	"	---	123	"
0320	"	"	158	---	"	---	131	"
0321	"	"	160	--	"	---	140	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:28Z
Check the source to verify that this is the current version before use.

TABLE I. Operating characteristics and dash numbers - Continued.

Dash number 1/ 2/	Configuration	Class	Open on increasing temperature	Open on decreasing temperature	Tolerance	Close on increasing temperature	Close on decreasing temperature	Tolerance
			°F	°F	°F	°F	°F	°F
026	A1	4	160	---	±3	---	150	±5
0325	"	"	160	---	±5	---	145	"
0329	"	"	170	---	"	---	158	"
0330	"	"	167	---	"	---	158	"
0331	"	"	170	---	"	---	160	"
0335	"	"	173	---	±3	---	149	"
0336	"	"	173	---	±5	---	158	"
0340	"	"	176	---	"	---	160	"
0345	"	"	180	---	"	---	135	"
0350	"	"	180	---	"	---	170	"
0355	"	"	185	---	"	---	165	"
0356	"	"	185	---	±5	---	170	"
0360	"	"	190	---	"	---	170	"
0365	"	"	194	---	"	---	176	"
0370	"	"	200	---	"	---	160	"
0371	"	"	200	---	"	---	180	"
0372	"	"	200	---	"	---	185	"
0375	"	"	210	---	±8	---	175	"
0379	"	"	230	---	±5	---	205	"
0380	"	"	212	---	±8	---	192	"
0381	"	"	230	---	±5	---	220	"
0383	"	"	250	---	±8	---	210	±8
032	"	"	235	---	±5	---	215	±5
0385	"	"	265	---	±8	---	180	±5
0390	"	"	270	---	"	---	230	±6
0395	"	"	272	---	"	---	220	±6
0400	"	"	275	---	"	---	200	±6
0405	"	"	350	---	±12	---	310	±10
027	"	"	---	17	±5	31	---	±5
0410	"	"	---	19	"	36	---	"
0415	"	"	---	28	"	38	---	"
0420	"	"	---	28	"	45	---	"
0425	"	"	---	32	±9	54	---	±9
0430	"	"	---	40	±5	60	---	±5
0435	"	"	---	50	"	65	---	"
0440	"	"	---	62	"	77	---	"
0450	"	"	---	80	"	95	---	"
0451	"	"	---	85	"	95	---	"
0455	"	"	---	86	"	112	---	"
0460	"	"	---	86	"	120	---	"
0465	"	"	---	95	"	115	---	±7
0470	"	"	---	110	±8	130	---	±6
028	"	"	---	120	±5	130	---	±5
0475	"	"	---	120	"	140	---	"
0476	"	"	---	130	"	140	---	"
0480	"	"	---	120	"	160	---	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

TABLE I. Operating characteristics and dash numbers - Continued.

Dash number 1/ 2/	Configuration	Class	Open on increasing temperature	Open on decreasing temperature	Tolerance	Close on increasing temperature	Close on decreasing temperature	Tolerance
			°F	°F	°F	°F	°F	°F
0485	A1	4	---	125	±7	150	---	±5
0486	"	"	---	140	±5	150	---	±5
0490	"	"	---	130	±8	145	---	±6
0495	"	"	---	131	±5	151	---	±3
0496	"	"	---	145	"	155	---	±5
003	"	"	---	133	"	158	---	"
0500	"	"	---	135	"	175	---	"
0501	"	"	---	155	"	175	---	"
0505	"	"	---	138	±8	153	---	±6
0506	"	"	---	138	±5	153	---	±5
0507	"	"	---	144	±5	158	---	±5
0510	"	"	---	149	±8	165	---	±6
0515	"	"	---	150	±5	160	---	±5
0520	"	"	---	151	"	167	---	"
0523	"	"	---	165	"	185	---	"
0525	"	"	---	170	"	200	---	"
0530	"	"	---	174	"	194	---	"
0535	"	"	---	175	"	190	---	"
0540	"	"	---	176	"	185	---	"
0545	"	"	---	180	"	210	---	±6
0549	"	"	---	180	"	200	---	±5
0550	"	"	---	185	"	200	---	±5
0555	"	"	---	192	±5	219	---	±5
0560	"	"	---	200	±5	250	---	"
0565	"	"	---	230	±8	260	---	"
0580	"	"	60	---	±5	---	40	"
0590	"	"	77	---	"	---	72	"
0600	A2	"	80	---	"	---	60	"
0605	"	"	80	---	"	---	65	"
0610	"	"	90	---	"	---	75	"
0611	"	"	100	---	"	---	85	"
0615	"	"	120	---	"	---	111	"
0620	"	"	130	---	"	---	110	"
0625	"	"	131	---	"	---	116	±7
0630	"	"	140	---	"	---	105	±7
0635	"	"	145	---	"	---	130	±5
0636	"	"	145	---	"	---	135	"
0640	"	"	150	---	"	---	141	"
0645	"	"	158	---	"	---	140	"
0650	"	"	175	---	"	---	160	"
0655	"	"	181	---	"	---	165	"
0660	"	"	185	---	"	---	120	"
0665	"	"	212	---	±9	---	185	±9
0670	"	"	225	---	±8	---	150	±5
0675	"	"	239	---	±5	---	221	±5
0680	"	"	250	---	±8	---	220	±6

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

TABLE I. Operating characteristics and dash numbers - Continued.

Dash number 1/ 2/	Configuration	Class	Open on increasing temperature	Open on decreasing temperature	Tolerance	Close on increasing temperature	Close on decreasing temperature	Tolerance
			°F	°F	°F	°F	°F	°F
0684	A2	4	480	---	±25	---	420	±25
0685	"	"	---	45	±5	73	---	±5
0686	"	"	---	80	"	100	---	±5
0687	"	"	---	95	"	100	---	±5
0690	"	"	---	85	"	105	---	±7
0695	"	"	---	111	"	120	---	±5
0700	"	"	---	116	"	125	---	±5
0701	"	"	---	120	"	130	---	±5
0705	"	"	---	140	"	150	---	±7
0710	"	"	---	140	"	155	---	±5
0715	"	"	---	140	"	160	---	"
0720	"	"	---	145	"	160	---	"
0725	"	"	---	160	"	180	---	"
0730	"	"	---	170	"	185	---	"
0735	"	"	---	175	"	225	---	"
0736	"	"	---	240	"	255	---	"
0740	"	"	---	200	"	280	---	"
0800	A3	"	50	---	"	---	30	"
0805	"	"	80	---	"	---	55	"
001	"	3	158	---	"	---	140	"
0810	"	4	170	---	"	---	150	"
0815	"	"	170	---	"	---	140	"
0818	"	"	190	---	"	---	170	"
0820	"	"	197	---	"	---	177	"
0825	"	"	212	---	±8	---	176	"
0830	"	"	225	---	±10	---	195	±8
0835	"	"	230	---	±5	---	210	±5
002	"	3	239	---	±5	---	221	±5
0836	"	4	240	---	±5	---	227	±5
0840	"	"	248	---	±14	---	194	±10
0845	"	"	299	---	±8	---	280	±6
0850	"	"	302	---	±12	---	202	±6
0855	"	"	---	40	±10	60	---	±5
0860	"	"	---	100	"	120	---	±5
0865	"	"	---	105	"	120	---	±5
0870	"	"	---	149	"	158	---	±4
0871	"	"	---	130	"	160	---	±5
0872	"	"	---	140	"	165	---	"
0875	"	"	---	155	"	170	---	"
0876	"	"	---	150	"	175	---	"
0880	"	"	---	165	"	180	---	"
0881	"	"	---	155	"	185	---	"
0882	"	"	---	160	"	185	---	"
0883	"	"	---	165	"	195	---	"
0884	"	"	---	175	"	205	---	"
0885	"	"	---	180	±6	210	---	"
0886	"	"	---	185	±5	210	---	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

TABLE I. Operating characteristics and dash numbers - Continued.

Dash number 1/ 2/	Configuration	Class	Open on increasing temperature	Open on decreasing temperature	Tolerance	Close on increasing temperature	Close on decreasing temperature	Tolerance
			°F	°F	°F	°F	°F	°F
0887	A3	4	---	195	±5	220	---	±5
0888	"	"	---	200	±8	230	---	±8
0889	"	"	---	205	"	230	---	"
0891	"	"	---	210	"	240	---	"
0892	"	"	---	220	"	250	---	"
0890	"	"	---	248	"	266	---	±6
0895	B	"	75	---	±5	---	55	±5
0900	"	"	100	---	±8	---	85	"
0905	"	"	125	---	±5	---	100	"
0910	"	"	160	---	±5	---	40	"
0925	"	"	194	---	±15	---	175	±15
0935	"	"	212	---	±8	---	194	±5
0945	"	"	229	---	±3	---	199	±5
0948	"	"	275	---	±8	---	235	±6
0949	"	"	290	---	±8	---	250	±6
0950	"	"	350	---	±12	---	310	±10
0955	"	"	420	---	±15	---	350	±10
0960	"	"	---	115	±5	130	---	±5
0965	"	"	---	173	±5	203	---	±5
0970	"	"	---	180	±5	200	---	±5
0975	"	"	---	215	±8	250	---	±8
0980	"	"	---	215	±8	245	---	±8
1100	B1	"	25	---	±5	---	10	±5
1105	"	"	30	---	"	---	20	"
1110	"	"	43	---	"	---	28	"
1115	"	"	45	---	"	---	30	"
1116	"	"	50	---	"	---	30	"
1120	"	"	50	---	"	---	35	"
1121	"	"	50	---	"	---	40	"
1125	"	"	55	---	"	---	40	"
1135	"	"	60	---	"	---	40	±7
1140	"	"	65	---	"	---	50	±5
1145	"	"	70	---	"	---	40	±5
1150	"	"	70	---	"	---	55	±5
1155	"	"	75	---	"	---	35	±10
1159	"	"	77	---	"	---	37	±5
1160	"	"	78	---	"	---	58	±5
1165	"	"	80	---	"	---	70	"
1170	"	"	90	---	"	---	80	"
1175	"	"	95	---	"	---	60	"
1180	"	"	95	---	"	---	81	"
1185	"	"	95	---	"	---	85	"
1190	"	"	95	---	"	---	81	"
1195	"	"	99	---	"	---	90	"
1200	"	"	115	---	"	---	100	"
1205	"	"	115	---	±4	---	105	±4

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:28Z
Check the source to verify that this is the currentversion before use.

TABLE I. Operating characteristics and dash numbers - Continued.

Dash number 1/ 2/	Configuration	Class	Open on increasing temperature	Open on decreasing temperature	Tolerance	Close on increasing temperature	Close on decreasing temperature	Tolerance
			°F	°F	°F	°F	°F	°F
1210	B1	4	130	---	±5	---	115	±5
1215	"	"	135	---	"	---	120	"
1220	"	"	135	---	"	---	125	"
1225	"	"	140	---	"	---	120	"
1230	"	"	140	---	"	---	125	"
1235	"	"	145	---	"	---	135	±4
1240	"	"	150	---	"	---	130	±5
1245	"	"	150	---	"	---	135	±5
1250	"	"	155	---	"	---	100	±10
1255	"	"	155	---	"	---	140	±5
1260	"	"	158	---	"	---	138	±5
1265	"	"	160	---	"	---	120	±7
1270	"	"	160	---	"	---	140	±5
1275	"	"	160	---	"	---	150	"
006	"	"	164	---	"	---	149	"
1280	"	"	165	---	"	---	155	"
1290	"	"	170	---	"	---	130	±10
1295	"	"	172	---	"	---	159	±5
1296	"	"	175	---	"	---	150	"
1305	"	"	178	---	"	---	158	"
1310	"	"	180	---	"	---	160	"
1315	"	"	180	---	"	---	165	"
1320	"	"	185	---	"	---	175	"
1325	"	"	190	---	"	---	175	"
1330	"	"	190	---	"	---	180	"
1335	"	"	194	---	"	---	180	"
1340	"	"	196	---	"	---	176	"
1345	"	"	198	---	"	---	170	±7
1350	"	"	200	---	"	---	180	±5
1355	"	"	200	---	"	---	185	±5
1360	"	"	205	---	"	---	182	±7
1365	"	"	205	---	±6	---	230	±8
1370	"	"	207	---	±8	---	192	±5
1375	"	"	212	---	"	---	150	"
1380	"	"	215	---	"	---	195	"
1385	"	"	220	---	"	---	176	"
1395	"	"	220	---	"	---	200	"
1400	"	"	230	---	"	---	210	±6
1405	"	"	239	---	±6	---	180	±12
1410	"	"	239	---	±8	---	209	±6

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:28Z
Check the source to verify that this is the current version before use.

TABLE I. Operating characteristics and dash numbers - Continued.

Dash number 1/ 2/	Configuration	Class	Open on increasing temperature	Open on decreasing temperature	Tolerance	Close on increasing temperature	Close on decreasing temperature	Tolerance
			°F	°F	°F	°F	°F	°F
1415	B1	4	240	---	±8	---	220	±6
1420	"	"	240	---	"	---	230	"
1425	"	"	250	---	"	---	230	"
1430	"	"	260	---	"	---	230	"
1431	"	"	260	---	±5	---	248	±5
1435	"	"	274	---	±7	---	194	±15
1440	"	"	275	---	±7	---	245	±10
1445	"	"	280	---	±8	---	250	±6
1451	"	"	320	---	±7	---	305	±7
005	"	3	400	---	±10	---	350	±10
1455	"	4	---	32	±5	77	---	±5
1460	"	"	---	35	±5	50	---	"
1465	"	"	---	45	±5	55	---	"
1470	"	"	---	50	±6	65	---	"
1475	"	"	---	50	±5	68	---	"
1480	"	"	---	55	"	65	---	"
1495	"	"	---	68	"	95	---	"
1505	"	"	---	70	"	100	---	"
1510	"	"	---	70	"	105	---	"
1515	"	"	---	80	"	100	---	"
1520	"	"	---	85	"	95	---	"
1525	"	"	---	95	"	105	---	"
1530	"	"	---	105	"	120	---	"
1540	"	"	---	115	"	130	---	"
1550	"	"	---	140	"	160	---	"
1555	"	"	---	140	"	165	---	"
1285 4/	"	"	---	165	"	175	---	±4
1560	"	"	---	140	"	180	---	±5
1565	"	"	---	145	"	160	---	"
1575	"	"	---	156	±6	176	---	"
1580	"	"	---	174	±5	194	---	"
1581	"	"	---	185	"	195	---	"
1585	"	"	---	185	"	215	---	±6
1590	"	"	---	190	"	210	---	"
1595	"	"	---	200	"	250	---	"
1600	"	"	---	210	±8	240	---	"
1605	"	"	---	230	±8	265	---	"
1610	"	"	---	255	±8	300	---	"
1611	"	"	---	305	±10	330	---	±10
1700	B2	"	70	---	±5	---	61	±5
1705	"	"	160	---	"	---	140	"

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

TABLE I. Operating characteristics and dash numbers - Continued.

Dash number 1/ 2/	Configuration	Class	Open on increasing temperature	Open on decreasing temperature	Tolerance	Close on increasing temperature	Close on decreasing temperature	Tolerance
			°F	°F	°F	°F	°F	°F
1706	B2	4	162	---	±5	---	153	±5
031	"	"	200	---	±5	---	180	±5
1710	"	"	248	---	±8	---	218	±6
1715	"	"	255	---	±8	---	220	±6
1720	"	"	325	---	±12	---	285	±6
1723	"	"	482	---	±25	---	420	±25
1725	"	"	---	75	±5	125	---	±5
1730	"	"	---	96	±5	110	---	±5
1735	"	"	---	125	±5	140	---	±5
1755	"	"	---	240	±8	260	---	±6
030	"	"	---	145	±5	160	---	±5
1800	B3	"	75	---	±8	---	55	±5
1805	B3	"	252	---	±9	---	203	±9
1810	B3	"	325	---	±12	---	275	±12

1/ Dash number 007 has been superseded by dash ELKLG.
2/ Dash number 008 has been superseded by dash FPFQF.
3/ Dash numbers 025 and 029 were interchangeable, therefore 029 has been deleted.
4/ Dash number 1285 has been relocated to correct operating characteristics.

TABLE II. Configuration and contact action

Contact action	Configuration								
	A	A1	A2	A3	B	B1	B2	B3	B4
Open on increasing temperature	A	C	E	G	J	L	N	Q	S
Open on decreasing temperature	B	D	F	H	K	M	P	R	T
Close on decreasing temperature	A	C	E	G	J	L	N	Q	S
Close on increasing temperature	B	D	F	H	K	M	P	R	T

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:28Z
Check the source to verify that this is the current version before use.

TABLE III. Electrical ratings.

Load	Altitude			Life cycles
	Sea level		80,000 feet	
	28 V	115 V, 60 Hz	28 V	
	(amperes)	(amperes)	(amperes)	
Resistive	5.0	2.0	5.0	100,000
Inductive	2.5	1.0	2.5	100,000
Lamp	1.0	0.5	1.0	100,000
Low level ratings				
	30 millivolts dc 1/			
Resistive	10 milli-amperes			100,000

1/ Or 30 millivolts peak ac.

TABLE IV. Extent of qualification.

Configuration	Number of samples required	Tests	Qualifies
B-3	All per qualification table of MIL-S-24236	Complete per qualification inspection of MIL-S-24236	All
A, A1 A2, B B1, B2, B4	Two each	Visual and mechanical	
A3	Two each	Visual and mechanical vibration, shock	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

TABLE V. Temperature setting to the nearest 25°F.

Temperature	Code	Temperature	Code	Temperature	Code
-75	A	125	J	325	S
-50	B	150	K	350	T
-25	C	175	L	375	U
0	D	200	M	400	V
25	E	225	N	425	W
50	F	250	P	450	X
75	G	275	Q	475	Y
100	H	300	R	500	Z

TABLE VI. Temperature setting to the nearest 5°F.

Units	Tolerance					
	±3°F	±5°F	±8°F	±10°F	±15°F	±25°F
-10	A	F	L	R	W	2
-5	B	G	M	S	X	3
0	C	H	N	T	Y	4
+5	D	J	P	U	Z	5
+10	E	K	Q	Y	1	6

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

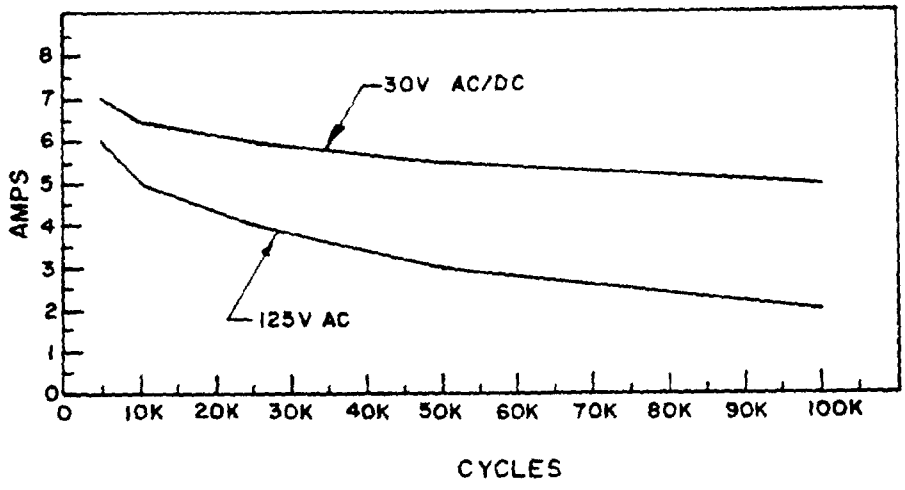


FIGURE 2. Life load chart

NOTE. Figure 2 is for use in determining approximate life and is provided for information only

Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians.
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS
Air Force - 17, 99
DLA - ES

User activities:
Army - AT, AV
Navy - AS, MC, OS
Air Force - 11, 19

Preparing activity.
Navy - EC

Agent:
DLA - ES

(Project 5930-1428-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.