
INCH-POUND
MIL-PRF-24236/1R
17 September 2019
SUPERSEDING
MIL-PRF-24236/1P
w/Amendment 2
24 September 2014

PERFORMANCE SPECIFICATION SHEET


SWITCHES, THERMOSTATIC, (BIMETALLIC), SUBMINIATURE, TYPE I, HERMETICALLY SEALED, SINGLE POLE, SINGLE THROW (SPST), 5 AMPERES, AND LOW LEVEL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-24236.

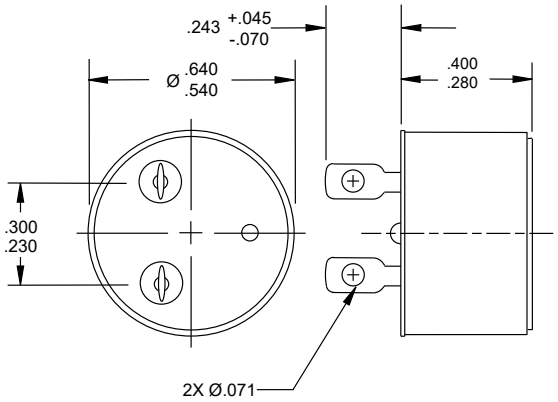


Configuration A (see note 6)

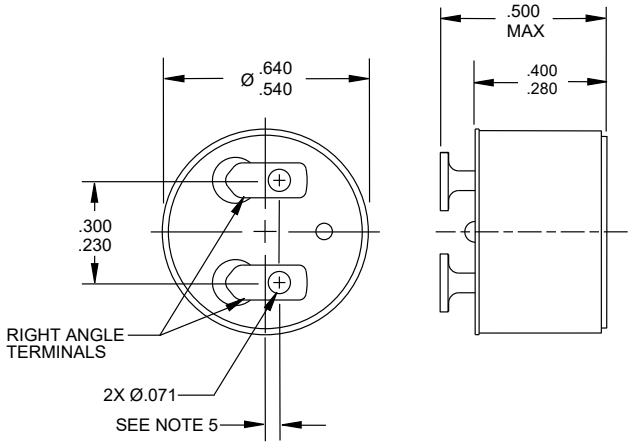


Configuration B (see note 6)

FIGURE 1. Switches, thermostatic, (bimetallic), subminiature, type I, hermetically sealed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

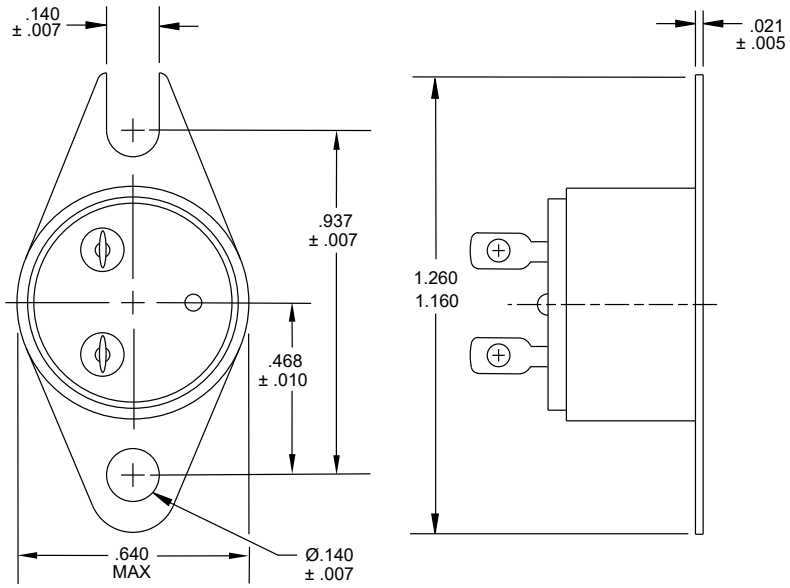


Configuration A1

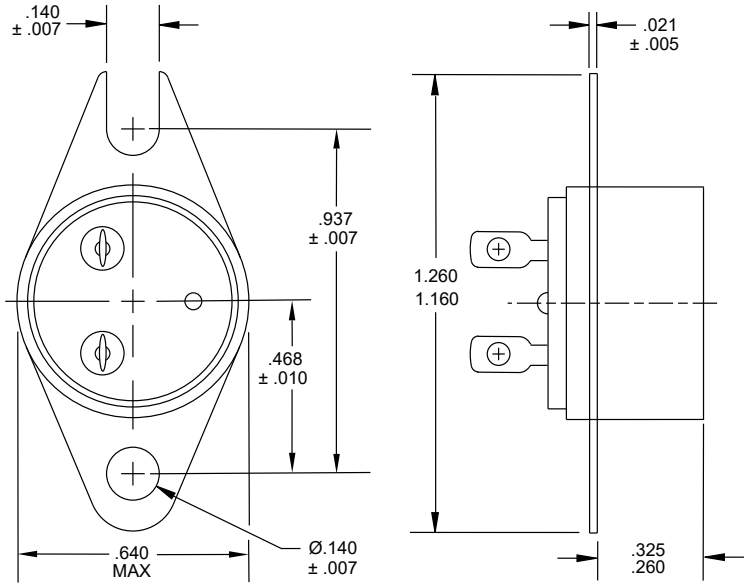

Configuration A2

FIGURE 1. Switches, thermostatic, (bimetallic), subminiature, type I, hermetically sealed - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

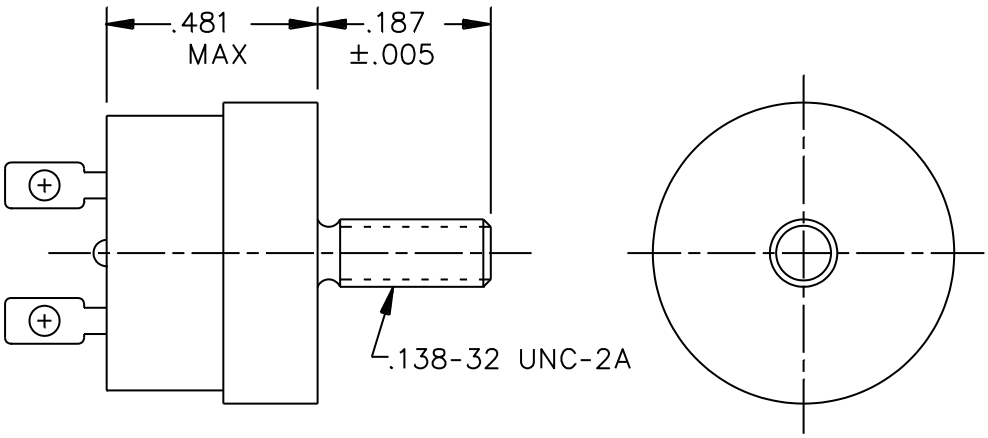


Configuration A3

FIGURE 1. Switches, thermostatic, (bimetallic), subminiature, type I, hermetically sealed - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

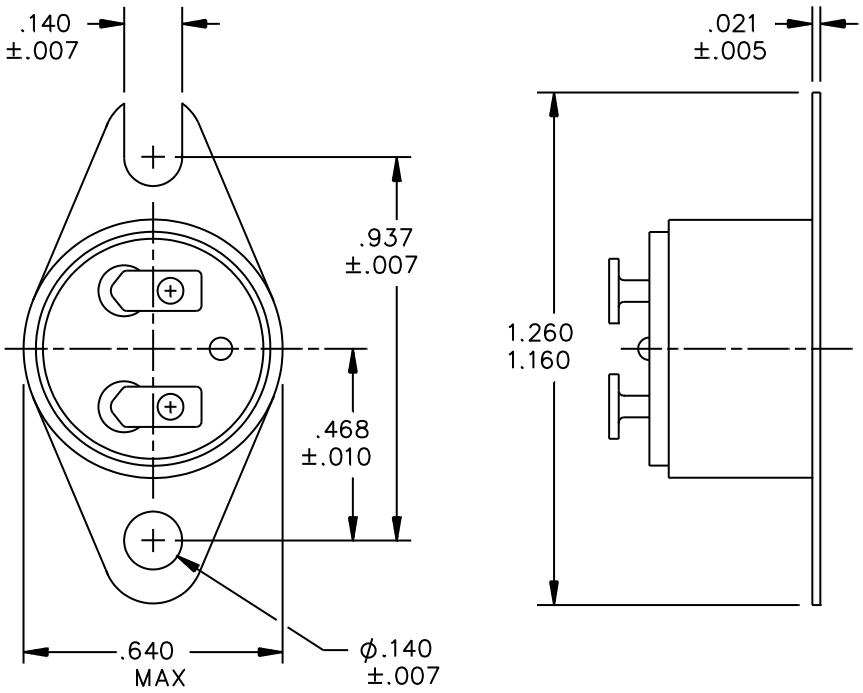


Configuration B1

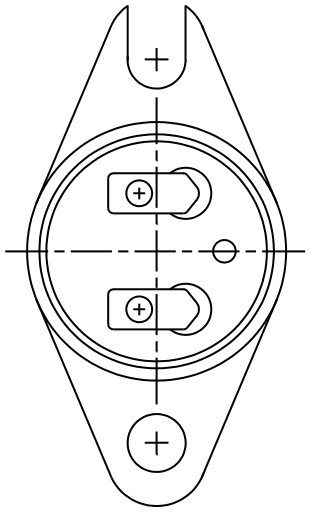


Configuration B1
Alternate View
See Note 4

FIGURE 1. Switches, thermostatic, (bimetallic), subminiature, type I, hermetically sealed - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

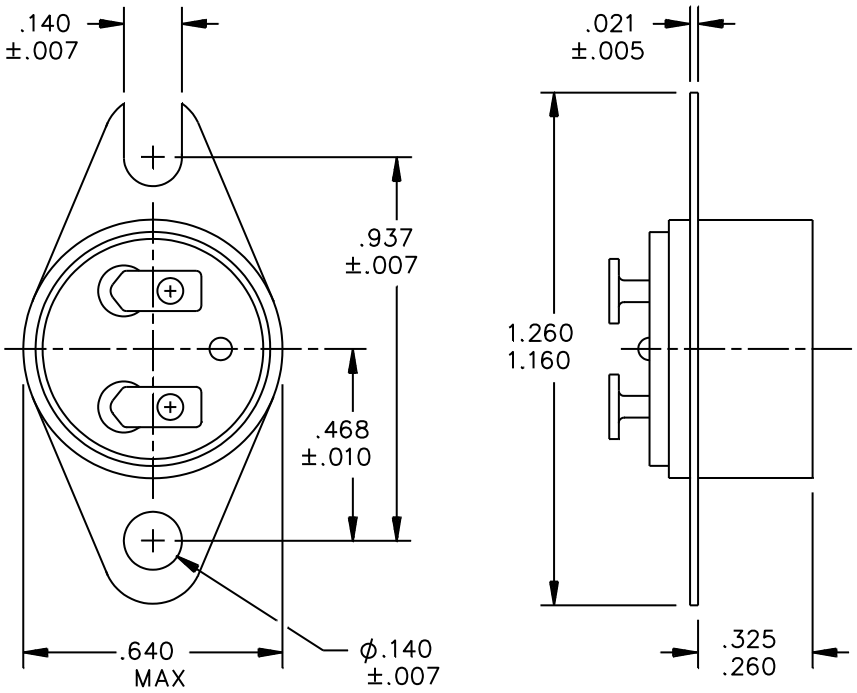


Configuration B2

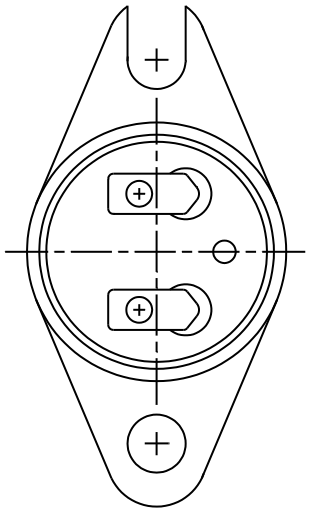

Configuration B2
Alternate View
See Note 4

FIGURE 1. Switches, thermostatic, (bimetallic), subminiature, type I, hermetically sealed - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

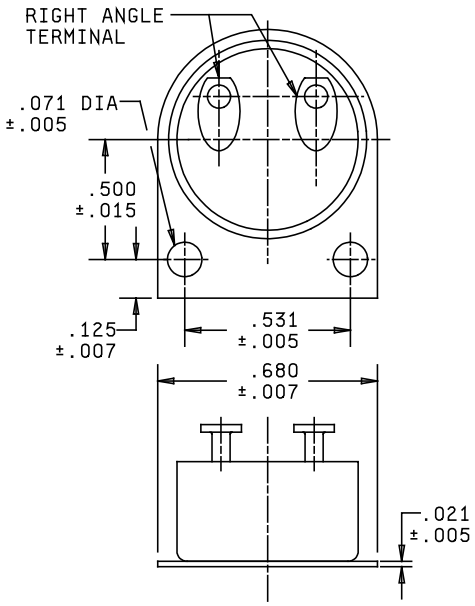


Configuration B3

FIGURE 1. Switches, thermostatic, (bimetallic), subminiature, type I, hermetically sealed - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

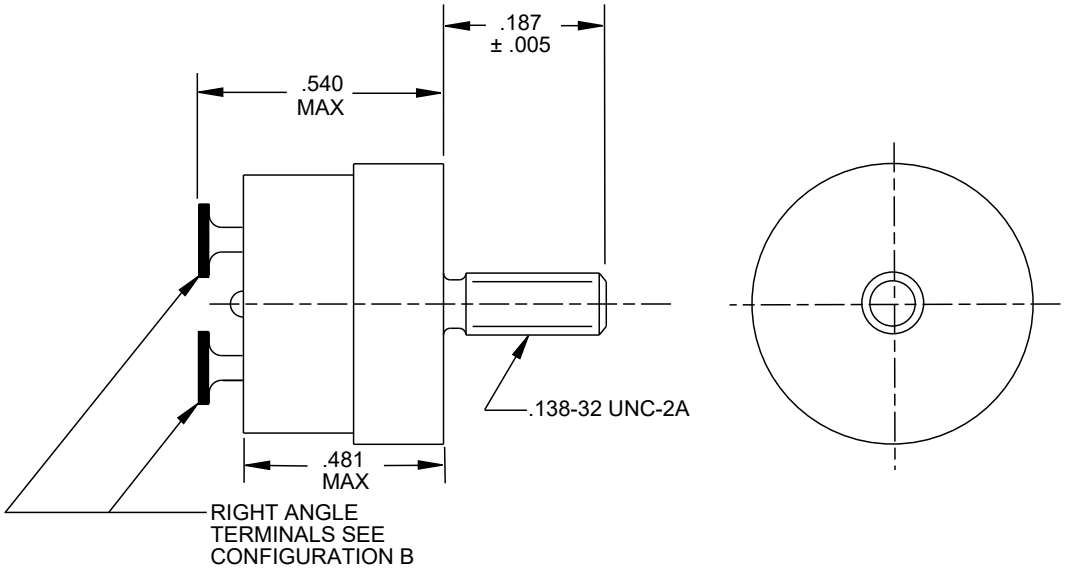


Configuration B4

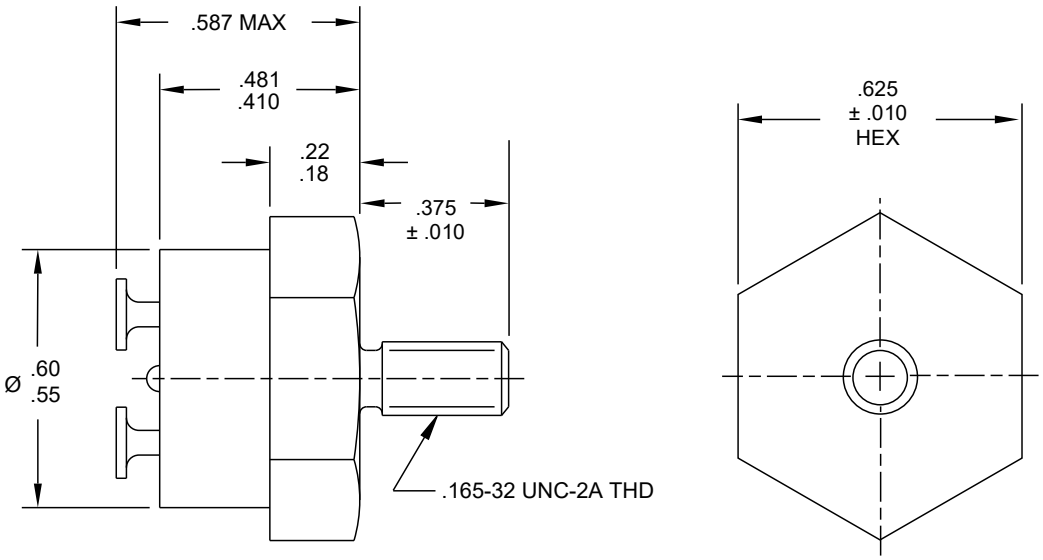


Configuration B5

FIGURE 1. Switches, thermostatic, (bimetallic), subminiature, type I, hermetically sealed - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

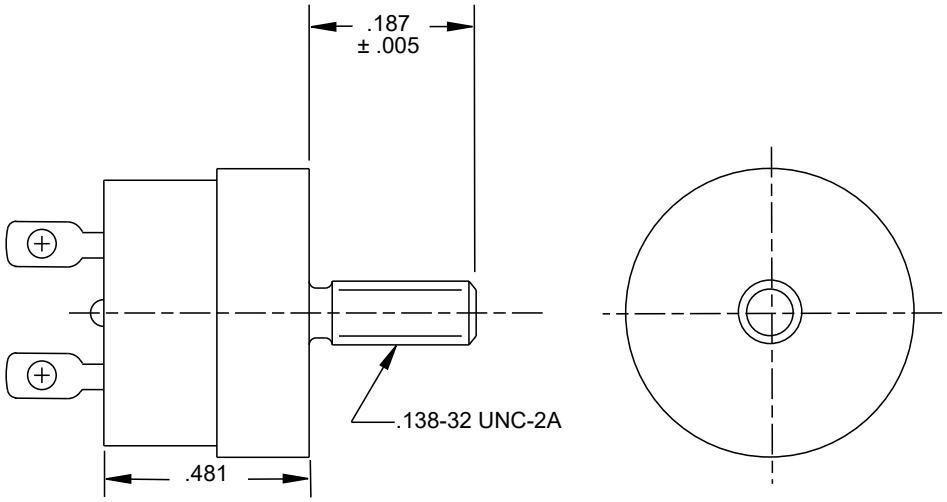


Configuration A4

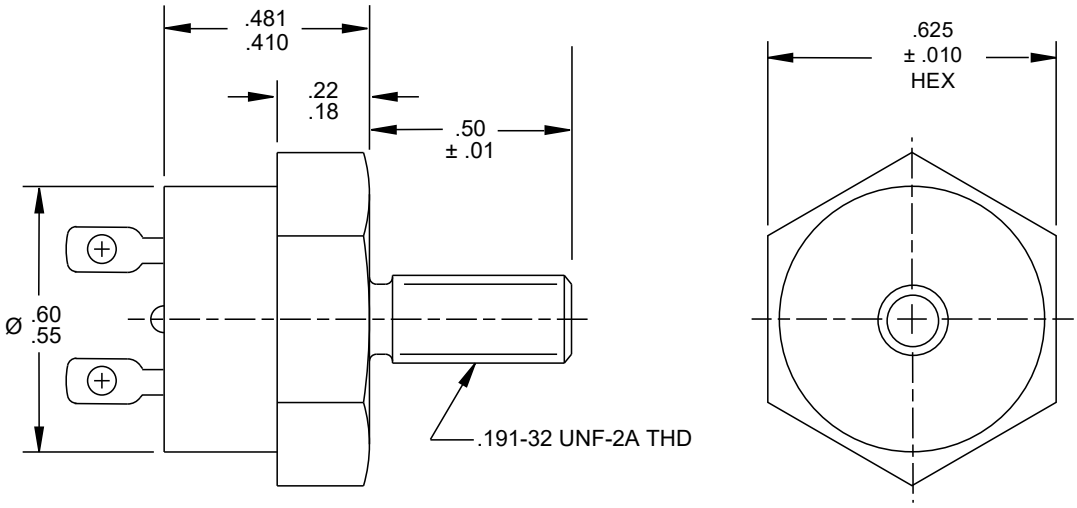


Configuration A5

FIGURE 1. Switches, thermostatic, (bimetallic), subminiature, type I, hermetically sealed - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

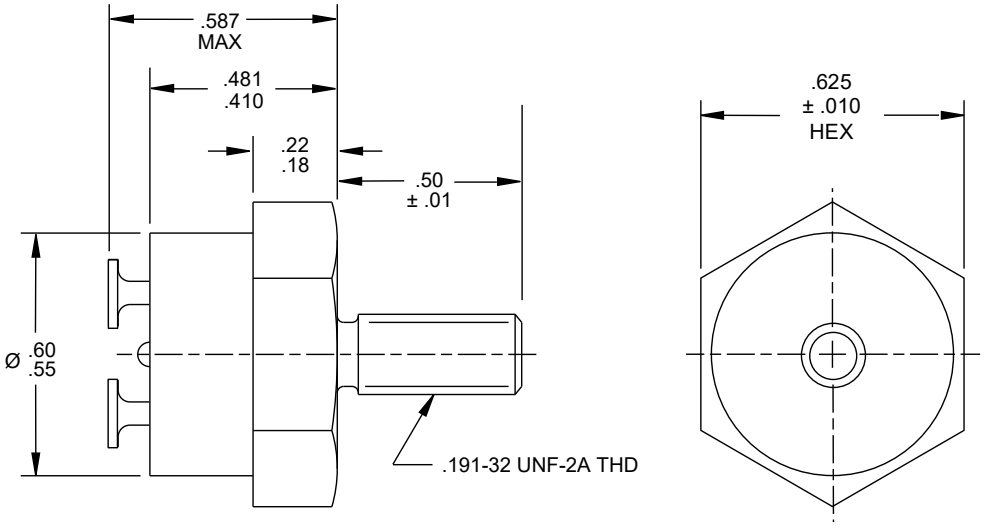


Configuration B6

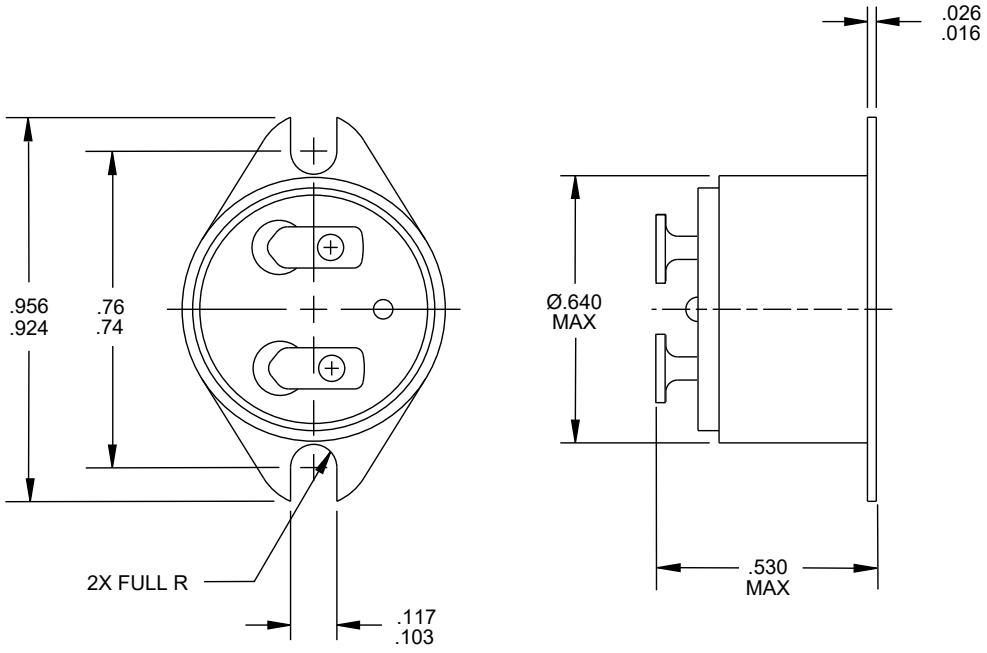


Configuration B7

FIGURE 1. Switches, thermostatic, (bimetallic), subminiature, type I, hermetically sealed - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

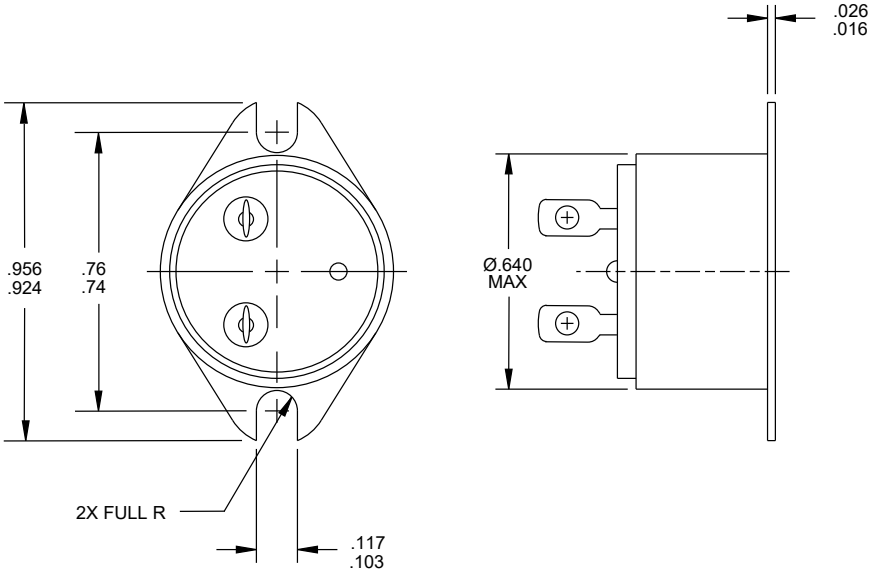


Configuration A6

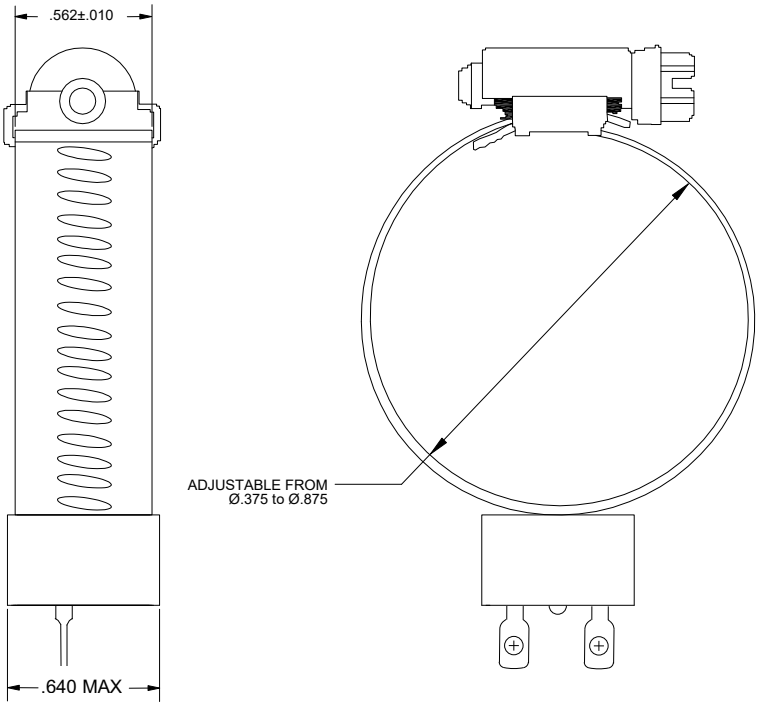

Configuration A7
Weight .07 pound Maximum

FIGURE 1. Switches, thermostatic, (bimetallic), subminiature, type I, hermetically sealed - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

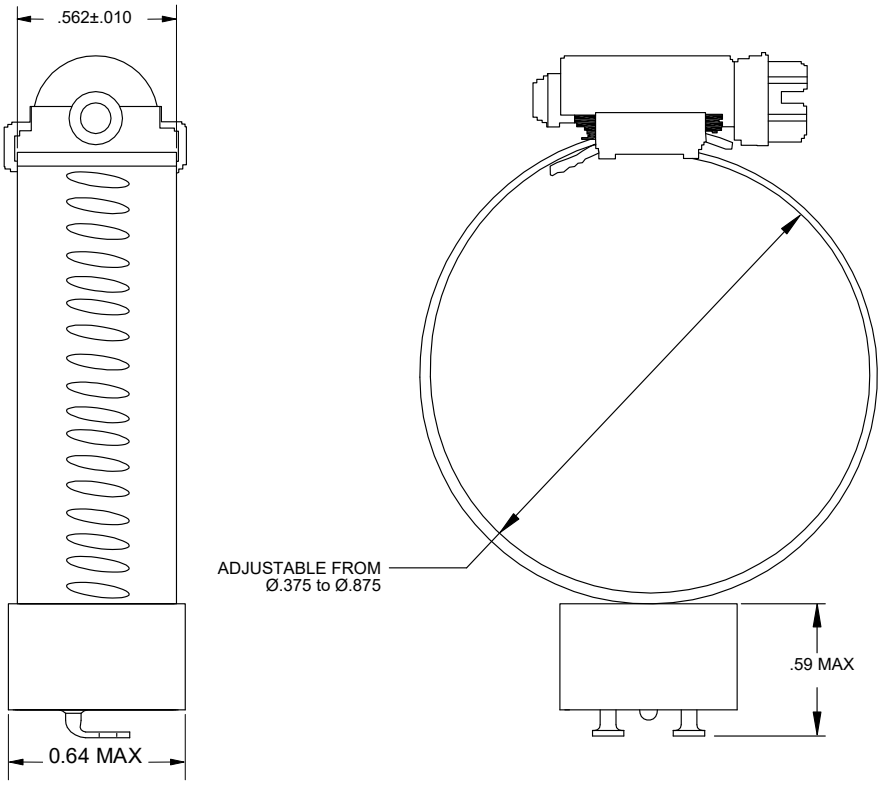


Configuration B8
Weight .07 pound Maximum

FIGURE 1. Switches, thermostatic, (bimetallic), subminiature, type I, hermetically sealed - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

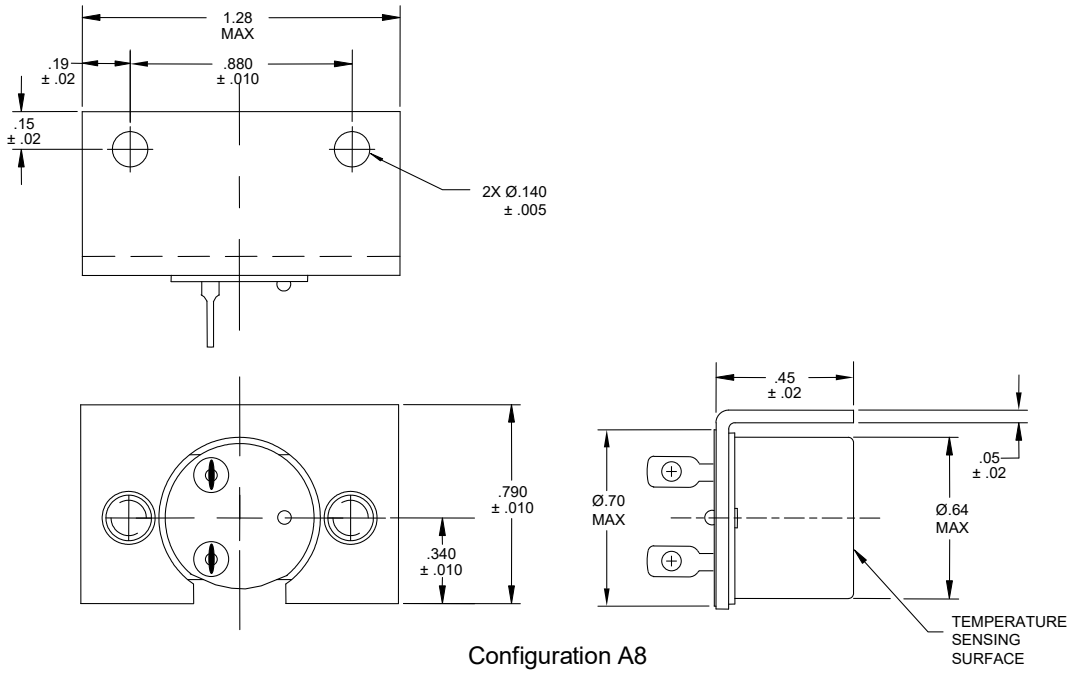

Configuration A8
Weight .05 pound Maximum

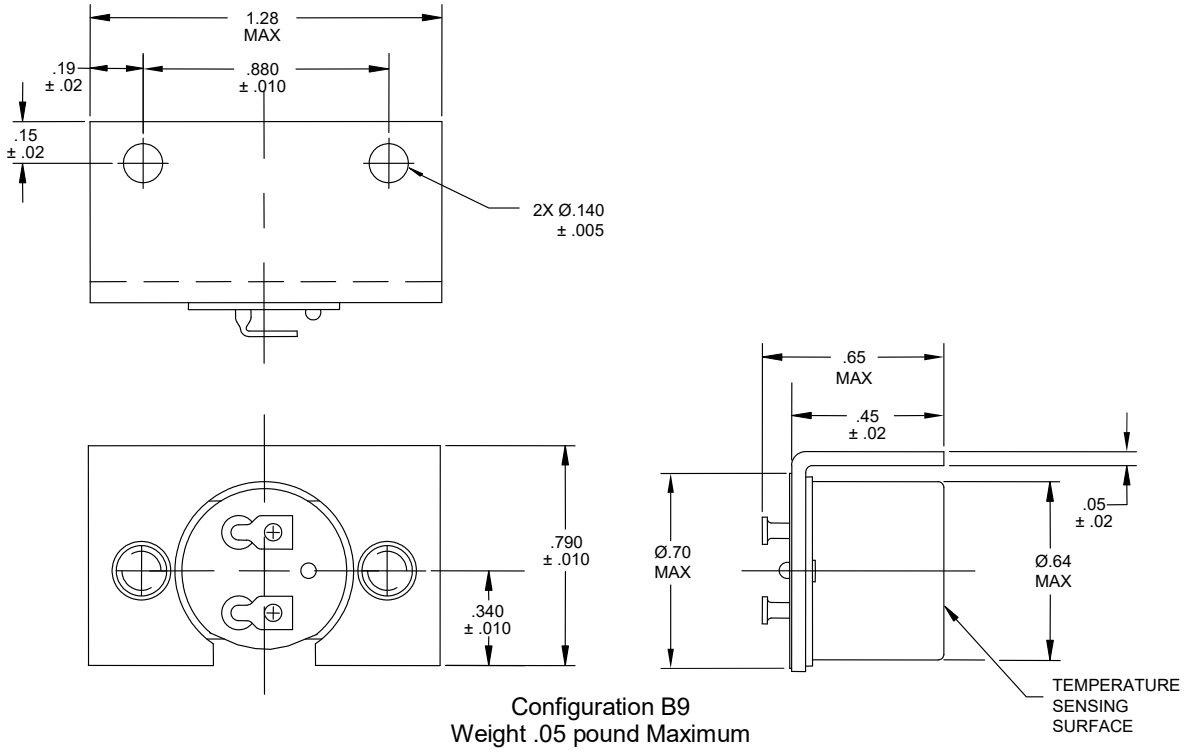

Configuration B9
Weight .05 pound Maximum

FIGURE 1. Switches, thermostatic, (bimetallic), subminiature, type I, hermetically sealed - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
0.005	0.13	0.15	3.81	0.41	10.41	0.65	16.51
0.007	0.18	0.18	4.57	0.45	11.43	0.68	17.27
0.01	0.25	0.187	4.75	0.468	11.89	0.7	17.78
0.015	0.38	0.19	4.83	0.481	12.22	0.74	18.8
0.016	0.4	0.22	5.59	0.5	12.7	0.76	19.3
0.02	0.51	0.23	5.84	0.53	13.46	0.79	20.07
0.021	0.53	0.243	6.17	0.531	13.49	0.875	22.23
0.045	1.14	0.26	6.6	0.54	13.72	0.88	22.35
0.05	1.27	0.28	7.11	0.55	13.97	0.924	23.47
0.07	1.78	0.3	7.62	0.562	14.28	0.937	23.8
0.071	1.8	0.325	8.25	0.587	14.91	0.956	24.28
0.103	2.62	0.34	8.64	0.59	14.99	1.16	29.46
0.117	2.97	0.375	9.53	0.6	15.24	1.26	32.00
0.125	3.18	0.400	10.16	0.625	15.88	1.28	32.51
0.14	3.56			0.64	16.26		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.015 (0.38 mm).
4. Exact shape of switch and terminals are optional provided dimensions specified are not exceeded.
5. This dimension not to exceed extended envelope of the switch.
6. Mounting brackets are not to be furnished.
7. Configurations D, D1, E, E1, F, and F1 formerly covered by this specification sheet are now covered by MIL-PRF-24236/20.
8. Configurations A1, A2, and A3 use basic switches of configuration A.
   Configurations B1, B2, and B3 use basic switches of configuration B.

FIGURE 1. Switches, thermostatic, (bimetallic), subminiature, type I, hermetically sealed - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Operating temperature range: -65°F to +500°F.

Class: Class 4, unless otherwise specified in table I, except 80,000 feet altitude.

Mounting: See tables I and II, and figure 1.

Weight: Not to exceed .025 pound unless otherwise stated.

Operating temperature and tolerances: See table I.

Electrical ratings: See table III.

Endurance test: See table III.


Insulation Resistance at High Temperatures: After exposure(s) above 300°F the insulation resistance between all insulated terminals and enclosures shall not be less than 30 megohms.

QUALIFICATION:

Single submission: Restricted to switch submitted.

Group submission: See table IV.

Part or Identifying Number (PIN): The PIN shall be selected either from table I which consists of M24236/1- (dash number from table I), or if required characteristics are not contained in this table, PINs shall be assigned as illustrated below:

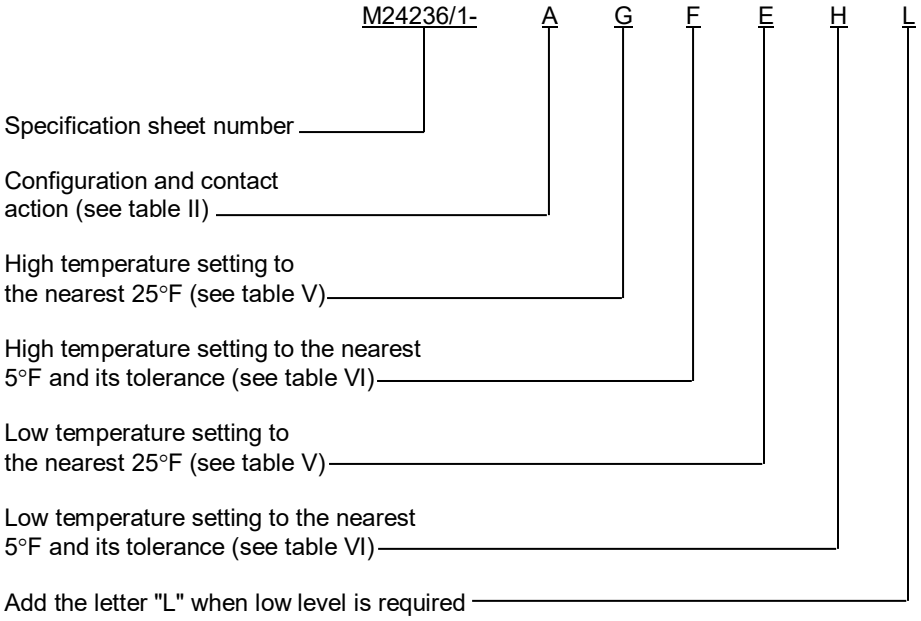

PIN M24236/1-AGFEHL identifies a temperature switch of configuration A which opens on increasing temperature at 65°F ±5°F and closes on decreasing temperature at 25°F ±5°F and has low level capabilities.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

TABLE I. Operating characteristics and dash numbers.

Dash number 1/ 2/	Config-uration	Class	Open on increasing temper-ature	Open on decreasing temper-ature	Toler-ance	Close on increasing temper-ature	Close on decreasing temper-ature	Toler-ance
			°F	°F	°F	°F	°F	°F
0100	A	4	60	---	±8	---	40	±5
0105	"	"	60	---	±5	---	35	±5
0110	"	"	70	---	±8	---	50	±5
0115	"	"	75	---	±8	---	45	±8
0120	"	"	80	---	±5	---	60	±7
0125	"	"	90	---	±8	---	70	±5
0130	"	"	115	---	±5	---	80	±7
0131	"	"	165	---	±5	---	145	±5
0132	"	"	180	---	±5	---	160	±5
0133	"	"	215	---	±5	---	195	±5
0135	"	"	---	150	±5	170	---	±7
0140	"	"	---	275	±10	325	---	±12
0200	A1	"	35	---	±5	---	15	±5
0205	"	"	37	---	±5	---	20	±5
0210	"	"	45	---	±5	---	32	±5
0214	"	"	50	---	±5	---	30	±5
0215	"	"	50	---	±5	---	35	±5
0220	"	"	50	---	±5	---	40	±5
0230	"	"	55	---	±5	---	40	±5
0235	"	"	55	---	±5	---	40	±5
0245	"	"	60	---	±5	---	50	±5
0250	"	"	60	---	±5	---	40	±5
0255	"	"	60	---	±5	---	45	±5
0260	"	"	65	---	±5	---	50	±5
0262	"	"	70	---	±5	---	40	±5
0265	"	"	75	---	±5	---	60	±5
0270	"	"	85	---	±5	---	65	±5
0275	"	"	95	---	±5	---	85	±5
0280	"	"	120	---	±5	---	100	±5
004	"	"	125	---	±5	---	110	±5
0281	"	"	125	---	±5	---	120	±5
0285	"	"	128	---	±5	---	112	±5
024	"	"	131	---	±3	---	120	±5
0290	"	"	135	---	±5	---	110	±10
0295	"	"	140	---	±5	---	130	±5
025 3/	"	"	145	---	±5	---	135	±5
0300	"	"	147	---	±5	---	132	±5
0304	"	"	150	---	±5	---	120	±5
0305	"	"	150	---	±5	---	135	±5
0306	"	"	150	---	±5	---	140	±5
0310	"	"	155	---	±5	---	135	±5
0315	"	"	158	---	±5	---	123	±5
0320	"	"	158	---	±5	---	131	±5
0321	"	"	160	---	±5	---	140	±5

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

TABLE I. Operating characteristics and dash numbers - Continued.

Dash number 1/ 2/	Config-uration	Class	Open on increasing temper-ature	Open on decreasing temper-ature	Toler-ance	Close on increasing temper-ature	Close on decreasing temper-ature	Toler-ance
			°F	°F	°F	°F	°F	°F
026	A1	4	160	---	±3	---	150	±5
0325	"	"	160	---	±5	---	145	±5
0329	"	"	170	---	±5	---	158	±5
0330	"	"	167	---	±5	---	158	±5
0331	"	"	170	---	±5	---	160	±5
0335	"	"	173	---	±3	---	149	±5
0336	"	"	173	---	±5	---	158	±5
0340	"	"	176	---	±5	---	160	±5
0345	"	"	180	---	±5	---	135	±5
0350	"	"	180	---	±5	---	170	±5
0355	"	"	185	---	±5	---	165	±5
0356	"	"	185	---	±5	---	170	±5
0360	"	"	190	---	±5	---	170	±5
0365	"	"	194	---	±5	---	176	±5
0370	"	"	200	---	±5	---	160	±5
0371	"	"	200	---	±5	---	180	±5
0372	"	"	200	---	±5	---	185	±5
0375	"	"	210	---	±8	---	175	±5
0379	"	"	230	---	±5	---	205	±5
0380	"	"	212	---	±8	---	192	±5
0381	"	"	230	---	±5	---	220	±5
0383	"	"	250	---	±8	---	210	±8
032	"	"	235	---	±5	---	215	±5
0385	"	"	265	---	±8	---	180	±5
0390	"	"	270	---	±8	---	230	±6
0395	"	"	272	---	±8	---	220	±6
0400	"	"	275	---	±8	---	200	±6
0405	"	"	350	---	±12	---	310	±10
027	"	"	---	17	±5	31	---	±5
0410	"	"	---	19	±5	36	---	±5
0415	"	"	---	28	±5	38	---	±5
0420	"	"	---	28	±5	45	---	±5
0425	"	"	---	32	±9	54	---	±9
0430	"	"	---	40	±5	60	---	±5
0435	"	"	---	50	±5	65	---	±5
0440	"	"	---	62	±5	77	---	±5
0450	"	"	---	80	±5	95	---	±5
0451	"	"	---	85	±5	95	---	±5
0455	"	"	---	86	±5	112	---	±5
0460	"	"	---	86	±5	120	---	±5
0465	"	"	---	95	±5	115	---	±7
0470	"	"	---	110	±8	130	---	±6
028	"	"	---	120	±5	130	---	±5
0475	"	"	---	120	±5	140	---	±5

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

TABLE I. Operating characteristics and dash numbers - Continued.

Dash number 1/ 2/	Config-uration	Class	Open on increasing temper-ature	Open on decreasing temper-ature	Toler-ance	Close on increasing temper-ature	Close on decreasing temper-ature	Toler-ance
			°F	°F	°F	°F	°F	°F
0476	A1	4	---	130	±5	140	---	±5
0480	"	"	---	120	±5	160	---	±5
0485	"	"	---	125	±7	150	---	±5
0486	"	"	---	140	±5	150	---	±5
0490	"	"	---	130	±8	145	---	±6
0495	"	"	---	131	±5	151	---	±3
0496	"	"	---	145	±5	155	---	±5
003	"	"	---	133	±5	158	---	±5
0500	"	"	---	135	±5	175	---	±5
0501	"	"	---	155	±5	175	---	±5
0505	"	"	---	138	±8	153	---	±6
0506	"	"	---	138	±5	153	---	±5
0507	"	"	---	144	±5	158	---	±5
0510	"	"	---	149	±8	165	---	±6
0515	"	"	---	150	±5	160	---	±5
0520	"	"	---	151	±5	167	---	±5
0523	"	"	---	165	±5	185	---	±5
0525	"	"	---	170	±5	200	---	±5
0530	"	"	---	174	±5	194	---	±5
0535	"	"	---	175	±5	190	---	±5
0540	"	"	---	176	±5	185	---	±5
0545	"	"	---	180	±5	210	---	±6
0549	"	"	---	180	±5	200	---	±5
0550	"	"	---	185	±5	200	---	±5
0555	"	"	---	192	±5	219	---	±5
0560	"	"	---	200	±5	250	---	±5
0565	"	"	---	230	±8	260	---	±5
0580	"	"	60	---	±5	---	40	±5
0590	"	"	77	---	±5	---	72	±5
0600	A2	"	80	---	±5	---	60	±5
0605	"	"	80	---	±5	---	65	±5
0610	"	"	90	---	±5	---	75	±5
0611	"	"	100	---	±5	---	85	±5
0615	"	"	120	---	±5	---	111	±5
0620	"	"	130	---	±5	---	110	±5
0625	"	"	131	---	±5	---	116	±7
0630	"	"	140	---	±5	---	105	±7
0635	"	"	145	---	±5	---	130	±5
0636	"	"	145	---	±5	---	135	±5
0640	"	"	150	---	±5	---	141	±5
0645	"	"	158	---	±5	---	140	±5
0650	"	"	175	---	±5	---	160	±5
0655	"	"	181	---	±5	---	165	±5
0660	"	"	185	---	±5	---	120	±5

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

TABLE I. Operating characteristics and dash numbers - Continued.

Dash number 1/ 2/	Config-uration	Class	Open on increasing temper-ature	Open on decreasing temper-ature	Toler-ance	Close on increasing temper-ature	Close on decreasing temper-ature	Toler-ance
			°F	°F	°F	°F	°F	°F
0665	A2	4	212	---	±9	---	185	±9
0670	"	"	225	---	±8	---	150	±5
0675	"	"	239	---	±5	---	221	±5
0680	"	"	250	---	±8	---	220	±6
0684	"	"	480	---	±25	---	420	±25
0685	"	"	---	45	±5	73	---	±5
0686	"	"	---	80	±5	100	---	±5
0687	"	"	---	95	±5	100	---	±5
0690	"	"	---	85	±5	105	---	±7
0695	"	"	---	111	±5	120	---	±5
0700	"	"	---	116	±5	125	---	±5
0701	"	"	---	120	±5	130	---	±5
0705	"	"	---	140	±5	150	---	±7
0710	"	"	---	140	±5	155	---	±5
0715	"	"	---	140	±5	160	---	±5
0720	"	"	---	145	±5	160	---	±5
0725	"	"	---	160	±5	180	---	±5
0730	"	"	---	170	±5	185	---	±5
0735	"	"	---	175	±5	225	---	±5
0736	"	"	---	240	±5	255	---	±5
0740	"	"	---	200	±5	280	---	±5
0800	A3	"	50	---	±5	---	30	±5
0805	"	"	80	---	±5	---	55	±5
001	"	3	158	---	±5	---	140	±5
0810	"	4	170	---	±5	---	150	±5
0815	"	"	170	---	±5	---	140	±5
0818	"	"	190	---	±5	---	170	±5
0820	"	"	197	---	±5	---	177	±5
0825	"	"	212	---	±8	---	176	±5
0830	"	"	225	---	±10	---	195	±8
0835	"	"	230	---	±5	---	210	±5
002	"	3	239	---	±5	---	221	±5
0836	"	4	240	---	±5	---	227	±5
0840	"	"	248	---	±14	---	194	±10
0845	"	"	299	---	±8	---	280	±6
0850	"	"	302	---	±12	---	202	±6
0855	"	"	---	40	±10	60	---	±5
0860	"	"	---	100	±10	120	---	±5
0865	"	"	---	105	±10	120	---	±5
0870	"	"	---	149	±10	158	---	±4
0871	"	"	---	130	±10	160	---	±5
0872	"	"	---	140	±10	165	---	±5
0875	"	"	---	155	±10	170	---	±5
0876	"	"	---	150	±10	175	---	±5

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

TABLE I. Operating characteristics and dash numbers - Continued.

Dash number 1/ 2/	Config-uration	Class	Open on increasing temper-ature	Open on decreasing temper-ature	Toler-ance	Close on increasing temper-ature	Close on decreasing temper-ature	Toler-ance
			°F	°F	°F	°F	°F	°F
0880	A3	4	---	165	±10	180	---	±5
0881	"	"	---	155	±10	185	---	±5
0882	"	"	---	160	±10	185	---	±5
0883	"	"	---	165	±10	195	---	±5
0884	"	"	---	175	±10	205	---	±5
0885	"	"	---	180	±6	210	---	±5
0886	"	"	---	185	±5	210	---	±5
0887	"	"	---	195	±5	220	---	±5
0888	"	"	---	200	±8	230	---	±8
0889	"	"	---	205	±8	230	---	±8
0891	"	"	---	210	±8	240	---	±8
0892	"	"	---	220	±8	250	---	±8
0890	"	"	---	248	±8	266	---	±6
0895	B	"	75	---	±5	---	55	±5
0900	"	"	100	---	±8	---	85	±5
0905	"	"	125	---	±5	---	100	±5
0910	"	"	160	---	±5	---	40	±5
0925	"	"	194	---	±15	---	175	±15
0935	"	"	212	---	±8	---	194	±5
0945	"	"	229	---	±3	---	199	±5
0948	"	"	275	---	±8	---	235	±6
0949	"	"	290	---	±8	---	250	±6
0950	"	"	350	---	±12	---	310	±10
0955	"	"	420	---	±15	---	350	±10
0960	"	"	---	115	±5	130	---	±5
0965	"	"	---	173	±5	203	---	±5
0970	"	"	---	180	±5	200	---	±5
0975	"	"	---	215	±8	250	---	±8
0980	"	"	---	215	±8	245	---	±8
1100	B1	"	25	---	±5	---	10	±5
1105	"	"	30	---	±5	---	20	±5
1110	"	"	43	---	±5	---	28	±5
1115	"	"	45	---	±5	---	30	±5
1116	"	"	50	---	±5	---	30	±5
1120	"	"	50	---	±5	---	35	±5
1121	"	"	50	---	±5	---	40	±5
1125	"	"	55	---	±5	---	40	±5
1135	"	"	60	---	±5	---	40	±7
1140	"	"	65	---	±5	---	50	±5
1145	"	"	70	---	±5	---	40	±5
1150	"	"	70	---	±5	---	55	±5
1155	"	"	75	---	±5	---	35	±10
1159	"	"	77	---	±5	---	37	±5
1160	"	"	78	---	±5	---	58	±5

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

TABLE I. Operating characteristics and dash numbers - Continued.

Dash number 1/ 2/	Config-uration	Class	Open on increasing temper-ature	Open on decreasing temper-ature	Toler-ance	Close on increasing temper-ature	Close on decreasing temper-ature	Toler-ance
			°F	°F	°F	°F	°F	°F
1165	B1	4	80	---	±5	---	70	±5
1170	"	"	90	---	±5	---	80	±5
1175	"	"	95	---	±5	---	60	±5
1180	"	"	95	---	±5	---	81	±5
1185	"	"	95	---	±5	---	85	±5
1190	"	"	95	---	±5	---	81	±5
1195	"	"	99	---	±5	---	90	±5
1200	"	"	115	---	±5	---	100	±5
1205	"	"	115	---	±4	---	105	±4
1210	"	"	130	---	±5	---	115	±5
1215	"	"	135	---	±5	---	120	±5
1220	"	"	135	---	±5	---	125	±5
1225	"	"	140	---	±5	---	120	±5
1230	"	"	140	---	±5	---	125	±5
1235	"	"	145	---	±5	---	135	±4
1240	"	"	150	---	±5	---	130	±5
1245	"	"	150	---	±5	---	135	±5
1250	"	"	155	---	±5	---	100	±10
1255	"	"	155	---	±5	---	140	±5
1260	"	"	158	---	±5	---	138	±5
1265	"	"	160	---	±5	---	120	±7
1270	"	"	160	---	±5	---	140	±5
1275	"	"	160	---	±5	---	150	±5
006	"	"	164	---	±5	---	149	±5
1280	"	"	165	---	±5	---	155	±5
1290	"	"	170	---	±5	---	130	±10
1295	"	"	172	---	±5	---	159	±5
1296	"	"	175	---	±5	---	150	±5
1305	"	"	178	---	±5	---	158	±5
1310	"	"	180	---	±5	---	160	±5
1315	"	"	180	---	±5	---	165	±5
1320	"	"	185	---	±5	---	175	±5
1325	"	"	190	---	±5	---	175	±5
1330	"	"	190	---	±5	---	180	±5
1335	"	"	194	---	±5	---	180	±5
1340	"	"	196	---	±5	---	176	±5
1345	"	"	198	---	±5	---	170	±7
1350	"	"	200	---	±5	---	180	±5
1355	"	"	200	---	±5	---	185	±5
1360	"	"	205	---	±5	---	182	±7
1365	"	"	205	---	±6	---	230	±8
1370	"	"	207	---	±8	---	192	±5
1375	"	"	212	---	±8	---	150	±5
1380	"	"	215	---	±8	---	195	±5

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

TABLE I. Operating characteristics and dash numbers - Continued.

Dash number 1/ 2/	Config-uration	Class	Open on increasing temper-ature	Open on decreasing temper-ature	Toler-ance	Close on increasing temper-ature	Close on decreasing temper-ature	Toler-ance
			°F	°F	°F	°F	°F	°F
1385	B1	4	220	---	±5	---	176	±5
1395	"	"	220	---	±5	---	200	±5
1400	"	"	230	---	±5	---	210	±6
1405	"	"	239	---	±6	---	180	±12
1410	"	"	239	---	±8	---	209	±6
1415	"	"	240	---	±8	---	220	±6
1420	"	"	240	---	±8	---	230	±6
1425	"	"	250	---	±8	---	230	±6
1430	"	"	260	---	±8	---	230	±6
1431	"	"	260	---	±5	---	248	±5
1435	"	"	274	---	±7	---	194	±15
1440	"	"	274	---	±7	---	245	±10
1445	"	"	280	---	±8	---	250	±6
1451	"	"	320	---	±7	---	305	±7
005	"	3	400	---	±10	---	350	±10
1455	"	4	---	32	±5	77	---	±5
1460	"	"	---	35	±5	50	---	±5
1465	"	"	---	45	±5	55	---	±5
1470	"	"	---	50	±6	65	---	±5
1475	"	"	---	50	±5	68	---	±5
1480	"	"	---	55	±5	65	---	±5
1495	"	"	---	68	±5	95	---	±5
1505	"	"	---	70	±5	100	---	±5
1510	"	"	---	70	±5	105	---	±5
1515	"	"	---	80	±5	100	---	±5
1520	"	"	---	85	±5	95	---	±5
1525	"	"	---	95	±5	105	---	±5
1530	"	"	---	105	±5	120	---	±5
1540	"	"	---	115	±5	130	---	±5
1550	"	"	---	140	±5	160	---	±5
1555	"	"	---	140	±5	165	---	±5
1285 4/	"	"	---	165	±5	175	---	±4
1560	"	"	---	140	±5	180	---	±5
1565	"	"	---	145	±5	160	---	±5
1575	"	"	---	156	±6	176	---	±5
1580	"	"	---	174	±5	194	---	±5
1581	"	"	---	185	±5	195	---	±7
1585	"	"	---	185	±5	215	---	±6
1590	"	"	---	190	±5	210	---	±6
1595	"	"	---	200	±5	250	---	±6
1600	"	"	---	210	±8	240	---	±6
1605	"	"	---	230	±8	265	---	±6
1610	"	"	---	255	±8	300	---	±6
1611	"	"	---	305	±10	330	---	±10

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

TABLE I. Operating characteristics and dash numbers - Continued.

Dash number 1/ 2/	Config-uration	Class	Open on increasing temper-ature	Open on decreasing temper-ature	Toler-ance	Close on increasing temper-ature	Close on decreasing temper-ature	Toler-ance
			°F	°F	°F	°F	°F	°F
1700	B2	4	70	---	±5	---	61	±5
1705	"	"	160	---	±5	---	140	±5
1706	"	"	162	---	±5	---	153	±5
031	"	"	200	---	±5	---	180	±5
1710	"	"	248	---	±8	---	218	±6
1715	"	"	255	---	±8	---	220	±6
1720	"	"	325	---	±12	---	285	±6
1723	"	"	482	---	±25	---	420	±25
1725	"	"	---	75	±5	125	---	±5
1730	"	"	---	96	±5	110	---	±5
1735	"	"	---	125	±5	140	---	±5
1755	"	"	---	240	±8	260	---	±6
030	"	"	---	145	±5	160	---	±5
1800	B3	"	75	---	±8	---	55	±5
1805	"	"	252	---	±9	---	203	±9
1810	"	"	325	---	±12	---	275	±12

1/ Dash number 007 has been superseded by dash ELKLG.
2/ Dash number 008 has been superseded by dash FPFQF.
3/ Dash numbers 025 and 029 were interchangeable, therefore 029 has been deleted.
4/ Dash number 1285 has been relocated to correct operating characteristics.

TABLE II. Configuration and contact action.

Contact action	Configuration																		
	A	A1	A2	A3	A4	A5	A6	A7	A8	B	B1	B2	B3	B4	B5	B6	B7	B8	B9
Open on increasing temperature	A	C	E	G	U	W	Y	1	3	J	L	N	Q	S	5	7	9	11	13
Open on decreasing temperature	B	D	F	H	V	X	Z	2	4	K	M	P	R	T	6	8	10	12	14
Close on decreasing temperature	A	C	E	G	U	W	Y	1	3	J	L	N	Q	S	5	7	9	11	13
Close on increasing temperature	B	D	F	H	V	X	Z	2	4	K	M	P	R	T	6	8	10	12	14

TABLE III. Electrical ratings.

Load	Altitude			Life cycles
	Sea level		80,000 feet	
	28 V	115 V, 60 Hz	28 V	
	(amperes)	(amperes)	(amperes)	
Resistive	5.0	2.0	5.0	100,000
Inductive	2.5	1.0	2.5	100,000
Lamp	1.0	0.5	1.0	100,000
Low level ratings				
	30 millivolts dc 1/			
Resistive	10 milliamperes			100,000

1/ Or 30 millivolts peak ac.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

TABLE IV. Extent of qualification.

Configuration	Number of samples required	Tests	Qualifies
B3	All in accordance with qualification table of MIL-PRF-24236	Complete in accordance with qualification inspection of MIL-PRF-24236	All
A, A1, A2, A4, A5, A6, A7, A8 B, B1, B2 B4, B5, B6 B7, B8, B9	Two each	Visual and mechanical	
A3	Two each	Visual and mechanical Vibration, shock	

TABLE V. Temperature setting to the nearest 25°F.

Temperature	Code	Temperature	Code	Temperature	Code
-75	A	125	J	325	S
-50	B	150	K	350	T
-25	C	175	L	375	U
0	D	200	M	400	V
25	E	225	N	425	W
50	F	250	P	450	X
75	G	275	Q	475	Y
100	H	300	R	500	Z

TABLE VI. Temperature setting to the nearest 5°F.

Units	Tolerance					
	±3°F	±5°F	±8°F	±10°F	±15°F	±25°F
-10	A	F	L	R	W	2
-5	B	G	M	S	X	3
0	C	H	N	T	Y	4
+5	D	J	P	U	Z	5
+10	E	K	Q	V	1	6

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.

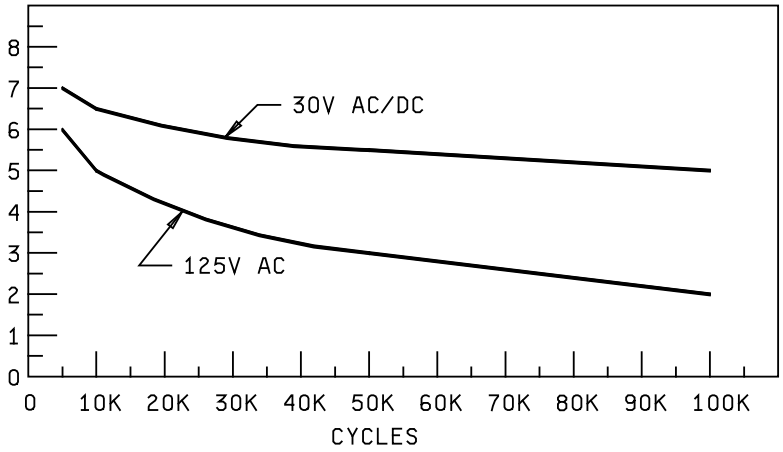


FIGURE 2. Life load chart.

NOTE: Figure 2 is for use in determining approximate life and is provided for information only.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced Documents:
MIL-PRF-24236
MIL-PRF-24236/20

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2019-039)

Review activities:
Army - AR, AT, AV, MI
Navy - AS, MC, OS
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:28Z
Check the source to verify that this is the current version before use.