NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


INCH-POUND
MIL-PRF-24236/2G
27 March 1992
SUPERSEDING
MIL-S-24236/2F
27 June 1978

PERFORMANCE SPECIFICATION SHEET

SWITCHES, THERMOSTATIC, (BIMETALLIC), TYPE I, SINGLE POLE, SINGLE THROW (SPST), 5 AMPERES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-PRF-24236

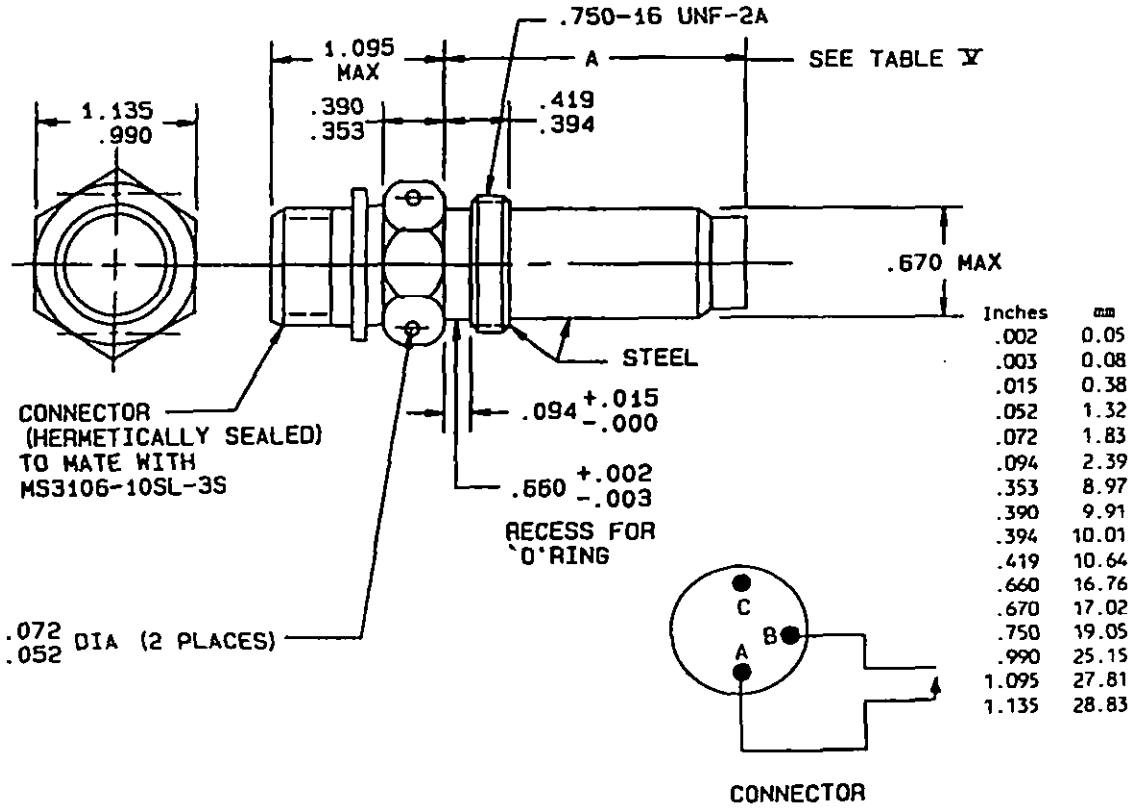


Inches	mm
.002	0.05
.003	0.08
.015	0.38
.052	1.32
.072	1.83
.094	2.39
.353	8.97
.390	9.91
.394	10.01
.419	10.64
.660	16.76
.670	17.02
.750	19.05
.990	25.15
1.095	27.81
1.135	28.83

FIGURE 1. Switches, thermostatic, (bimetallic), type I.

Ⓖ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:29Z
Check the source to verify that this is the current version before use.

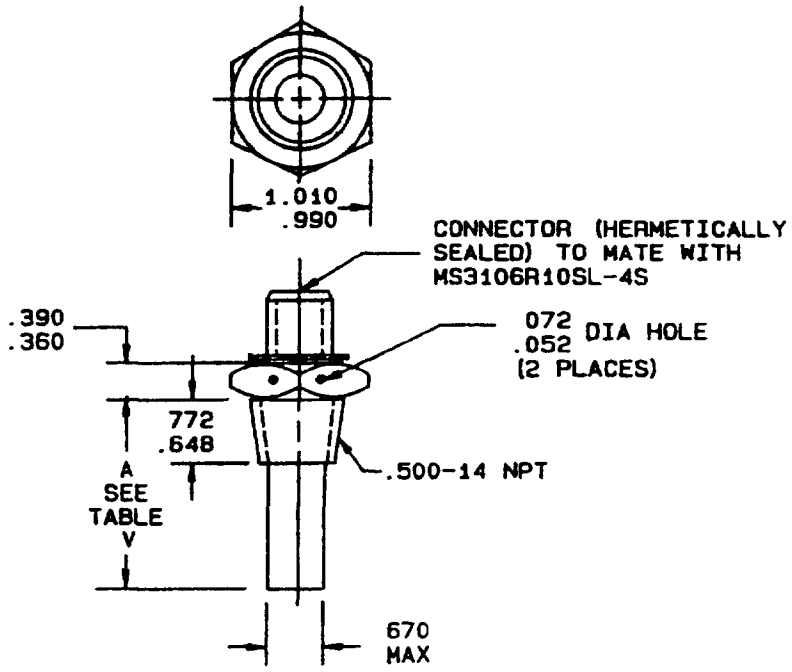


Inches	mm
052	1.32
072	1 83
.360	9.14
.390	9.91
500	12 70
648	16 46
670	17.02
772	19.61
990	25 15
1 010	25 65

CONFIGURATION 2

FIGURE 1 Switches, thermostatic, (bimetallic), type I - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:29Z
Check the source to verify that this is the current version before use.

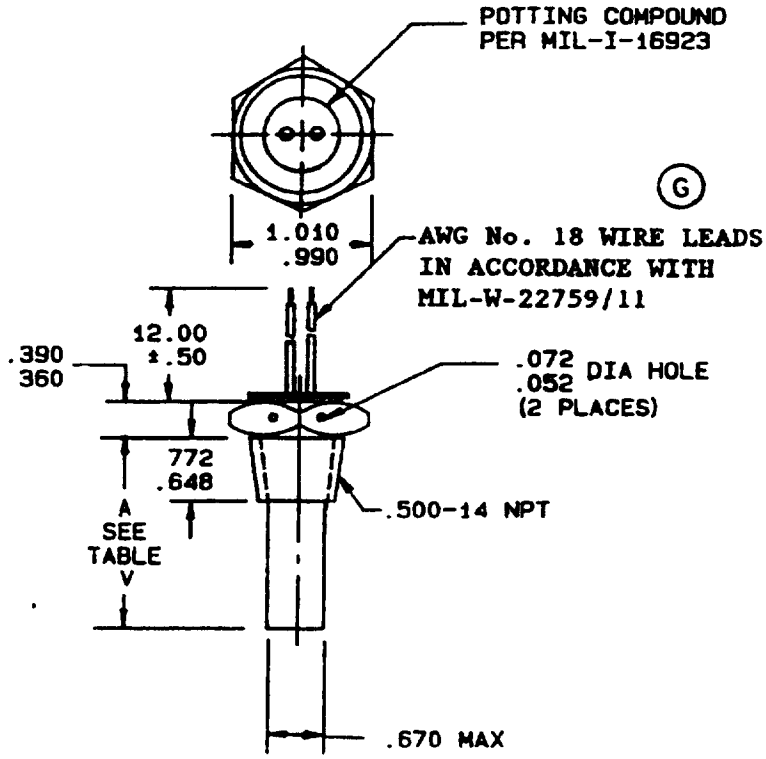


Inches	mm
.052	1.32
072	1 83
.360	9 14
.390	9 91
500	12 70
648	16 46
.670	17.02
.772	19 61
.990	25 15
1.010	25 65
12.00	304 8

CONFIGURATION 3

FIGURE 1 Switches, thermostatic, (bimetallic), type I - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:29Z
Check the source to verify that this is the current version before use.

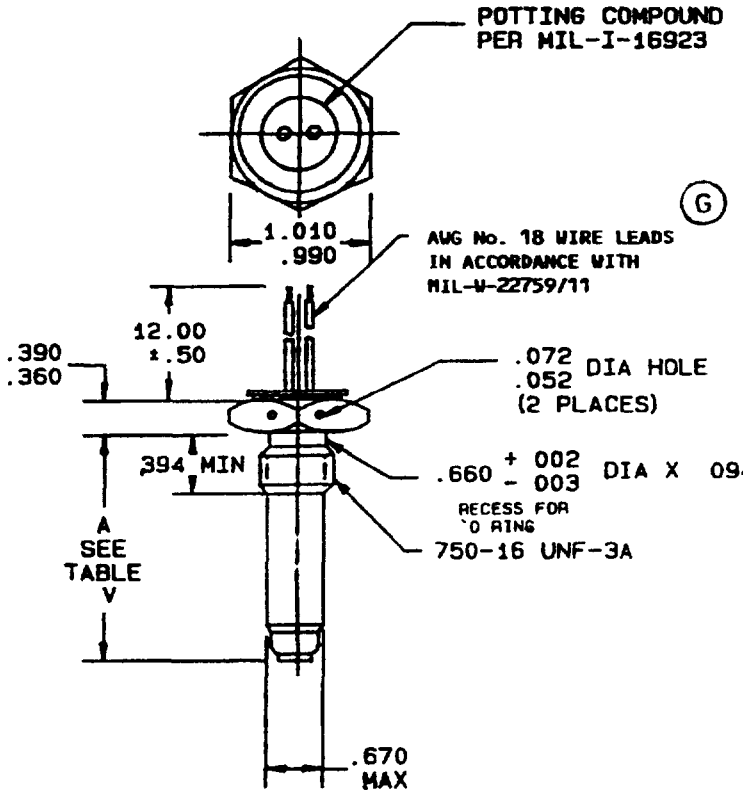


Inches	mm
002	0 05
003	0 08
.015	0.38
.052	1 32
.072	1.83
.094	2 39
.360	9 14
390	9 91
.394	10 01
.50	12 7
.660	16 76
.670	17.02
750	19 05
.990	25.15
1 010	25 65
12.00	304.8

CONFIGURATION 4

FIGURE 1 Switches, thermostatic, (bimetallic), type I - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:29Z
Check the source to verify that this is the current version before use.

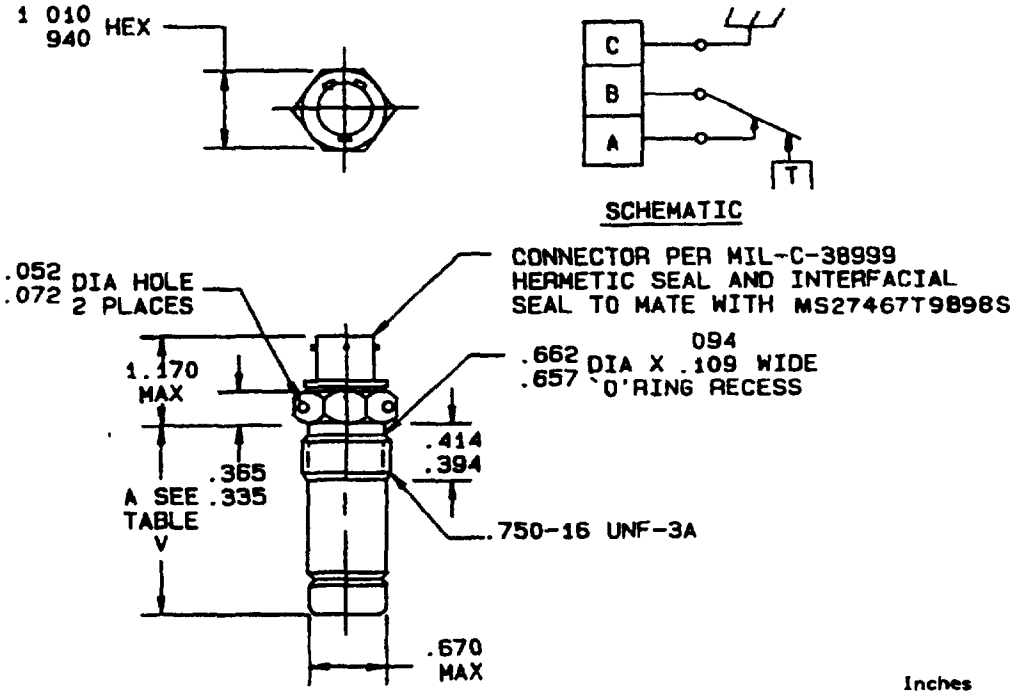

CONFIGURATION 5

Inches	mm
052	1.32
072	1.83
094	2 39
.109	2.77
335	8.51
365	9 27
.394	10.01
.414	10.52
657	16.69
662	16.81
.670	17.02
.750	19.05
.940	23.88
1 010	25.65
1 170	29.72

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Do not use in applications where basic switch will be exposed to pressures over 250 psig

FIGURE 1 Switches, thermostatic (bimetallic), type I - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration. See figure 1 and table I

Operating temperature range -75°F to 500°F Exposure temperature -85°F to +500°F

Class 4, except 30 g's for configuration 5 only

Mounting See figure 1

Weight: Approximately .21 pound (95.26 grams)

Operating temperatures and tolerances See table II and III

Torque

Connector 8 foot-pounds

Switch mounting. 15 foot-pounds

Electrical ratings.

Figure 1, configurations 1 through 4. See table IV

Figure 1, configuration 5. 1/

Load: 2 amperes, resistive.

Intermediate current Applicable 25,000 cycles.

Low level. Applicable 50,000 cycles

Endurance See table IV


TABLE I Configuration and contact action

Configuration						Contact action
	1	2	3	4	5	
Code	A	C	E	G	J	Open on increasing temperature
Code	B	D	F	H	K	Close on increasing temperature
Code	A	C	E	G	J	Close on decreasing temperature
Code	B	D	F	H	K	Open on decreasing temperature

1/ Switches shall be subjected only to low level loads prior to delivery for use

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:29Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN) PIN shall be assigned as illustrated below

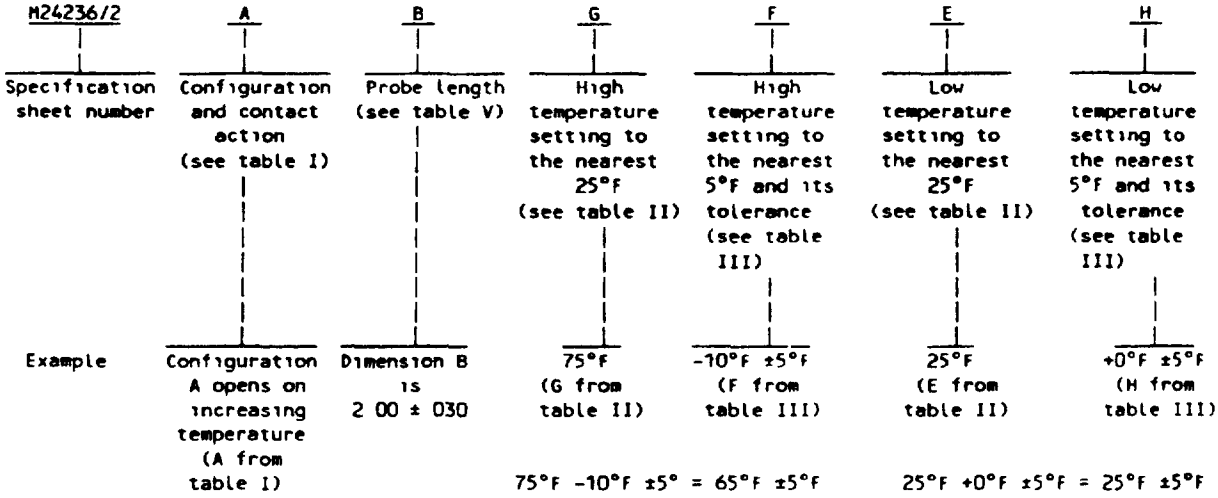

PIN M24236/2-ABGFEH identifies a temperature switch of configuration 1 with a 2 00 ± 030 inch probe length which opens on increasing temperature at 65°F ±5°F and closes on decreasing temperature at 25°F ±5°F

Qualification:

Group submission If basic switches are not qualified to MIL-S-24236/1, the entire qualification table of MIL-S-24236 applies If basic switches are qualified to MIL-S-24236/1, table VI applies

TABLE II Codes for temperature settings to within 25°F

Temperature	Code	Temperature	Code	Temperature	Code
-75	A	125	J	325	S
-50	B	150	K	350	T
-25	C	175	L	375	U
0	D	200	M	400	V
25	E	225	N	425	W
50	F	250	P	450	X
75	G	275	Q	475	Y
100	H	300	R	500	Z

TABLE III Codes for temperature to within 5°F

Units	Tolerance					
	±3°F	±5°F	±8°F	±10°F	±15°F	±25°F
-10	A	F	L	R	W	2
-5	B	G	M	S	X	3
0	C	H	N	T	Y	4
+5	D	J	P	U	Z	5
+10	E	K	Q	V	1	6

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:29Z
Check the source to verify that this is the current version before use.

TABLE IV Electrical ratings and endurance

Load	28 V (amperes)	115 V, 60 Hz (amperes)	Life cycles
Resistive	5 0	2 0	100,000
Inductive	2.5	1 0	100,000
Lamp	1.0	0 5	100,000

TABLE V. Probe length for figure 1, configurations 1 through 5

Code	Dimension A ± 030 (0 76)	
	Inches	mm
A	1 50	(38 1)
B	2 00	(50 8)
C	2.50	(63 5)
D	3.00	(76.2)
E	4.00	(101 6)

TABLE VI Group submission for switches containing qualified basic switches to MIL-S-24236/1

Configuration	Number of samples required	Tests	Extent of approval
1	3 each	Visual and mechanical examination Torque, vibration, shock and seal	All
2, 3, and 4	2 each	Torque, visual and mechanical	
5	4 each	Intermediate current, low level	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:29Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - AR, AT, AV
Air Force - 99
DLA - ES

User activities.
Navy - AS, MC, SH
Air Force - 17, 19

Preparing activity:
Navy - EC

Agent
DLA - ES

(Project 5930-1488)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:29Z
Check the source to verify that this is the current version before use.