
INCH-POUND
MIL-S-24235/19(SH)
21 August 1989
SUPERSEDING
DWG S6202-73937

MILITARY SPECIFICATION SHEET

STUFFING TUBES, METAL, AND PACKING ASSEMBLIES FOR ELECTRIC CABLES, SEALING PLUG FOR UNUSED STUFFING TUBES

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-24235.



SH 131868

FIGURE 1. Sealing plug. (01)

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances shall be as follows:
   Decimals - plus or minus 0.005 inch.
   Fractions - plus or minus 1/64 inch.
   Angular dimensions - plus or minus 30 minutes.

AMSC N/A FSC 5975
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil - Downloaded: 2026-10-19T20:26Z
Check the source to verify that this is the current version before use.

TABLE I. Sealing plug sizes.

Part or identifying number M24235/19	Tube size	Bar or NPS	DIM a	DIA b	DIM c	Part or identifying number M24235/19	Tube size	Bar or NPS	DIM a	DIA b	DIM c
-001	OC	1/ 3/16	1	7/16	1/8	-014	M	1	3	1-3/4	3/16
-002	OB	1/ 1/4	1	1/2	1/8	-015	N	1	3	1-27/32	3/16
-003	OA	1/ 5/16	1	9/16	1/8	-016	P	1	3	1-15/16	3/16
-004	A	1/ 3/8	1-5/8	5/8	1/8	-017	R	1-1/4	3	2-1/16	3/16
-005	B	1/ 1/2	1-5/8	3/4	1/8	-018	S	1-1/4	5	2-3/16	3/16
-006	C	1/4	1-5/8	7/8	1/8	-019	T	1-1/2	5	2-3/8	3/16
-007	D	3/8	1-5/8	31/32	1/8	-020	V	1-1/2	5	2-1/2	3/16
-008	E	3/8	1-5/8	1-1/32	1/8	-021	W	1-1/2	5	2-5/8	3/16
-009	F	3/8	1-5/8	1-1/16	1/8	-022	X	2	5	2-13/16	3/16
-010	G	1/2	1-5/8	1-3/16	1/8	-023	Y	2	5	2-15/16	3/16
-011	J	3/4	1-5/8	1-3/8	3/16	-024	Z	2	5	3-3/32	3/16
-012	K	3/4	3	1-1/2	3/16	-025	AA	2	3-5/16	3-3/16	3/16
-013	L	3/4	3	1-19/32	3/16						


1/ Round bar or rods only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:26Z
Check the source to verify that this is the current version before use.

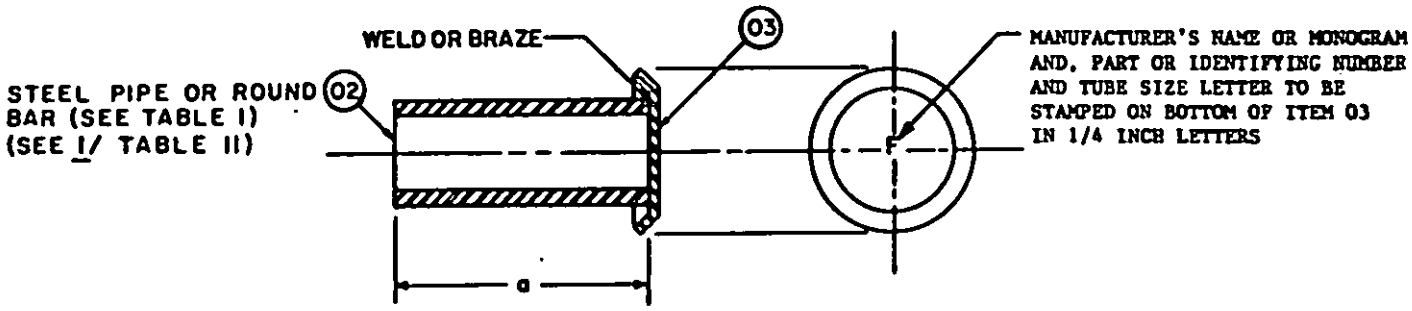

SH 131869

FIGURE 2. Plug assembly.

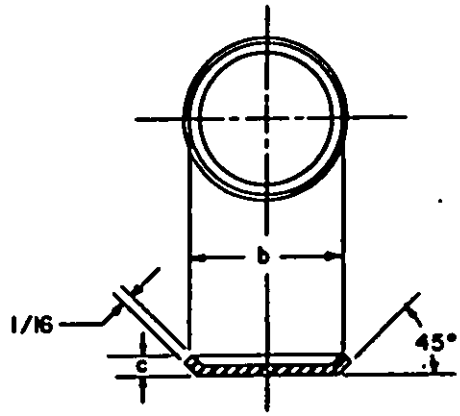

SH 131870

FIGURE 3. Disc. (03)

REQUIREMENTS:

1. Design:

   (a) See figures 1 through 3 and table I. Parts shall be assembled prior to machining to ensure proper alignment.
   (b) Items 2 and 3 may be made in one piece from solid rod in lieu of being a welded assembly.

2. Intended use: Sealing plugs covered herein are intended for use only where design changes necessitate elimination of cables in stuffing tubes already installed.

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:26Z
Check the source to verify that this is the current version before use.

TABLE II. Parts list.

Item no.	Description	Qty	Material and specification	Remarks
01	Sealing plug	-	---	See figures 1 and 2 and table I
02	Body	1	1/	See figure 2 and table I 2/
03	Disc	1	Steel, ASTM A 569, zinc plated	See figure 3 and table I 2/

1/ Body shall be steel rod in accordance with ASTM A 108, except that item 02 may be standard steel pipe type S of ASTM A 53 for size "C" through "AA" as an alternate. For nonmagnetic applications, plugs shall be brass or aluminum, respectively, to agree with brass or aluminum stuffing tubes (see MIL-S-24235).

2/ Steel parts after assembly shall be zinc plated in accordance with ASTM B 633.

Preparing activity:
Navy - SH
(Project 5975-N626-19)

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:26Z
Check the source to verify that this is the current version before use.