MILITARY SPECIFICATION

ALTIMETER SET, ELECTRONIC AN/APN-141(V)

This amendment forms a part of Military Specification MIL-A-23887A(WP) dated 1 December 1965 and has been approved by the Bureau of Naval Weapons, Department of the Navy.

Page 3, paragraph 3.3.9.1.1: Add

"These vibration tests shall be run three hours in each of the vertical and lateral directions with each sweep taking approximately fifteen minutes."

Page 3, paragraph 3.3.9.3: Delete and substitute

"3.3.9.3 Shock - The equipment shall not suffer damage or subsequently fail to provide the performances herein specified when subjected to 18 impact shocks of 15g having a time duration of 11±1 milliseconds and with the maximum "g" occuring at approximately 5-½ milliseconds; except that the Receiver-Transmitter, RF Switching Unit and Coupler must survive 18 impact shocks of 32 g having a time duration of 11±1 milliseconds when in operation. Operation during the 15g and 32 g shock application is not required, but must be resumed with no reduction in accuracy in less than 1.0 second after cessation of the shock load."

Page 4, paragraph 3.3.9.6.1: Add

"Component temperature shock tests shall be in accordance with Specification MIL-E-5272 Procedure I for one cycle only"

Page 6, paragraph 3.5.1.4.5, first sentence: Delete "AGS" and substitute

"Automatic Gain Stabilization (AGS)"

Page 10, paragraphs 3.5.5.4.1 and 3.5.5.4.2: Delete "Unit" after RT. (In four places)

Page 19, paragraph 6.10, under SPECIFICATIONS Military: Add

"MIL-E-5272 Environmental Testing, Aeronautical and Associated Equipment, General Specification for"

Page 22, Figure 3: Delete and substitute the new Figure 3. of this amendment.

FSC 5826

Source: https://assist.dla.mil -- Downloaded: 202610-19T18:12Z
Check the source to verify that this is the current version before use.

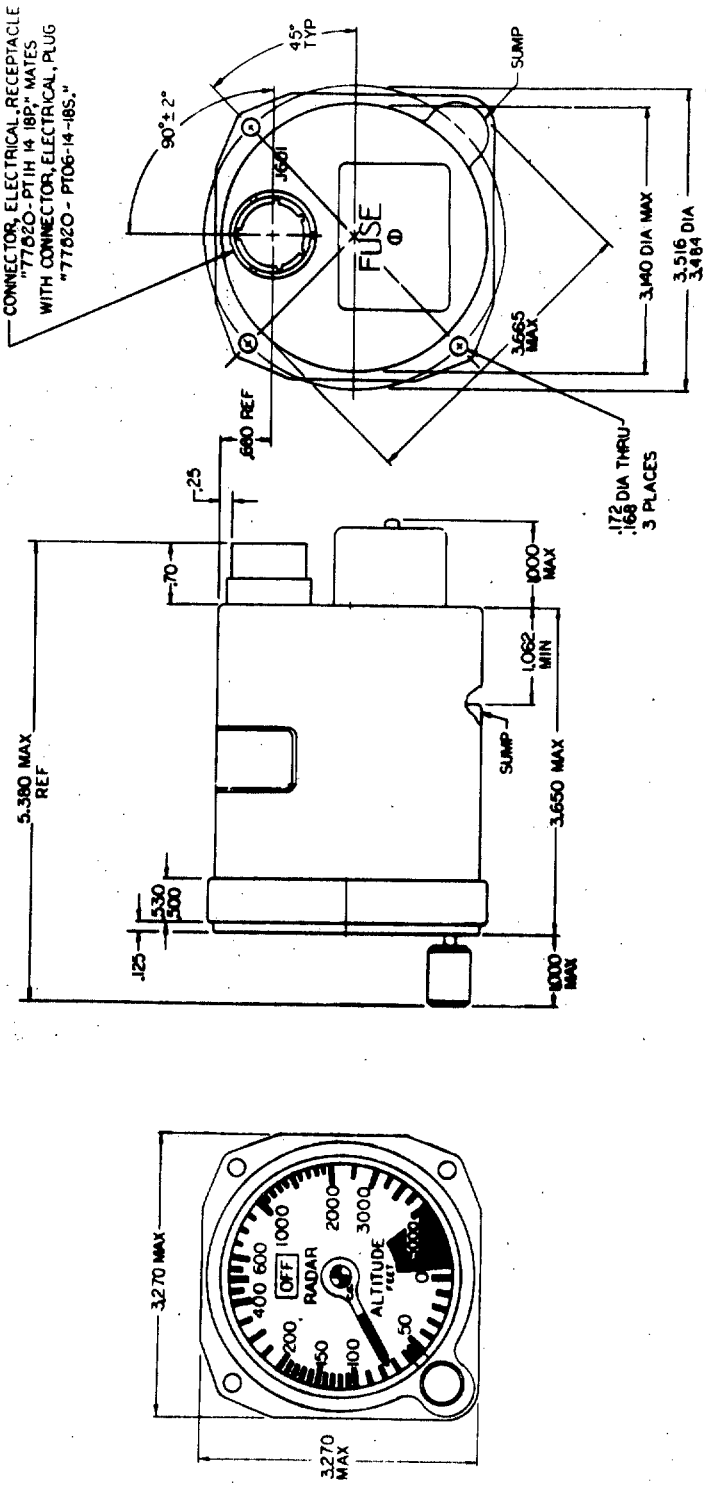


Figure 3. Indicator ID-881B/APN-141(V)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:12Z
Check the source to verify that this is the current version before use.