MIL-H-43210A

30 December 1968
SUPERSEDING
MIL-H-43210
17 March 1964

MILITARY SPECIFICATION

HARNESS, DOG LEADING (LEATHER)

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

* 1.1 This specification covers one type of adjustable, leather dog leading harness.

2. APPLICABLE DOCUMENTS

* 2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

KK-L-156	-	Leather, Cattlehide, Harness, Vegetable-Tanned.
QQ-P-416	-	Plating, Cadmium (Electrodeposited).
PPP-B-601	-	Boxes, Wood, Cleated-Plywood.
PPP-B-636	-	Box, Fiberboard.
PPP-F-320	-	Fiberboard, Corrugated and Solid, Sheet Stock (Container Grade) and Cut Shapes.

MILITARY

MIL-B-2505	-	Buckles, Center-Bar with Tongue.
MIL-R-2583	-	Rivets, Solid, Belt; and Washers, Flat (Burrs).
MIL-R-3390	-	Rings, Dee.

FSC 3770

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:55Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-147 - Palletized and Containerized Unit Loads 40" x 48" 4-Way (Partial) Pallet Skids, Runners, or Pallet-Type Base.

DRAWING

ARMY NATICK LABORATORIES

2-4-67 - Harness, Dog Leading (Leather) Assembly Complete.

(Miniature copy of Drawing 2-4-67, identified as figure 1, is attached for information purposes only.)

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

* 3.1 First article.- Unless otherwise specified (see 6.2), before production is commenced, a sample of the dog leading harness covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Materials.-

* 3.2.1 Leather.- The leather shall conform to type I or II, class 2 of KK-L-156. The color shall be russet and the thickness shall be as specified on Drawing 2-4-67.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:55Z
Check the source to verify that this is the current version before use.

* 3.2.2 Buckles, center bar.- All buckles shall be malleable iron conforming to type I, class 2, size 1 inch, of MIL-B-2505, cadmium plated in accordance with class 1, type I of QQ-P-416.

* 3.2.3 Rivets, belt and burrs.- The belt rivets and burrs shall conform to class B, size 9 of MIL-R-2583. The length of the rivets shall be such to provide a secure clinch.

* 3.2.4 Ring, dee.- The dee ring, 1 inch by 27/32 inch, shall conform to class 2, symbol E of MIL-R-3390, and shall be cadmium plated in accordance with class 1, type I of QQ-P-416.

3.3 Construction.- The construction shall conform to Drawing 2-4-67 and as specified herein.

3.3.1 Setting of belt rivets.- The belt rivets shall be securely set with the burrs on the outside of the harness.

3.4 Marking.- The letters "US", manufacturer's name, and year of manufacture shall be indented in the size characters and in the location shown on Drawing 2-4-67.

3.5 Workmanship.- Leather components shall be free of unspecified holes, cuts, tears, brand marks, grub holes, scar tissue, hip marks, brittle or bony areas, abrasions, scratches, flanky, spongy, or stretchy leather, or fat wrinkles. The leather shall be full grain or full grain lightly snuffed, and the flesh side shall be smooth and free from loose flesh. Buckles, rivets, and rings shall be free from rough edges.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 First article inspection.- When a preproduction sample is required, it shall be examined in accordance with table I and table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:55Z
Check the source to verify that this is the current version before use.

* 4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

* 4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.2 End product inspection.- The lot shall consist of all the completely fabricated harnesses offered for inspection at one time. The sample unit for this examination shall be one completely fabricated harness.

* 4.3.2.1 Visual examination.- The completely fabricated harnesses shall be examined for defects in table I. The inspection level shall be II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects expressed in terms of defects per hundred units.

* TABLE I.- Classification of defects for visual characteristics

Examine	Defect	Classification Major	Minor
Leather components			
Color	Not specified color.	X	
Quality	Not full grain or not full grain lightly snuffed.	X	
	Fat wrinkles.	X	
	Any hole, except where specified.	X	
	Any cut or rupture.	X	
	Brand mark, grub holes, scar tissue, hip mark, brittle, or bony area.	X	
	Abraded, scratched, or other grain damage.		X
	Flanky, spongy, or stretchy leather.	X	
Cleanness	Grease or oil stains.		X
General	Any leather component not fabricated of specified material.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:55Z
Check the source to verify that this is the current version before use.

* TABLE I.- Classification of defects for visual characteristics (cont'd)

Examine	Defect	Classification Major	Minor
Hardware	Incorrect finish.	X	
	Any hardware component broken or malformed.	X	
	Protecting finish omitted or corroded.	X	
	Burrs or sharp edges.	X	
Construction and workmanship	Any component part omitted.	X	
	Any component misplaced.	X	
	Any rivet or burr insecurely clinched.	X	
	Rivet inserted from wrong side, i.e., peened on underside of harness.		X
Marking	Omitted, incomplete, incorrect, illegible, not specified size, not in proper location, or not accomplished as specified.		X

* 4.3.2.2 Dimensional examination.- The completely fabricated harnesses shall be examined for defects in dimensions in table II. Any deviation from the specified requirements shall be classified as a defect. The inspection level shall be S-3 and the AQL shall be 4.0 expressed in terms of defects per hundred units.

* TABLE II.- Classification of defects for dimensional characteristics

Examine	Defect
Location and component dimensions	Under or over specified dimensions: by more than 1/8 inch on dimensions required to finish less than 3 inches. by more than 1/4 inch on dimensions required to finish more than 3 inches.
Thickness of shoulder, chest, body, and back straps	Thickness not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:55Z
Check the source to verify that this is the current version before use.

* 4.3.3 Examination of preparation for delivery requirements.- Examination shall be made to determine that packaging, packing, and marking requirements are in compliance with section 5 of this specification. Defects shall be scored in accordance with table III. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of shipping containers offered for inspection at one time. The inspection level shall be S-2 and the AQL shall be 2.5, expressed in terms of defects per hundred units.

* TABLE III.- Examination of preparation for delivery

Examine	Defect
Marking	Omitted; incorrect; illegible; or improper size, location, sequence, or method of application.
Materials	Any component missing. Any component damaged.
Workmanship	Bulging or distortion of containers.
Content	Number per container is more or less than required.

* 4.3.3.1 Examination of shipping container.- When shipping containers are required to be in accordance with PPP-B-636, examination for closure, waterproofing, and reinforcing shall be made in accordance with the appendix of that specification.

* 4.3.4 Examination of palletization.- An examination shall be made to determine that palletization is in compliance with section 5 of this specification. Defects shall be scored as specified in table IV. The sample unit for this examination shall be one palletized unit load ready for shipment. The lot shall be the number of palletized unit loads submitted for inspection at one time. The inspection level shall be S-1 with an AQL of 6.5, expressed in terms of defects per hundred units.

TABLE IV.- Examination of palletization

Examine	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirement.
Palletization	Not as specified. Pallet pattern not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:55Z
Check the source to verify that this is the current version before use.

TABLE IV.- Examination of palletization (cont'd)

Examine	Defect
Palletization (cont'd)	Interlocking of loads not as specified. Load not bonded with specified straps.
Weight	Exceeds maximum load limit.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

* 5.1.1 Level A.-

5.1.1.1 Unit packaging.- Each harness shall be unbuckled and identified.

5.1.1.2 Intermediate packaging.- Ten harnesses, alternated end for end, and top to bottom, shall be packaged flat in a fiberboard box conforming to grade W5c or W5s, style RSC of PPP-B-636. Inside dimensions of each fiberboard box shall be 19-1/2 inches in length, 10-1/2 inches in width, and 10 inches in depth. Box closure shall be in accordance with the appendix of the box specification.

* 5.1.2 Level C.- Each harness shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A.- Unless otherwise specified (see 6.2) harnesses, packaged as specified in 5.1, shall be packed in overseas type, style A of PPP-B-601, or in a fiberboard shipping container conforming to grade V2s, style RSC of PPP-B-636. Each shipping container shall be closed, waterproofed, and reinforced with flat strapping or tape banding in accordance with the appendix of the applicable container specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:55Z
Check the source to verify that this is the current version before use.

* 5.2.2 Level B.- Twenty harnesses, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to type CF or SF, variety SW, class domestic, grade 275, style RSC of PPP-B-636. Level A packages shall be packed flat two in length, one in width, and one in depth within a shipping container. Inside dimensions of each shipping container shall approximate 22-1/2 inches in length, 20-1/4 inches in width and 11 inches in depth. Approximate dimensions are furnished as a guide only. Residual quantities of less than twenty harnesses shall be packed in appropriate snug-fitting boxes conforming to PPP-B-636. Each shipping container shall be closed in accordance with method II as specified in the appendix of the box specification.

* 5.2.2.1 When specified (see 6.2) the fiberboard shipping container shall be grade V3c or V3s fiberboard box fabricated in accordance with PPP-B-636, and closed in accordance with the appendix of the box specification. The box material may also be grade V4s of PPP-F-320.

5.2.3 Level C.- Harnesses, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

* 5.3 Palletization.- Unless otherwise specified (see 6.2), harnesses packed as specified shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern intended to be used shall be submitted to and approved by the contracting officer prior to its use.

5.4 Marking.- In addition to any special marking required by the contract or order, each harness, intermediate box, shipping container and palletized load shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The dog harness covered by this specification is intended for use at dog training centers and military bases. The harness is adjustable and is equipped with a ring for attachment of a leash.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:55Z
Check the source to verify that this is the current version before use.

* 6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) First article.- When a preproduction sample is not required (see 3.1).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) Packing requirements when other than as specified (see 5.2.1).
(e) When weather resistant boxes are required for for level B shipments (see 5.2.2.1).
(f) When palletization is not required (see 5.3).

* 6.3 Asterisks.- The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Air Force - 84

Review activities:

Army - MD
Air Force - 84

User activity:


Navy - MC

Preparing activity:

Army - GL

Project No. 3770-0079

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:55Z
Check the source to verify that this is the current version before use.

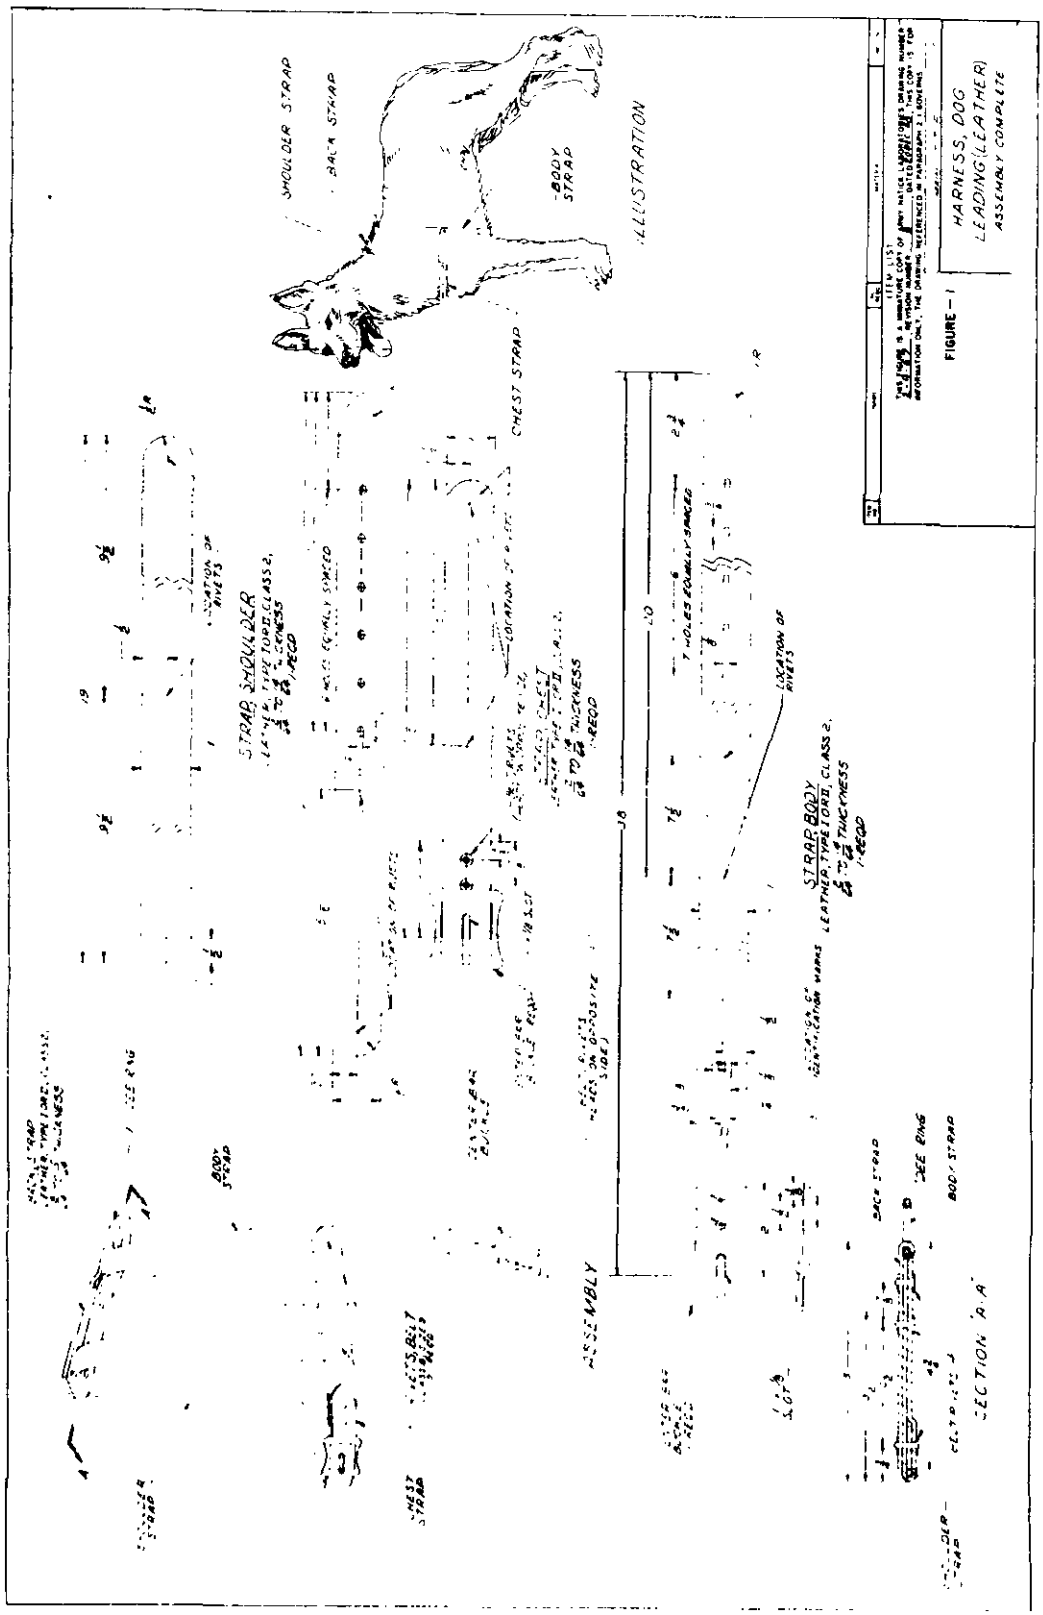

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:55Z
Check the source to verify that this is the current version before use.

"to detach this form, cut along this line"

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

Harness, Dog Leading (Leather) MIL-H-43210A

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:55Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01762

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRE-SS
Natick, Massachusetts 01762

FOLD

"to detach this form, cut along this line"

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T20:55Z
Check the source to verify that this is the current version before use.