MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO), CX-4620/AR

**Inactive for new design after 20 April 1984.
For new design use MIL-C-22442/23.**

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

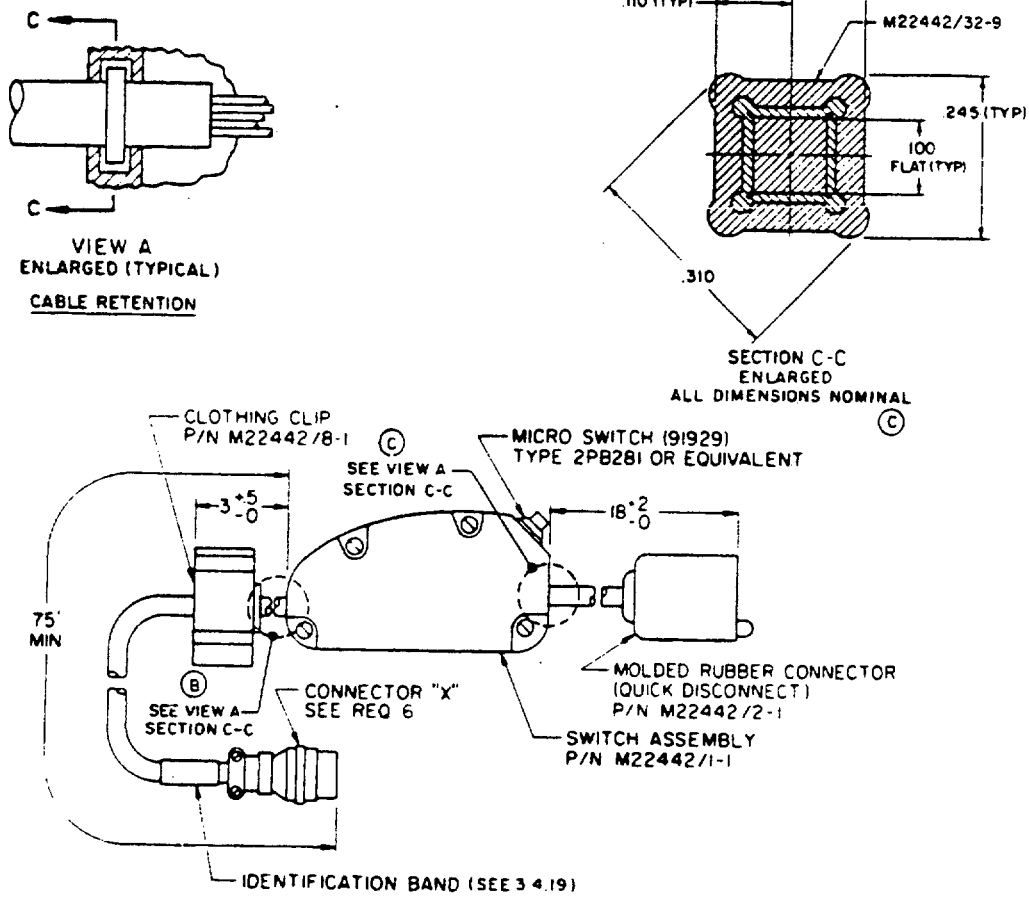


FIGURE 1. Cable assembly CX-4620/AR P/N M22442/10-1.

AMSC N/A
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

FSC 5995

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:24Z
Check the source to verify that this is the current version before use.

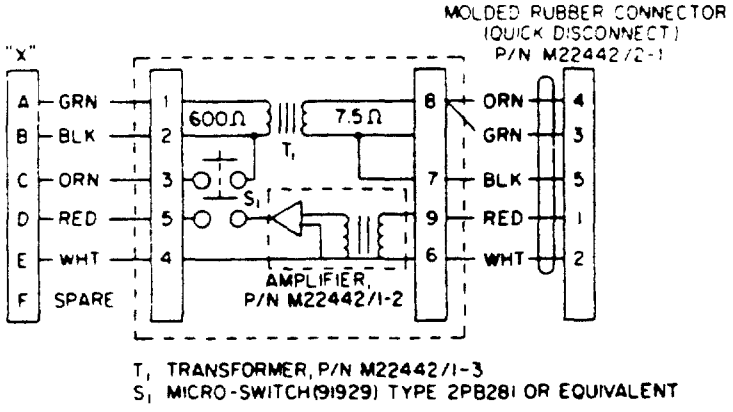


FIGURE 2. Cable assembly P/N M22442/10-1 CX-4620/AR schematic diagram.

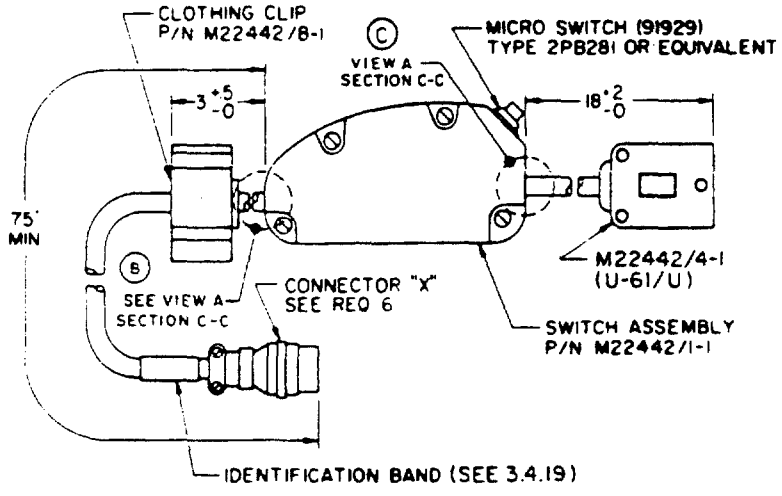


FIGURE 3. Cable assembly P/N M22442/10-2.

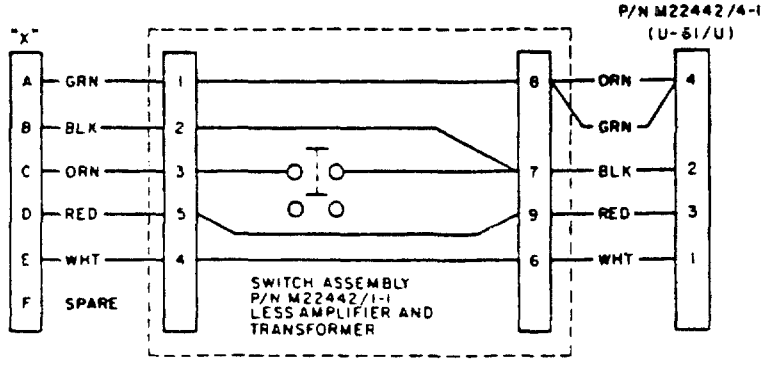


FIGURE 4. Cable assembly schematic diagram P/N M22442/10-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:24Z
Check the source to verify that this is the current version before use.

APPLICABLE DOCUMENTS:

MIL-C-10392	Cord, Electrical (Audio, Miniature)
MS3116	Connector, Plug, Electric

REQUIREMENTS:

1. The cable (cord) shall be in accordance with MIL-C-10392 Type WM-59A/U.

2. The weight of the cable assembly shall not be greater than 48 ounces.

3. The stay cord shall be firmly attached to the connectors and the switch assembly.

4. The amplifier shall be in accordance with M22442/1-2.

5. The transformer shall be in accordance with M22442/1-3.

(C) 6. Connector "X" shall be MS3116F10-6P or functional equivalent. Black tubing may be used as a bushing under strain relief.

7. The DC resistance of the M22442/10-1 cable assembly shall be as indicated when tested with a suitable ohmmeter.

   (a) Contact A of "X" and contact B of "X" less than 100 ohms.

   (b) Contact A of "X" and contact C of "X" with the switch depressed less than 100 ohms.

(C) (c) Contact E of "X" and contact 2 of M22442/2-1 less than 2 ohms.

   (d) Contact 5 of M22442/2-1 and contact 4 of M22442/2-1 less than 10 ohms.

   (e) Contact 3 of M22442/2-1 and contact 4 of M22442/2-1 less than 2 ohms.

8. The cable assembly shall be tested in accordance with the applicable tests listed in Table I.

9. The DC resistance of the M22442/10-2 cable assembly shall be as indicated when tested with a suitable ohmmeter.

   (a) Contact A of "X" and contact 4 of P/N M22442/4-1 less than 2 ohms.

   (b) Contact B of "X" and contact 2 of P/N M22442/4-1 less than 2 ohms.

(C) (c) Contact C of "X" and contact 2 of P/N M22442/4-1 less than 2 ohms when switch is closed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:24Z
Check the source to verify that this is the current version before use.

(d) Contact D of "X" and contact 3 of P/N M22442/4-1 less than 2 ohms.

(e) Contact E of "X" and contact 1 of P/N M22442/4-1 less than 2 ohms.

10. The terminal block shall be firmly attached to the switch housing.

NOTES:

1. All dimensions are in inches unless otherwise specified.

2. Tolerances of metal parts ± .005, molded parts ± .05 inch unless otherwise specified.

Preparing Activity:
Navy - AS
Project No. 5995-N118-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:24Z
Check the source to verify that this is the current version before use.

(C) TABLE I.

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.6.2	X	X	
Soldering	3.4.24	4.6.2.1	X	X	
Transformer Efficiency 2/	5	10a	X		X
Transformer Input Matching Impedance 2/	6	10b	X		X
Transformer Distortion 2/	7	10c	X		X
Transformer dc Winding Resistance 2/	8	10d	X	X	X
Transformer Output 2/	9	10e	X	X	
Amplifier Frequency Response 2/	13	19b	X	X	
Amplifier Input Power 2/	14	19c	X		X
Amplifier Distortion 2/	15	19d	X		X
Amplifier Linearity 2/	16	19b	X		X
Amplifier Stability 2/	17	19e	X		X
Amplifier Input Impedance 2/	18	19f	X		X
Continuity	3.5.3	4.6.5	X	X	

1/ Minimum tests for QPL retention (see paragraph 4.4.4)
2/ The number indicates the requirement or test specified in MIL-C-22442/1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:24Z
Check the source to verify that this is the current version before use.

TABLE I (Continued).

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP B					
Dielectric Withstanding Voltage	3.5.5	4.6.7	X		X
Gauging 1/	3.5.6	4.6.8	X	X	
Pull Test 1/	3.5.7	4.6.9	X		X
Bend Relief Flexibility	3.5.10	4.6.12	X		X
Low Temperature Flexibility	3.5.11	4.6.13	X		X
Durability 1/	3.5.13	4.6.15	X		X
Durometer Hardness	3.5.16	4.6.18	X		X
GROUP C					
Ozone Resistance 1/	3.5.14	4.6.16	X		X
Jacket Elongation	3.5.15	4.6.17	X		X
GROUP D 1/					
Temperature-Altitude 3/	3.6.1	4.7	X		
Salt Fog	3.6.2	4.7	X		
Flammability	3.6.3	4.7	X		
Explosion	3.6.4	4.7	X		
Vibration	3.6.5	4.7	X		
Shock	3.6.6	4.7	X		
Humidity	3.6.6	4.7	X		
Thermal Shock	3.6.6	4.7	X		

1/ Minimum tests for QPL retention (see paragraph 4.4.4)
3/ M22442/10-1 all altitude steps
M22442/10-2 steps 3 and 12 only

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:24Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-22442/10C(AS)	CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO), CX-4620/AR

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:24Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY
Commanding Officer
Naval Air Engineering Center
Systems Engineering Standardization Department
(SESD), Code 53
Lakehurst, NJ 08733

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Air Engineering Center
Systems Engineering Standardization Department
(SESD). Code 53
Lakehurst, NJ 08733

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:24Z
Check the source to verify that this is the current version before use.