MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, AIRCRAFT AUDIO, CX-4621/AR

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

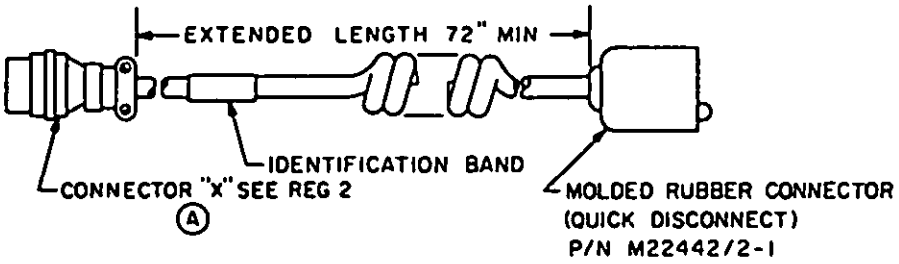


FIGURE 1 CABLE ASSEMBLY CX-4621/AR
P/N M22442/11-1

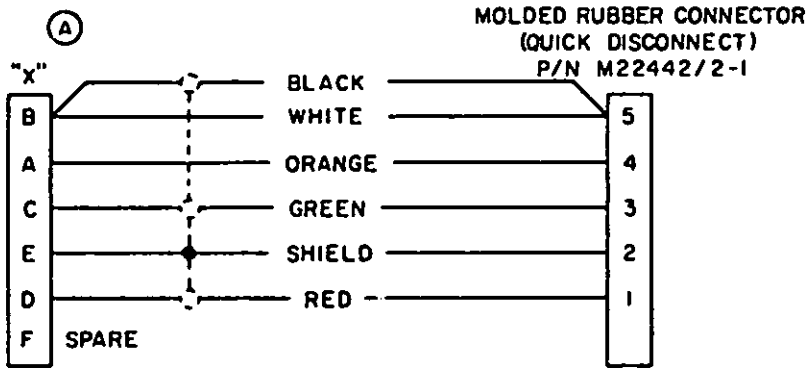


FIGURE 2 CABLE ASSEMBLY CX-4621/AR
SCHEMATIC DIAGRAM

* U.S. GOVERNMENT PRINTING OFFICE: 1983 — 705-040/5139

FSC 5995

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. THE CABLE (CORD) SHALL BE IN ACCORDANCE WITH MIL-C-22442/3.

(A) 2. THE CONNECTOR SHALL BE BENDIX PT06A-10-6P(SR) OR BUNDY BT06AC10-6P OR EQUAL. BLACK TUBING MAY BE USED AS A BUSHING UNDER STRAIN RELIEF.

3. THE WEIGHT OF THE CABLE ASSEMBLY SHALL NOT BE GREATER THAN 14 OUNCES.

4. THE CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY TO VERIFY THE PROPER CONNECTION OF THE TERMINALS.

(A) 5. THE DC RESISTANCE SHALL BE LESS THAN ONE OHM BETWEEN THE FOLLOWING CONTACTS WHEN TESTED WITH A SUITABLE OHMETER.

(a) CONTACT B OF "X" AND CONTACT 5 OF M22442/2-1.

(b) CONTACT A OF "X" AND CONTACT 4 OF M22442/2-1.

(c) CONTACT C OF "X" AND CONTACT 3 OF M22442/2-1.

(d) CONTACT E OF "X" AND CONTACT 2 OF M22442/2-1.

(e) CONTACT D OF "X" AND CONTACT 1 OF M22442/2-1.

6. THE CABLE ASSEMBLY SHALL BE TESTED IN ACCORDANCE WITH THE TESTS LISTED IN TABLE I.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.

2. TOLERANCES ARE $\pm$ .25 INCH UNLESS OTHERWISE SPECIFIED.

Preparing Activity:
Navy - AS
Project No. 5995-N110-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:24Z
Check the source to verify that this is the current version before use.

TABLE I

INSPECTION	REQUIREMENTS PARA.	TEST PARA.	GROUP I QUALIFICATION TESTS	GROUP II QUALITY CONFORMANCE TEST 100%	GROUP III SAMPLE TESTING PER 4.5.1
GROUP A (ALL SAMPLE UNITS)					
VISUAL & MECHANICAL INSPECTION	3.1, 3.4, 3.6	4.6.2	X	X	
SOLDERING	3.4.24	4.6.2.1	X	X	
DIELECTRIC WITHSTANDING VOLTAGE	3.5.5	4.6.7	X	X	
INSULATION RESISTANCE	3.5.4	4.6.6	X	X	
GAUGING	3.5.6	4.6.8	X		X
CONTINUITY	3.5.3	4.6.5	X	X	
PULL TEST	3.5.7	4.6.9	X		X
(A) CABLE REVERIFICATION (SPECIMEN)	3.5.15	4.6.17	X	X	
(A) DC RESISTANCE	3.5.2	4.6.4	X	X	
GROUP B (4 SAMPLES)					
LOW TEMPERATURE FLEXIBILITY	3.5.11	4.6.13	X		X
BEND RELIEF FLEXIBILITY	3.5.10	4.6.12	X		X
GROUP C (2 SAMPLES)					
OZONE RESISTANCE	3.5.14	4.6.16	X		
CONDUCTOR INSULATION OVERCURE	3.5.8	4.6.10	X		X
DURABILITY	3.5.13	4.6.15	X		
DUROMETER HARDNESS	3.5.16	4.6.18	X		X
GROUP E (4 SAMPLES)					
TEMPERATURE-ALTITUDE	3.6.1	4.7	X		
SALT FOG	3.6.1	4.7	X		
THERMAL SHOCK	3.5.9	4.6.11	X		
VIBRATION	3.6.1	4.7	X		

(A) (A) (A)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:24Z
Check the source to verify that this is the current version before use.