MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO), CX-4623/AR

Inactive for new design after 20 April 1984.
For new design use MIL-C-22442/22.

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

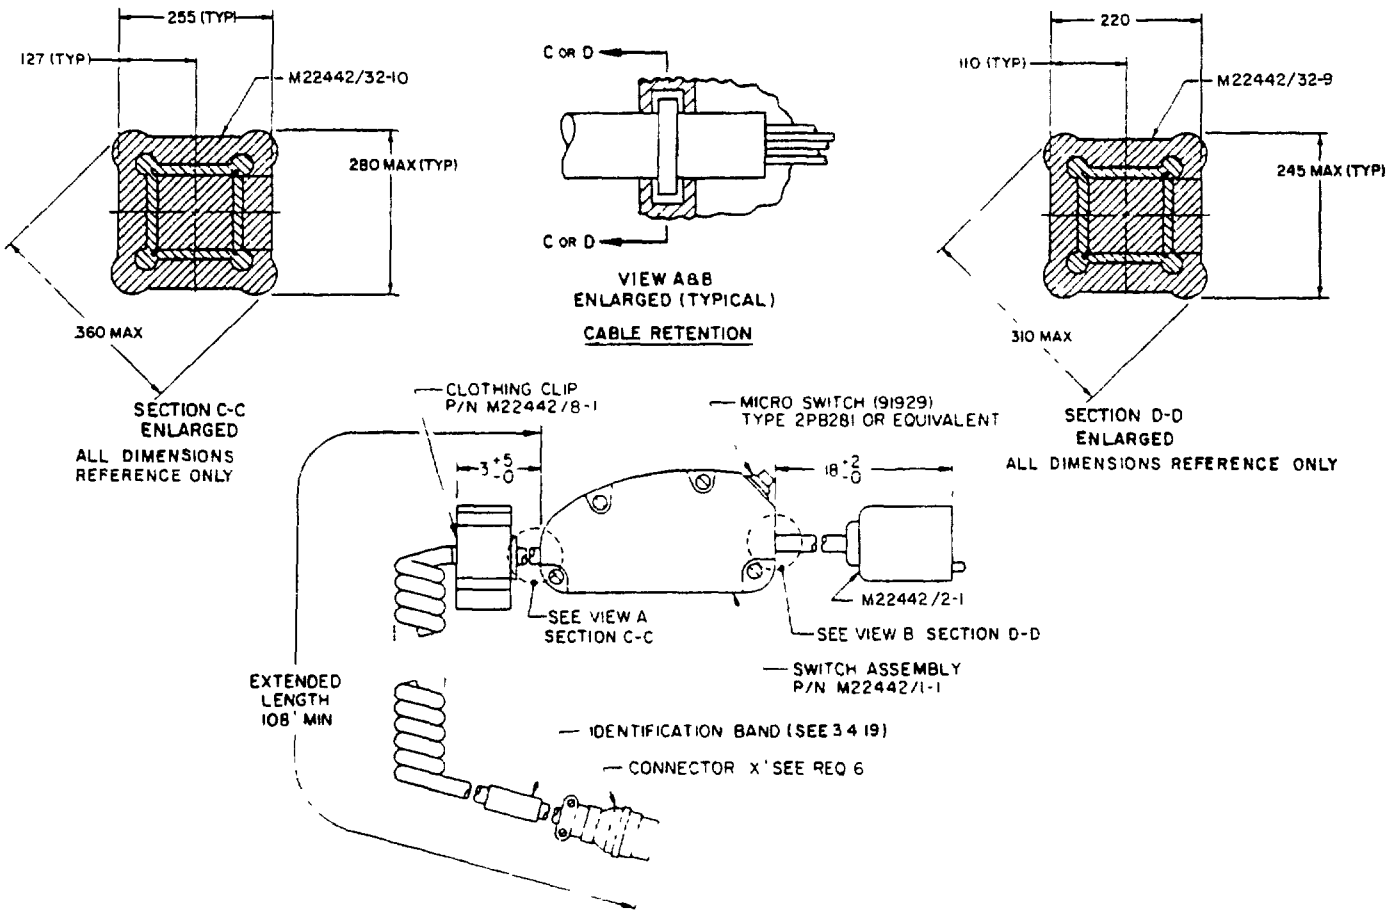


FIGURE 1. Cable assembly CX-4623/AR P/N M22442/13-1.

AMSC N/A FSC 5995

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:25Z
Check the source to verify that this is the current version before use.

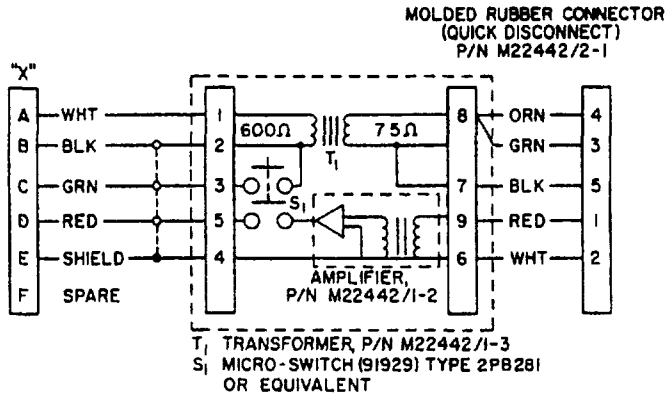


FIGURE 2. Cable assembly CX-4623/AR schematic diagram P/N M22442/13-1.

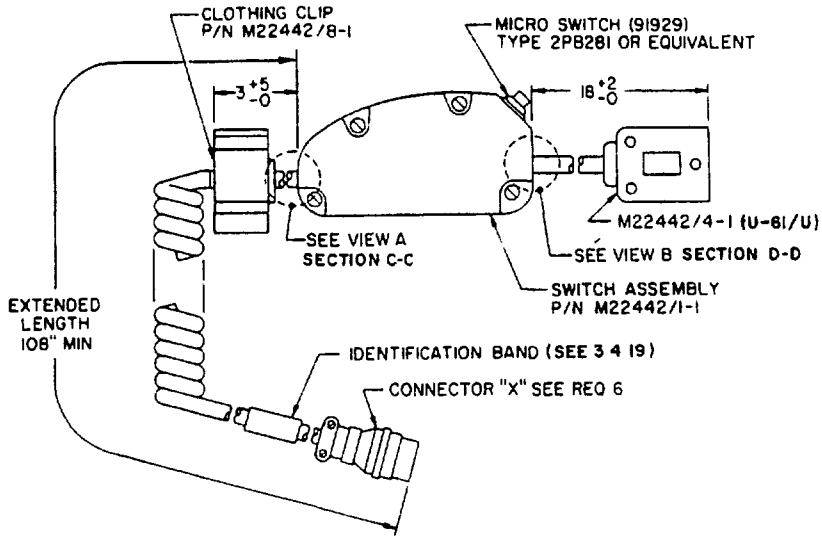


FIGURE 3. Cable assembly P/N M22442/13-2.

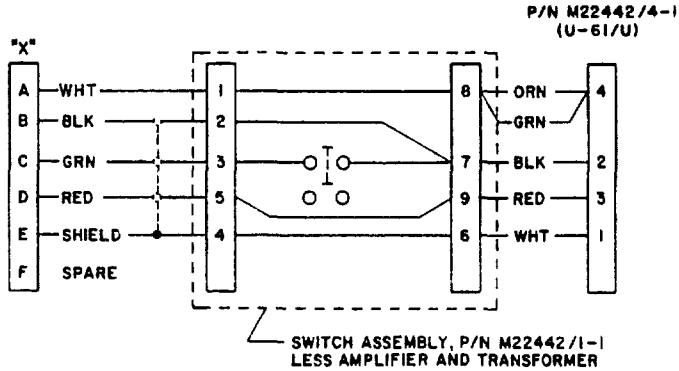


FIGURE 4. Cable assembly P/N M22442/13-2 schematic diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:25Z
Check the source to verify that this is the current version before use.

APPLICABLE DOCUMENTS:

MIL-C-10392	Cord, Electrical (Audio, Miniature)
MS3116	Connector, Plug, Electric

REQUIREMENTS:

1. The cable between the switch assembly and the "X" connector shall be in accordance with MIL-C-22442/3. The cable between the switch assembly and the M22442/2-1 or the M22442/4-1 connector shall be in accordance with MIL-C-10392 Type WM-59A/U.

2. The weight of the cable assembly shall not be greater than 20 ounces.

3. The stay cord shall be firmly attached to the connectors and the switch assembly.

4. The amplifier shall be in accordance with M22442/1-2.

5. The transformer shall be in accordance with M22442/1-3.

6. Connector "X" shall be MS3116F10-6P or functional equivalent. Black tubing may be used as a bushing under strain relief.

7. The DC resistance of the P/N M22442/13-1 cable assembly shall be as indicated when tested with a suitable ohmmeter.

   (a) Contact A of "X" and contact B of "X" less than 100 ohms.

   (b) Contact A of "X" and contact C of "X" with the switch depressed less than 100 ohms.

   (c) Contact E of "X" and contact 2 of P/N M22442/2-1 less than 4 ohms.

   (d) Contact 5 of P/N M22442/2-1 and contact 4 of P/N M22442/2-1 less than 10 ohms.

   (e) Contact 3 of P/N M22442/2-1 and contact 4 of P/N M22442/2-1 less than 4 ohms.

8. The cable assembly shall be tested in accordance with the applicable tests listed in Table I.

9. The DC resistance of the P/N M22442/13-2 cable assembly shall be as indicated when tested with a suitable ohmmeter.

   (a) Contact A of "X" and contact 4 of P/N M22442/4-1 less than 4 ohms.

   (b) Contact B of "X" and contact 2 of P/N M22442/4-1 less than 4 ohms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:25Z
Check the source to verify that this is the current version before use.

(c) Contact C of "X" and contact 2 of P/N M22442/4-1 less than 4 ohms when switch is closed.

(d) Contact D of "X" and contact 3 of P/N M22442/4-1 less than 4 ohms.

(e) Contact E of "X" and contact 1 of P/N M22442/4-1 less than 4 ohms.

10. The terminal block shall be firmly attached to the switch housing.

NOTES:

1. All dimensions are in inches.

2. Tolerances of metal parts ± .005, molded parts ± .05 inch unless otherwise specified.

Preparing Activity:
Navy - AS
Project No. 5995-N120-42

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:25Z
Check the source to verify that this is the current version before use.

(D) TABLE I.

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.6.2	X	X	
Soldering	3.4.24	4.6.2.1	X	X	
Transformer Efficiency 2/	5	10a	X		X
Transformer Input Matching Impedance 2/	6	10b	X		X
Transformer Distortion 2/	7	10c	X		X
Transformer dc Winding Resistance 2/	8	10d	X		X
Transformer Output 2/	9	10e	X	X	
Amplifier Frequency Response 2/	13	19b	X	X	
Amplifier Input Power 2/	14	19c	X		X
Amplifier Distortion 2/	15	19d	X		X
Amplifier Linearity 2/	16	19b	X		X
Amplifier Stability 2/	17	19e	X		X
Amplifier Input Impedance 2/	18	19f	X		X
Continuity	3.5.3	4.6.5	X	X	

1/ Minimum tests for QPL retention (see paragraph 4.4.4)
2/ The number indicates the requirement or test specified in MIL-C-22442/1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:25Z
Check the source to verify that this is the current version before use.

TABLE I (Continued).

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP B					
Dielectric Withstanding Voltage	3.5.5	4.6.7	X		X
Gauging 1/	3.5.6	4.6.8	X		X
Pull Test 1/	3.5.7	4.6.9	X		X
Bend Relief Flexibility	3.5.10	4.6.12	X		X
Durometer Hardness	3/5/16	4.6.18	X		X
GROUP C					
Low Temperature Flexibility	3.5.11	4.6.13	X		X
Durability 1/	3.5.13	4.6.15	X		X
Ozone Resistance 1/	3.5.14	4.6.16	X		X
Jacket Elongation	3.5.15	4.6.17	X		X
GROUP D 1/					
Temperature-Altitude 3/	3.6.1	4.7	X		
Salt Fog	3.6.2	4.7	X		
Vibration	3.6.5	4.7	X		
Shock	3.6.6	4.7	X		
Humidity	3.6.6	4.7	X		
Thermal Shock	3.6.6	4.7	X		

1/ Minimum tests for QPL retention (see paragraph 4.4.4)
3/ M22442/13-1 all altitude steps
M22442/13-2 steps 3 and 12 only

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:25Z
Check the source to verify that this is the current version before use.