MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, AIRCRAFT AUDIO, CX-4832/AR

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

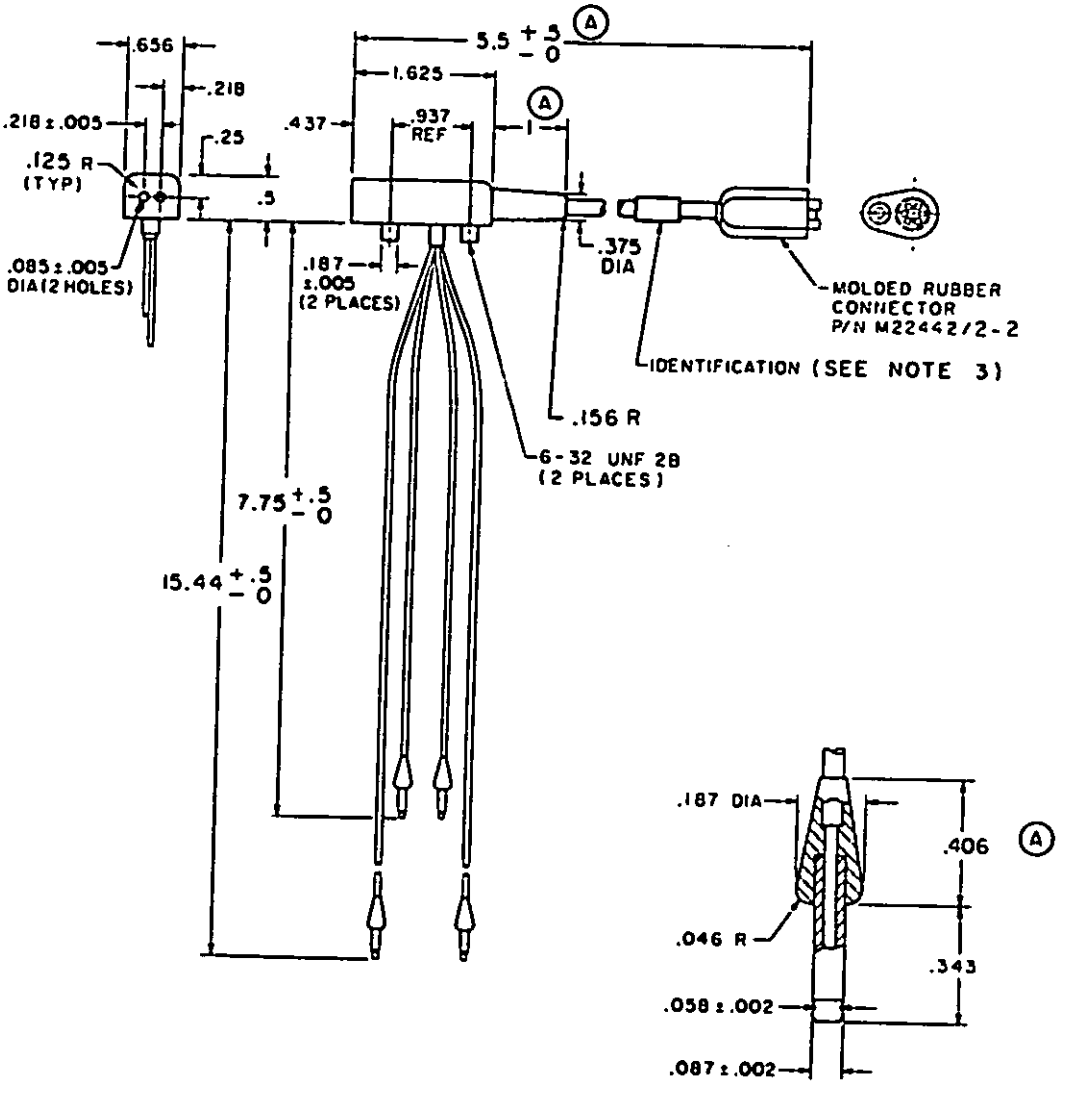


FIGURE 1 CABLE ASSEMBLY CX-4832/AR
P/N M22442/15-1

FSC 5995

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:25Z
Check the source to verify that this is the current version before use.

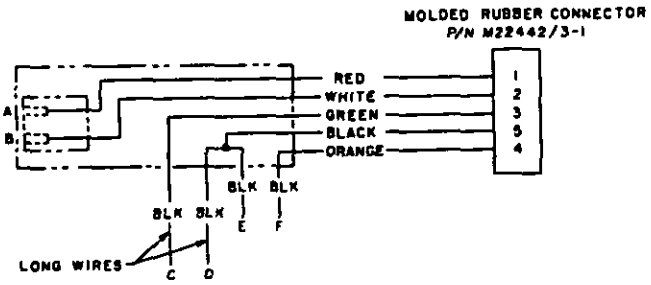


FIGURE 2 CABLE ASSEMBLY CX-4832/AR
SCHEMATIC DIAGRAM

APPLICABLE DOCUMENTS:

MIL-J-641	JACK, TELEPHONE, GENERAL SPECIFICATION FOR
MIL-R-6855	RUBBER, SYNTHETIC, SHEETS, STRIPS, MOLDED OR EXTRUDED SHAPES
MIL-C-10392	CORD ELECTRICAL (AUDIO MINIATURE)

REQUIREMENTS:

1. THE CABLE (CORD) SHALL BE IN ACCORDANCE WITH MIL-C-10392 TYPE WM-59/AU.
2. THE WEIGHT OF THE CABLE ASSEMBLY SHALL NOT BE GREATER THAN 8 OUNCES.
3. (A) THE STAY CORD SHALL BE FIRMLY ATTACHED TO THE CONNECTOR.
4. THE CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY TO VERIFY THE PROPER CONNECTION OF THE TERMINALS.
5. MATERIAL FOR MOLDED PARTS TO BE BLACK SYNTHETIC RUBBER, MIL-R-6855, CLASS III, GRADE 60.
6. SINGLE CONDUCTORS SHALL HAVE A NOMINAL CROSS SECTIONAL AREA OF 404 CIRCULAR MILS (NO. 24 AWG) AND SHALL BE IN ACCORDANCE WITH SPECIFICATION MIL-C-10392 EXCEPT THAT THE OUTER SEPARATOR AND JACKET SHALL BE OMITTED.
7. THE SINGLE CONDUCTOR CONNECTOR SHALL BE MADE OF HALF-HARD BRASS FINISHED WITH WHITE NICKEL PLATE TO 0.0004 INCH MINIMUM DEPTH. THE FINISHED DIMENSIONS SHALL BE AS SHOWN IN FIGURE 1.
8. SLEEVE P/N M22442/3-2 SHALL BE SUPPLIED WITH EACH CABLE ASSEMBLY. THE TERMINAL BLOCK SHALL HAVE DIMENSIONS AND DETAILS SHOWN IN FIGURES 1 AND 2 AND SHALL HAVE PROVISION FOR MOUNTING ON A PILOT'S HELMET. THE PINS ONLY, FROM JACK JJ-048, SHALL BE MOLDED IN THE TERMINAL BLOCK AND SHALL BE IN ACCORDANCE WITH SPECIFICATION MIL-J-641. MATERIAL FOR MOLDED PARTS SHALL BE IN ACCORDANCE WITH SPECIFICATION MIL-R-6855.
9. THE CABLE ASSEMBLY SHALL BE TESTED IN ACCORDANCE WITH THE TESTS LISTED IN TABLE I.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. TOLERANCES ARE $\pm$ .25 INCH UNLESS OTHERWISE SPECIFIED.
3. A MYLAR IDENTIFICATION PLATE MAY BE USED AS AN ALTERNATE METHOD.

Preparing Activity:
Navy - AS
Project No. 5995-N110-7

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:25Z
Check the source to verify that this is the current version before use.

TABLE I

INSPECTION	REQUIREMENTS PARA.	TEST PARA.	GROUP I QUALIFICATION TESTS	GROUP II QUALITY CONFORMANCE TEST 100%	GROUP III SAMPLE TESTING PER 4.5.1
GROUP A (ALL SAMPLE UNITS)					
VISUAL & MECHANICAL INSPECTION	3.1. 3.4. 3.6	4.6.2	X	X	
SOLDERING	3.4.24	4.6.2.1	X	X	
DIELECTRIC WITHSTANDING VOLTAGE	3.5.5	4.6.7	X		X (A)
INSULATION RESISTANCE	3.5.4	4.6.6	X		X (A)
GAUGING	3.5.6	4.6.8	X		X
CONTINUITY	3.5.3	4.6.5	X	X	
FULL TEST	3.5.7	4.6.9	X		X
(A) CABLE REVERIFICATION (SPECIMEN)	3.5.15	4.6.17	X	X	
GROUP B (4 SAMPLES)					
LOW TEMPERATURE FLEXIBILITY	3.5.11	4.6.13	X		
BEND RELIEF FLEXIBILITY	3.5.10	4.6.12	X		X
GROUP C (2 SAMPLES)					
OZONE RESISTANCE	3.5.14	4.6.16	X		
CONDUCTOR INSULATION OVERCURE	3.5.8	4.6.10	X		X
DURABILITY	3.5.13	4.6.15	X		
DUROMETER HARDNESS	3.5.16	4.6.18	X		X
GROUP E (4 SAMPLES)					
TEMPERATURE-ALTITUDE	3.6.1	4.7	X		
SALT FOG	3.6.1	4.7	X		
THERMAL SHOCK	3.5.9	4.6.11	X		
VIBRATION	3.6.1	4.7	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:25Z
Check the source to verify that this is the current version before use.