MILITARY SPECIFICATION SHEET

# (B) CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO), CX-7889/AIC-22(V), CX-7890/AIC-22(V), AND CX-11754

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

(B)

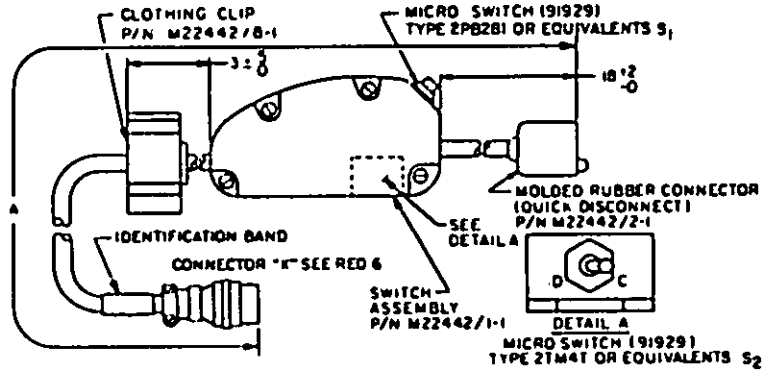




FIGURE 1. Cable assembly.

TABLE I


| DIMENSION A | PART NUMBER |
|---|---|
| 75 Ft Min | M22442/17-1 (CX-7889) |
| 15 Ft Min | M22442/17-2 (CX-7890) |
| 6 Ft Min | M22442/17-3 (CX-11754) |



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:26Z
Check the source to verify that this is the current version before use.

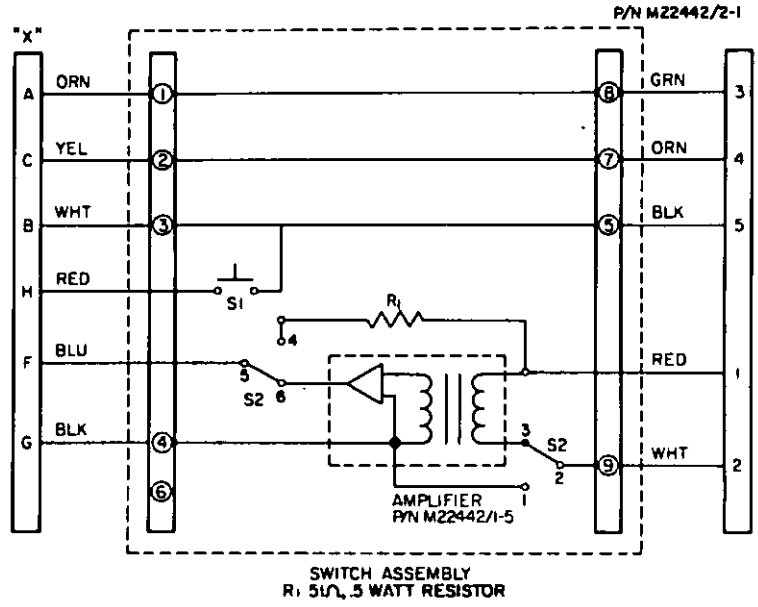


Ⓑ FIGURE 2. Cable assembly schematic diagram.

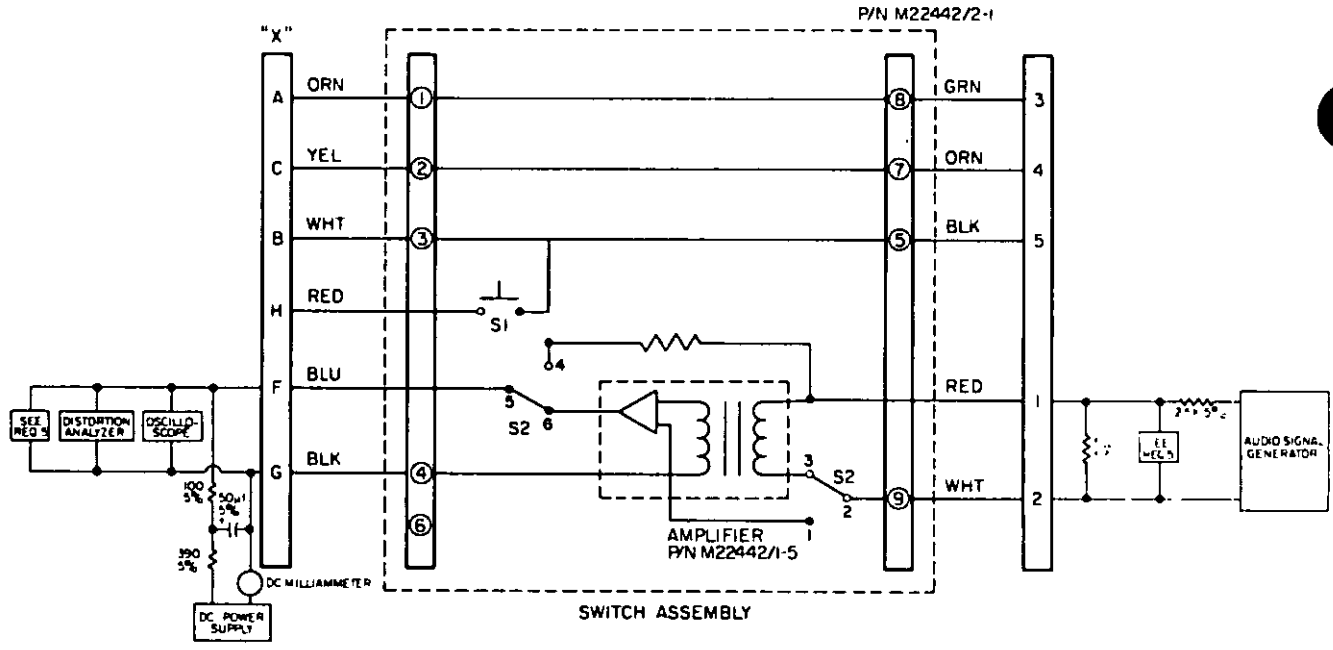


Ⓑ FIGURE 3. Test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:26Z
Check the source to verify that this is the current version before use.

APPLICABLE DOCUMENTS:

| | |
|---|---|
| MIL-C-10392 | CORD ELECTRICAL (AUDIO MINIATURE) |
| MIL-C-22442/34 | CABLE ASSEMBLY, AIRCRAFT AUDIO, CABLE |

REQUIREMENTS:

1. THE CABLE (CORD) BETWEEN CONNECTOR "X" AND THE SWITCH ASSEMBLY SHALL BE IN ACCORDANCE WITH MIL-C-22442/34. THE CABLE (CORD) BETWEEN THE SWITCH ASSEMBLY AND CONNECTOR M22442/2-1 SHALL BE IN ACCORDANCE WITH MIL-C-10392 TYPE WM-59A/U.

2. THE WEIGHT OF THE CABLE ASSEMBLY SHALL NOT BE GREATER THAN 48 OUNCES.

3. THE STAY CORD SHALL BE FIRMLY ATTACHED TO THE CONNECTOR.

4. THE AMPLIFIER SHALL BE IN ACCORDANCE WITH M22442/1-2 AND SHALL BE TESTED FOR GAIN, INPUT POWER, FREQUENCY RESPONSE, AMPLIFIER STABILITY, LINEARITY, IMPEDANCE AND DISTORTION WHEN TESTED WITH THE TEST CIRCUIT SHOWN HEREIN.

5. THE ELECTRONIC VOLTMETER WITH AN INPUT IMPEDANCE GREATER THAN 1 MEGOHM SHALL BE USED.

Ⓡ 6. THE CONNECTOR SHALL BE BENDIX PT06CE-12-10P(SR) OR BURNDY L12TP10P6NA OR EQUAL. BLACK TUBING MAY BE USED AS A BUSHING UNDER STRAIN RELIEF.

Ⓡ 7. THE DC RESISTANCE SHALL BE AS INDICATED WITH A SUITABLE OHMETER.

(a) CONTACT A OF "X" AND CONTACT 3 OF P/N M22442/2-1 LESS THAN 4 OHMS.

(b) CONTACT C OF "X" AND CONTACT 4 OF P/N M22442/2-1 LESS THAN 4 OHMS.

(c) CONTACT B OF "X" AND CONTACT 5 OF P/N M22442/2-1 LESS THAN 4 OHMS.

(d) CONTACT H OF "X" AND CONTACT 5 OF P/N M22442/2-1 LESS THAN 4 OHMS WHEN SWITCH $S_1$ IS CLOSED.

(e) CONTACT G OF "X" AND CONTACT 2 OF P/N M22442/2-1 LESS THAN 4 OHMS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:26Z
Check the source to verify that this is the current version before use.

(f) CONTACT G OF "X" AND CONTACT 2 OF P/N M22442/2-1 LESS THAN 40 OHMS WITH SWITCH $S_2$ IN "C" POSITION.

(g) CONTACT F OF "X" AND CONTACT 1 OF P/N M22442/2-1 50 $\pm$ 5 OHMS WITH SWITCH $S_2$ IN "C" POSITION.

(h) CONTACT G OF "X" AND CONTACT 2 OF P/N M22442/2-1 GREATER THAN 1 MEGOHM WITH SWITCH $S_2$ IN "D" POSITION.

Ⓑ 8. THE CABLE ASSEMBLY SHALL BE TESTED IN ACCORDANCE WITH THE TESTS LISTED IN TABLE II.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.

2. TOLERANCES ARE ±.25 INCH UNLESS OTHERWISE SPECIFIED.

Preparing Activity:
Navy - AS
Project No. 5995-N116-6



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:26Z
Check the source to verify that this is the current version before use.

TABLE II

| INSPECTION | REQUIREMENTS PARA. | TEST PARA. | GROUP I QUALIFICATION TESTS | GROUP II QUALITY CONFORMANCE TEST 100% | GROUP III SAMPLE TESTING PER 4.5.1 |
|---|---|---|---|---|---|
| GROUP A (ALL SAMPLE UNITS) | | | | | |
| VISUAL & MECHANICAL INSPECTION | 3.1, 3.4, 3.6 | 4.6.2 | X | X | |
| SOLDERING | 3.4.24 | 4.6.2.1 | X | X | |
| DIELECTRIC WITHSTANDING VOLTAGE | 3.5.5 | 4.6.7 | X | | X |
| INSULATION RESISTANCE | 3.5.4 | 4.6.6 | X | | X |
| GAUGING | 3.5.6 | 4.6.8 | X | | X |
| PULL TEST | 3.5.7 | 4.6.9 | X | | X |
| CABLE REVERIFICATION (SPECIMEN) | 3.5.15 | 4.6.17 | X | X | |
| DC RESISTANCE | 3.5.2 | 4.6.4 | X | X | |
| GROUP B (4 SAMPLES) | | | | | |
| LOW TEMPERATURE FLEXIBILITY | 3.5.11 | 4.6.13 | X | | X |
| BEND RELIEF FLEXIBILITY | 3.5.10 | 4.6.12 | X | | X |
| GROUP C (2 SAMPLES) | | | | | |
| OZONE RESISTANCE | 3.5.14 | 4.6.16 | X | | |
| CONDUCTOR INSULATION OVERCURE | 3.5.8 | 4.6.10 | X | | X |
| DURABILITY | 3.5.13 | 4.6.15 | X | | |
| DUROMETER HARDNESS | 3.5.16 | 4.6.18 | X | | X |
| GROUP D (3 SAMPLES) 1/ | | | | | |
| IMPEDANCE | 3.5.1 | 4.6.3 | X | | X |
| INPUT POWER REQUIREMENTS | 3.5.18 | 4.6.20 | X | | |
| SIGNAL INPUT VOLTAGE | 3.5.19 | 4.6.21 | X | X | |
| AMPLIFIER STABILITY | 3.5.24 | 4.6.22 | X | X | |
| FREQUENCY RESPONSE | 3.5.20 | 4.6.21 | X | | X |
| LINEARITY | 3.5.21 | 4.6.21 | X | | X |
| DISTORTION | 3.5.22 | 4.6.21 | X | | |
| GAIN | 3.5.23 | 4.6.21 | X | X | |
| GROUP E (4 SAMPLES) | | | | | |
| TEMPERATURE-ALTITUDE | 3.6.1 | 4.7 | X | | |
| SALT FOG | 3.6.1 | 4.7 | X | | |
| THERMAL SHOCK | 3.5.9 | 4.6.11 | X | | |
| VIBRATION | 3.6.1 | 4.7 | X | | X |
| EXPLOSION TEST | 3.6.1 | 4.7 | X | | |

1/ TESTED IN ACCORDANCE WITH MIL-C-22442/1-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:26Z
Check the source to verify that this is the current version before use.

**INSTRUCTIONS:** In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

*NOTE:* This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

*(Fold along this line)*

*(Fold along this line)*

DEPARTMENT OF THE NAVY
Commanding Officer
Naval Air Engineering Center
Systems Engineering & Standardization Department
(SESD), Code 93
Lakehurst, NJ 08733

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Air Engineering Center
Systems Engineering & Standardization Department
(SESD), Code 93
Lakehurst, NJ 08733

Source: https://assist.dla.mil -- Downloaded: 2026l0-19T12:26Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| MIL-C-22442/17B(AS) | CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO), CX-7889/AIC-22(V), CX-7890/AIC-22(V), AND CX-11754 |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR<br>☐ USER<br>☐ MANUFACTURER<br>☐ OTHER *(Specify)*: |
| b. ADDRESS *(Street, City, State, ZIP Code)* | |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

*(TO DETACH THIS FORM, CUT ALONG THIS LINE.)*

Source: https://assist.dla.mil -- Downloaded: 202610-19T12:26Z
Check the source to verify that this is the current version before use.