MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO), CX-7889/AIC-22(V), CX-7890/AIC-22(V), AND CX-11754

(C) Inactive for new design after 2 September 1988.
No superseding specification.

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

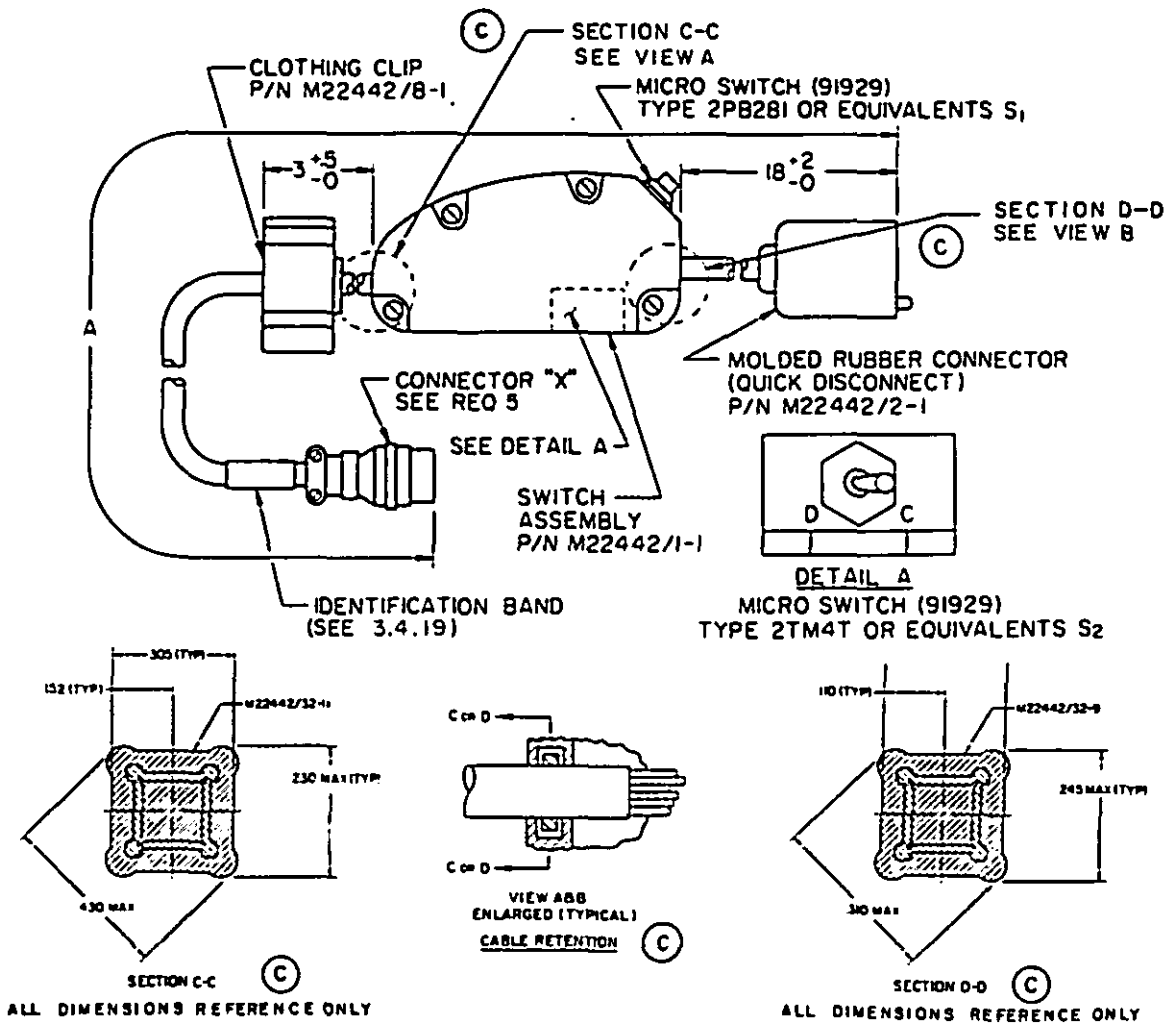


FIGURE 1. Cable assembly.

AMSC N/A FSC 5995

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:26Z
Check the source to verify that this is the current version before use.

TABLE I.

DIMENSION A	PART NUMBER	MAX WEIGHT
75 Ft Min	M22442/17-1 (CX-7889)	85 ounces
15 Ft Min	M22442/17-2 (CX-7890)	22 ounces
6 Ft Min	M22442/17-3 (CX-11754)	13 ounces

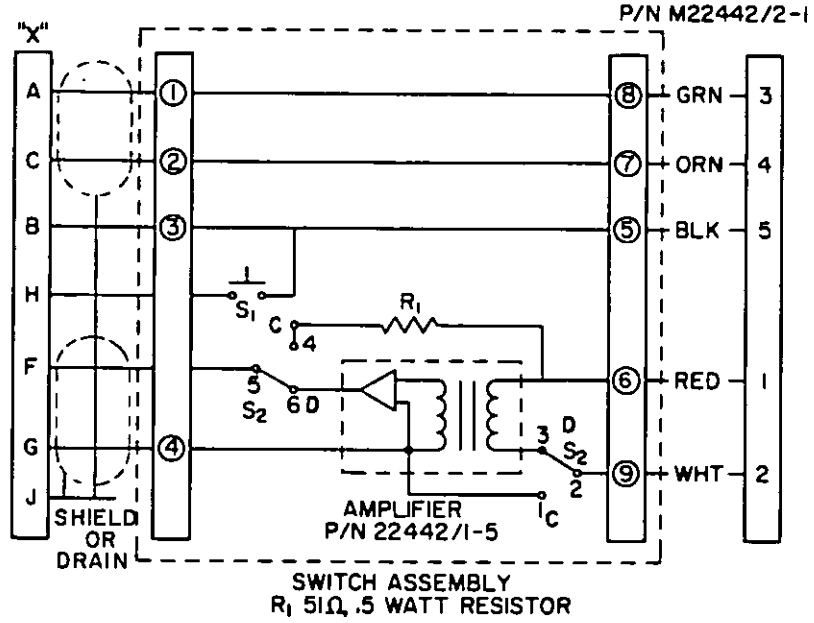


FIGURE 2. Cable assembly schematic diagram.

APPLICABLE DOCUMENTS:

MIL-C-10392	Cord, Electrical (Audio, Miniature)
MS3126	Connector, Plug, Electric

REQUIREMENTS:

1. The cable (cord) between connector "X" and the switch assembly shall be in accordance with MIL-C-22442/34. The cable (cord) between the switch assembly and connector M22442/2-1 shall be in accordance with MIL-C-10392 Type WM-59A/U.

(C) 2. The weight of the cable assembly shall not be greater than as specified in Table I.

(C) 3. The stay cord shall be firmly attached to the connectors and the switch assembly.

(C) 4. The amplifier shall be in accordance with M22442/1-5.

(C) 5. Connector "X" shall be MS3126F12-10P or functional equivalent. Black tubing may be used as a bushing under strain relief.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:26Z
Check the source to verify that this is the current version before use.

6. The DC resistance shall be as indicated with a suitable ohmmeter.

   (a) Contact A of "X" and contact 3 of P/N M22442/2-1 less than 4 ohms.

   (b) Contact C of "X" and contact 4 of P/N M22442/2-1 less than 4 ohms.

   (c) Contact B of "X" and contact 5 of P/N M22442/2-1 less than 4 ohms.

   (d) Contact H of "X" and contact 5 of P/N M22442/2-1 less than 4 ohms when switch S_1 is closed.

(C) (e) Contact G of "X" and contact 2 of P/N M22442/2-1 less than 4 ohms with switch S_2 in "C" position.

   (f) Contact F of "X" and contact 1 of P/N M22442/2-1 50 $\pm$ 5 ohms with switch S_2 in "C" position.

   (g) Contact G of "X" and contact 2 of P/N M22442/2-1 greater than 1 megohm with switch S_2 in "D" position.

7. The cable assembly shall be tested in accordance with the tests listed in Table II.

NOTES:

1. All dimensions are in inches.

2. Tolerances are metal parts $\pm$.005, molded sections $\pm$.05 inches unless otherwise specified.

3. These cables are presently used in the P-3 aircraft.

Preparing Activity:
Navy - AS
Project No. 5995-N120-7

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:26Z
Check the source to verify that this is the current version before use.

Ⓒ TABLE II.

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.6.2	X	X	
Soldering	3.4.24	4.6.2.1	X	X	
Amplifier Frequency Response 2/	13	19b	X	X	
Amplifier Input Power 2/	14	19c	X		X
Amplifier Distortion 2/	15	19d	X		X
Amplifier Linearity 2/	16	19b	X		X
Amplifier Stability 2/	17	19e	X		X
Amplifier Input Impedance 2/	18	19f	X		X
Continuity	3.5.3	4.6.5	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.5	4.6.7	X		X
Gauging 1/	3.5.6	4.6.8	X		X
Pull Test 1/	3.5.7	4.6.9	X		X
Durometer Hardness	3.5.16	4.6.18	X		X

1/ Minimum tests for QPL retention (see paragraph 4.4.4)
2/ The number indicates the requirement or test specified in MIL-C-22442/1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:26Z
Check the source to verify that this is the current version before use.

TABLE II (Continued).

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP C					
Bend Relief Flexibility	3.5.10	4.6.12	X		X
Low Temperature Flexibility	3.5.11	4.6.13	X		X
Durability 1/	3.5.13	4.6.15	X		X
Ozone Resistance 1/	3.5.14	4.6.16	X		X
Jacket Elongation	3.5.15	4.6.17	X		X
GROUP D 1/					
Temperature-Altitude	3.6.1	4.7	X		
Salt Fog	3.6.2	4.7	X		
Vibration	3.6.5	4.7	X		
Shock	3.6.6	4.7	X		
Humidity	3.6.6	4.7	X		
Thermal Shock	3.6.6	4.7	X		

1/ Minimum tests for QPL retention (see paragraph 4.4.4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:26Z
Check the source to verify that this is the current version before use.