INCH-POUND
MIL-DTL-22442/12C(AS)
5 January 1998
SUPERSEDING
MIL-C-22442/12B(AS)
2 September 1988

DETAIL SPECIFICATION SHEET

CABLE ASSEMBLY, AIRCRAFT AUDIO, CX-4622/AR

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-22442 listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

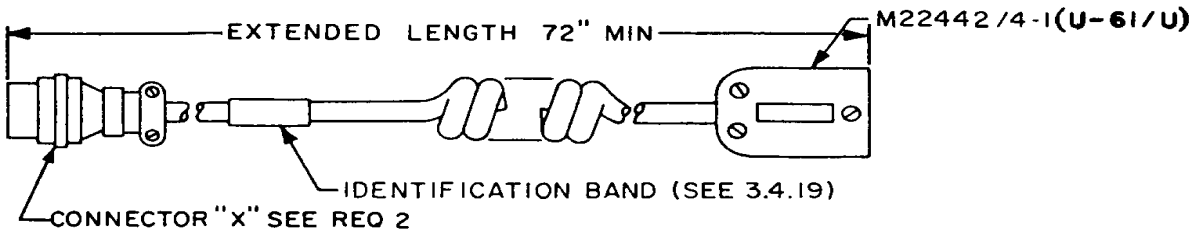

FIGURE 1. Cable Assembly CX-4622/AR P/ N M22442/12-1.

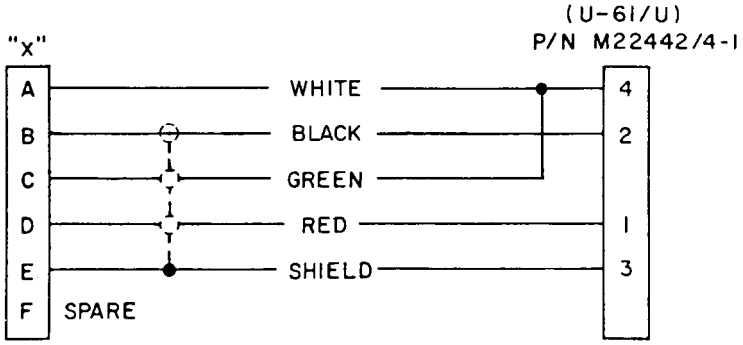

FIGURE 2. Cable Assembly CX-4622/AR P/M M2202/12-1 Schematic Diagram.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:25Z
Check the source to verify that this is the current version before use.

APPLICABLE DOCUMENTS

MS3116 - Connector, Plug, Electric

REQUIREMENTS:

1. The cable shall be in accordance with MIL-DTL-22442/3.

2. Connector "X" shall be MS3116F10-6P or functional equivalent. Black tubing may be used as a bushing under strain relief.

3. The weight of the cable assembly shall not be greater than 10 ounces.

4. The stay cord shall be firmly attached to the connectors.

5. The DC resistance shall be less than 2 ohms between the following contacts when tested with an ohmmeter.

(a) Contact A of ."X" and contact 4 of P/N M22442/4-1.

(b) Contact B of "X" and contact 2 of P/N M22442/4-1.

(c) Contact C of "X" and contact 4 of P/N M22442/4-1.

(d) Contact D of "X" and contact 1 of P/N M22442/4-1.

(e) Contact E of "X" and contact 3 of P/N M22442/4-1.

6. The cable assembly shall be tested in accordance with the tests listed in Table I.

NOTES:

1. All dimensions are in inches.

2. Tolerances are metal parts +.005, molded sections +.05 inches unless otherwise specified.

Preparing activity:
Navy AS
(Project No. 5995-0128-32)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:25Z
Check the source to verify that this is the current version before use.

TABLE I. Tests

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Tests	Group III Sample Testing 100% Per 4.5.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.6.2	X	X	
Soldering	3.4.24	4.6.2.1	X	X	
Continuity	3.5.3	4.6.5	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.5	4.6.7		X	X
Pull Test 1/	3.5.7	4.6.9		X	X
GROUP C					
Durability 1/	3.5.13	4.6.15	X		X
Ozone Resistance 1/	3.5.14	4.6.16	X		X
Jacket Elongation	3.5.15	4.6.17	X		X
GROUP D 1/					
Temperature-Altitude 2/	3.6.1	4.7	X		
Salt Fog	3.6.2	4.7	X		
Vibration	3.6.5	4.7	X		
Shock	3.6.6	4.7	X		
Humidity	3.6.6	4.7	X		
Thermal Shock	3.6.6	4.7	X		

1/ Minimum tests for QPL retention (see paragraph 4.4.4)
2/ Steps 3 and 12 only

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:25Z
Check the source to verify that this is the current version before use.