INCH-POUND
MIL-DTL-22442/19D(AS)
5 January 1998
SUPERSEDING
MIL-C-22442/19C(AS)
26 May 1989

DETAIL SPECIFICATION SHEET

CABLE ASSEMBLY, AIRCRAFT AUDIO, CX-12972/AR

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-22442 listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

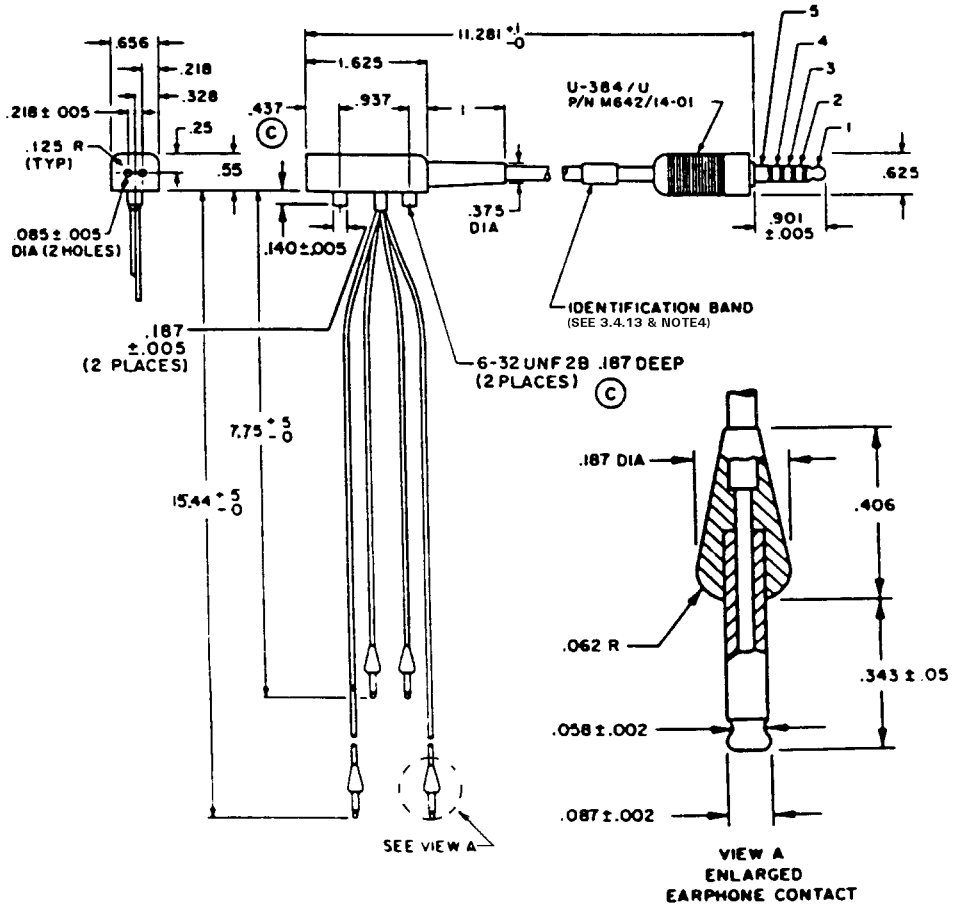

FIGURE l. Cable assembly CX-12972/AR PIN M22442/19-l.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:26Z
Check the source to verify that this is the current version before use.

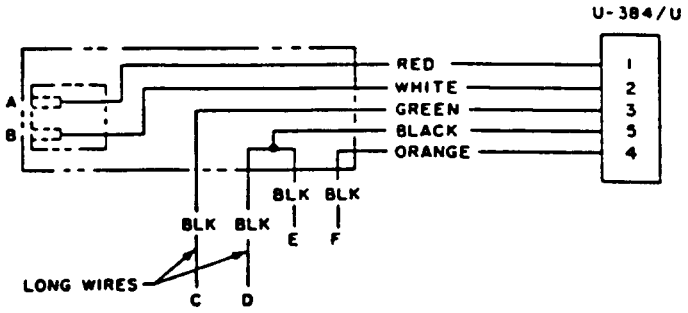

FIGURE 2. Cable assembly P/N M22442/l9-1, CX-12972/AR Schematic Diagram.

APPLICABLE DOCUMENTS:

MIL-J-641 - Jack, Telephone General Specification for

MIL-P-642/l4 - Plugs, Telephone (Type U-384/U) 5 Conductor, Single

MIL-C-10392 - Cord, Electrical (Audio Miniature)

REQUIREMENTS:

*1. The cable (cord) shall be in accordance with MIL-C-10392 Type WM-59A/U or equal.

2. The weight of the cable assembly shall not be greater than 3 ounces.

3. The stay cord shall be firmly attached to the connectors.

4. Single conductors shall have a nominal cross sectional area of 404 circular mils (No. 24 AWG) and shall be in accordance with specification MIL-C-10392 except that the outer separator and jacket shall be omitted.

5. The single conductor connector shall be made of half-hard brass or equivalent finished (as approved by the qualifying activity) with white nickel plate to 0.0004 inch minimum depth. The finished dimensions shall be as shown in Figure l.

*6. The terminal block shall have dimensions and details shown in Figures l and 2 and shall have provision for mounting on a pilot's helmet. The pins only, from jack JJ-048, shall be molded in the terminal block and shall be in accordance with MIL-J-641 (see 3.4.4) .

7. The DC resistance shall be as indicated when tested with an ohmmeter.

(a). Terminal "A" and contact l of P/N M642/l4-0l (U-384/U) less than 2 ohms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:26Z
Check the source to verify that this is the current version before use.

(b). Terminal "B" and contact 2 of P/N M642/l4-0l (U-384/U) less than 2 ohms.

(c) Terminal "C" and contact 3 of P/N M642/l4-0l (U-384/U) less than 2 ohms.

(d). Terminals "D" and "E" and contact 5 of P/N M642/14-0l (U-384/U) less than 2 ohms.

(e). Terminal "F" and contact 4 of P/N M642/l4-0l (U-384/U) less than 2 ohms.

8. The cable assembly shall be tested in accordance with the tests listed in Table I.

*9. The 2 6-32 UNC mounting nuts shall withstand a minimum of 6 inch-pounds of torque out force. This test shall be in accordance with Group III sampling testing.

NOTES:

l. All dimensions are in inches.

2. Tolerances are:

Metal parts ±.005
Molded sections ±.05 inches unless otherwise specified.

3. MIL-C-8l864 is superseded by MIL-DTL-22442/l9.

4. Mylar identification plates may be used as an alternate method.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Preparing activity:
Navy - AS
(Project No. 5995-0128-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:26Z
Check the source to verify that this is the current version before use.

TABLE I. Tests

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.4.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.5.2	X	X	
Soldering	3.4.18	4.5.2.1	X	X	
Continuity	3.5.1	4.5.3	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.2	4.5.4	X		X
Pull and Twist Test 1/	3.5.4	4.5.6	X		X
Bend Relief Flexibility	3.5.5	4.5.7	X		X
Durometer Hardness	3.5.10	4.5.12	X		X
GROUP C					
Low Temperature Flexibility	3.5.6	4.5.8	X		X
Durability 1/	3.5.7	4.5.9	X		X
Ozone Resistance 1/	3.5.8	4.5.10	X		X
Jacket Elongation	3.5.9	4.5.11	X		X
GROUP D 1/					
Salt Fog	3.6.2	4.6.2	X		
Humidity	3.6.5	4.6.5	X		
Thermal Shock	3.6.5	4.6.6	X		

l/ Minimum tests for QPL retention (see paragraph 4.3.3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:26Z
Check the source to verify that this is the current version before use.