MILITARY SPECIFICATION SHEET

(B) CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO), CX-12973/AR

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

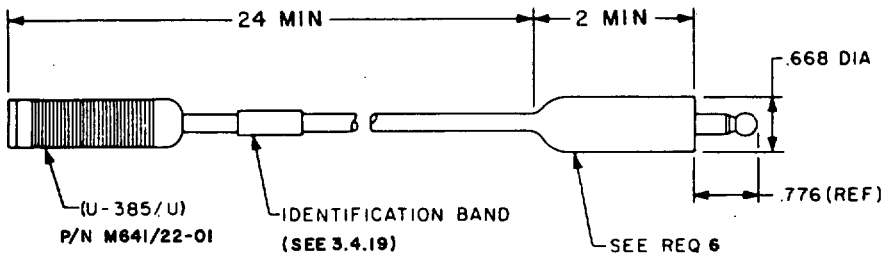


FIGURE 1 CABLE ASSEMBLY CX-12973/AR
P/N M22442/20-1

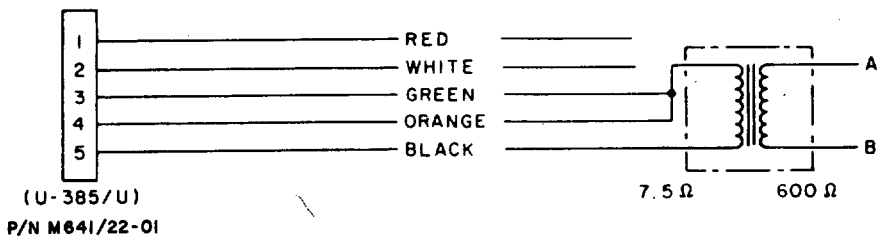


FIGURE 2 CABLE ASSEMBLY CX-12973/AR
P/N M22442/20-1 SCHEMATIC DIAGRAM

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:27Z
Check the source to verify that this is the current version before use.

APPLICABLE DOCUMENTS:

MIL-C-10392	Cord, Electrical (Audio, Miniature)
MIL-P-642/3	Plug, Telephone (Type PJ054B and PJ-054R) and Accessory Screws

REQUIREMENTS:

1. The cable (cord) shall be in accordance with MIL-C-10392 Type WM-59A/U.

(B) 2. The weight of the cable assembly shall not be greater than 4 ounces.

3. The stay cord shall be firmly attached to the connectors.

4. The DC resistance shall be as indicated between the following contacts when tested with a suitable ohmmeter.

(B) (a) Contact 3 of P/N M641/22-01 (U-385/U) and contact 4 of P/N M641/22-01 (U-385/U) less than 2 ohms.

(b) Contact 3 of P/N M641/22-01 (U-385/U) and contact 5 of P/N M641/22-01 (U-385/U) less than 10 ohms.

(B) (c) Contact A of the transformer plug and contact B of the transformer plug less than 100 ohms.

(B) 5. The transformer shall be in accordance with M22442/1-3.

6. The plug shall be in accordance with MIL-P-642/3 for type PJ-054B except that the shell and terminals may be modified to accommodate the transformer. The shell shall be an integral part of the plug sleeve and shall provide means for anchoring the cordage.

7. Transformer may be potted.

8. The cable assembly shall be tested in accordance with the tests listed in Table I.

NOTES:

1. All dimensions are in inches.

2. Tolerances are metal parts $\pm$.005, molded sections $\pm$.05 inches unless otherwise specified.

3. MIL-C-81865 is superseded by MIL-C-22442/20.

Preparing Activity:
Navy - AS
Project No. 5995-N120-9

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:27Z
Check the source to verify that this is the current version before use.

(B) TABLE I.

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.6.2	X	X	
Soldering	3.4.24	4.6.2.1	X	X	
Transformer Efficiency 2/	5	10a	X		X
Transformer Input Matching Impedance 2/	6	10b	X		X
Transformer Distortion 2/	7	10c	X		X
Transformer dc Winding Resistance 2/	8	10d	X		X
Transformer Output 2/	9	10e	X	X	
Continuity	3.5.3	4.6.5	X	X	
GROUP B					
Dielectric Withstanding Voltage	3.5.5	4.6.7	X		X
Gauging 1/	3.5.6	4.6.8	X		X
Pull Test 1/	3.5.7	4.6.9	X		X
Bend Relief Flexibility	3.5.10	4.6.12	X		X

1/ Minimum tests for QPL retention (see paragraph 4.4.4).
2/ The number indicates the requirement or test specified in MIL-C-22442/1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:27Z
Check the source to verify that this is the current version before use.

TABLE I (Continued).

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.5.1
GROUP C					
Low Temperature Flexibility	3.5.11	4.6.13	X		X
Durability 1/	3.5.13	4.6.15	X		X
Ozone Resistance 1/	3.5.14	4.6.16	X		X
Jacket Elongation	3.5.15	4.6.17	X		X
GROUP D 1/					
Temperature-Altitude	3.6.1	4.7	X		
Salt Fog	3.6.2	4.7	X		
Vibration	3.6.5	4.7	X		
Shock	3.6.6	4.7	X		
Humidity	3.6.6	4.7	X		
Thermal Shock	3.6.6	4.7	X		

1/ Minimum tests for QPL retention (see paragraph 4.4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:27Z
Check the source to verify that this is the current version before use.