INCH-POUND
MIL-DTL-22442/20C(AS)
5 January 1998
SUPERSEDING
MIL-C-2442/20B(AS)
2 September 1988

DETAIL SPECIFICATION SHEET

CABLE ASSEMBLY, AIRCRAFT AUDIO, CX-12973/AR

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-22442 listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

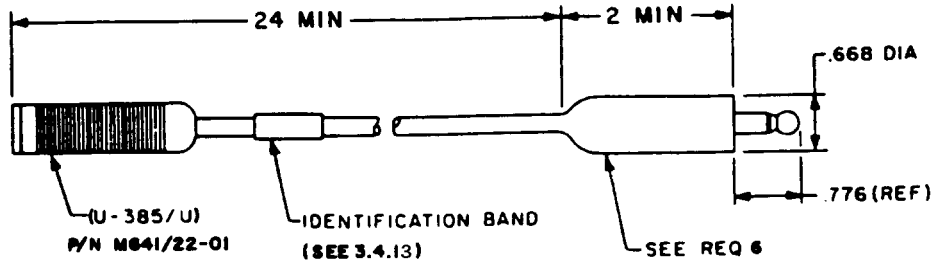

FIGURE 1 Cable Assembly CX-12973/AR P/N M22442/20-1

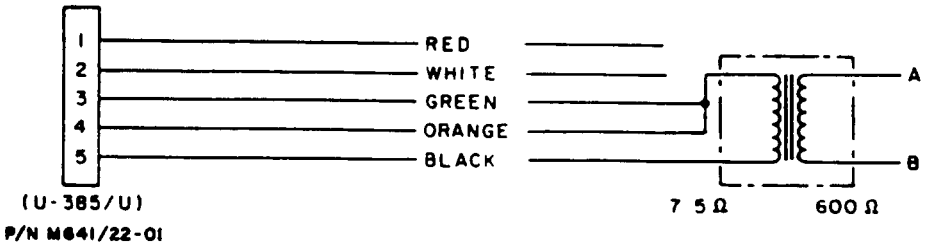

FIGURE 2 Cable Assembly CX-12973/AR P/N M22442/20-Schematic Diagram.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:27Z
Check the source to verify that this is the current version before use.

APPLICABLE DOCUMENTS:

MIL-P-642/3	-	Plug, Telephone (Type PJ-054B and PJ-054R) and Accessory Screws
MIL-C-10392	-	Cord, Electrical (Audio, Miniature)

REQUIREMENTS:

*1. The cable (cord) shall be in accordance with MIL-C-10392 Type WM-59A/U or equal

2. The weight of the cable assembly shall not be greater than 4 ounces.

3. The stay cord shall be firmly attached to the connectors.

4. The DC resistance shall be as indicated between the following contacts when tested with an ohmmeter.

(a) Contact 3 of P/N M64l/22-0l (U-385/U) and contact 4 of P/N M64l/22-0l (U-385/U) less than 2 ohms.

(b) Contact 3 of P/N M64l/22-0l (U-385/U) and contact 5 of P/N M64l/22-0l (U-385/U) less than l0 ohms.

(c) Contact A of the transformer plug and contact B of the transformer plug less than 100 ohms.

5. The transformer shall be in accordance with M22442/l-3.

6. The plug shall be a functional equivalent to MIL-P-642 for Type PJ-054B except that the shell and terminals may be modified to accommodate the transformer. The shell shall be an integral part of the plug sleeve and shall provide means for anchoring the cordage.

7. Transformer may be potted.

8. The cable assembly shall be tested in accordance with the tests listed in Table I.

NOTES:

l. All dimensions are in inches.

2. Tolerances are metal parts ±.005, molded sections ±.05 inches unless otherwise specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:27Z
Check the source to verify that this is the current version before use.

3. MIL-C-8l865 is superseded by MIL-DTL-22442/20.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Preparing activity:
Navy - AS
(Project No. 5995-0l28-06)

TABLE I. Tests

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.4.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.5.2	X	X	
Soldering	3.4.18	4.5.2.1	X	X	
Transformer Efficiency 2/	5	10a	X		X
Transformer Input Matching Impedance 2/	6	10b	X		X
Transformer Distortion 2/	7	10c	X		X
Transformer dc Winding Resistance 2/	8	10d	X		X
Transformer Output 2/	9	10e	X	X	
Continuity	3.5.1	4.5.3	X	X	

1/ Minimum tests for QPL retention (see paragraph 4.3 3)
2/ The number indicates the requirement or test specified in MIL-DTL-22442/1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:27Z
Check the source to verify that this is the current version before use.

TABLE I. Tests (Continued).

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.4.1
GROUP B					
Dielectric Withstanding Voltage	3.5.2	4.5.4	X		X
Gauging 1/	3.5.3	4.5.5	X		X
Pull and Twist Test 1/	3.5.4	4.5.6	X		X
Bend Relief Flexibility	3.5.5	4.5.7	X		X
GROUP C					
Low Temperature Flexibility	3.5.6	4.5.8	X		X
Durability 1/	3.5.7	4.5.9	X		X
Ozone Resistance 1/	3.5.8	4.5.10	X		X
Jacket Elongation	3.5.9	4.5.11	X		X
GROUP D 1/					
Salt Fog	3.6.2	4.6.2	X		
Vibration	3.6.4	4.6.4	X		
Humidity	3.6.5	4.6.5	X		
Thermal Shock	3.6.5	4.6.6	X		

l/ Minimum tests for QPL retention (see paragraph 4.3.3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:27Z
Check the source to verify that this is the current version before use.