MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, AIRCRAFT AUDIO, CX-12974/AR

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

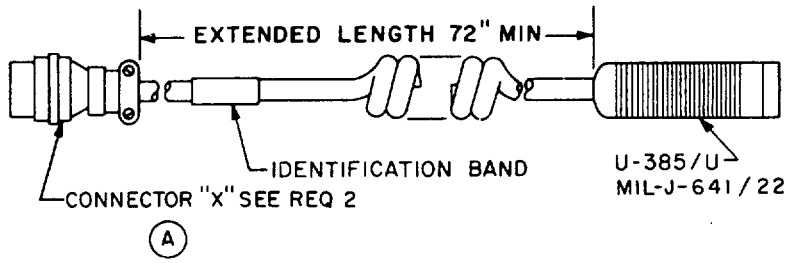


FIGURE 1 CABLE ASSEMBLY CX-12974/AR
P/N M22442/21-1

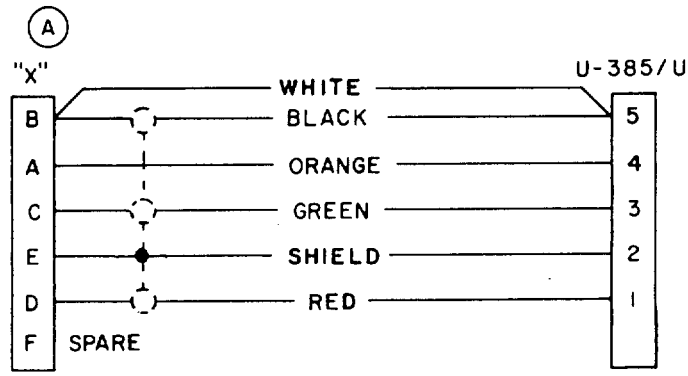


FIGURE 2 CABLE ASSEMBLY CX-12974/AR
SCHEMATIC DIAGRAM

FSC 5995

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:27Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. THE CABLE SHALL BE IN ACCORDANCE WITH MIL-C-22442/3.

(A) 2. THE CONNECTOR SHALL BE BENDIX PT06A-10-6P(SR) OR BUNDY BT06AC10-6P OR EQUAL. BLACK TUBING MAY BE USED AS A BUSHING UNDER STRAIN RELIEF.

A 3. THE WEIGHT OF THE CABLE ASSEMBLY SHALL NOT BE GREATER THAN 9 OUNCES.

4. THE CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY TO VERIFY THE PROPER CONNECTION OF THE TERMINALS.

(A) 5. THE DC RESISTANCE SHALL BE LESS THAN 1 OHM BETWEEN THE FOLLOWING CONTACTS.

(a) CONTACT B OF "X" AND CONTACT 5 OF U-385/U.

(b) CONTACT A OF "X" AND CONTACT 4 OF U-385/U.

(c) CONTACT C OF "X" AND CONTACT 3 OF U-385/U.

(d) CONTACT E OF "X" AND CONTACT 2 OF U-385/U.

(e) CONTACT D OF "X" AND CONTACT 1 OF U-385/U.

6. THE CABLE ASSEMBLY SHALL BE TESTED IN ACCORDANCE WITH THE TESTS LISTED IN TABLE I.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.

2. TOLERANCES ARE $\pm$ .25 INCH UNLESS OTHERWISE SPECIFIED.

3. MIL-C-81863 IS SUPERSEDED BY MIL-C-22442/21.

Preparing Activity:
Navy - AS
Project No. 5995-N110-11

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:27Z
Check the source to verify that this is the current version before use.

TABLE I

INSPECTION	REQUIREMENTS PARA.	TEST PARA.	GROUP I QUALIFICATION TESTS	GROUP II QUALITY CONFORMANCE TEST 100%	GROUP III SAMPLE TESTING PER 4.5.1	
GROUP A (ALL SAMPLE UNITS)						
VISUAL & MECHANICAL INSPECTION	3.1, 3.4, 3.6	4.6.2	X	X		
SOLDERING	3.4.24	4.6.2.1	X		X	A
DIELECTRIC WITHSTANDING VOLTAGE	3.5.5	4.6.7	X		X	A
INSULATION RESISTANCE	3.5.4	4.6.6	X	X		
PULL TEST	3.5.7	4.6.9	X		X	
CABLE REVERIFICATION (SPECIMEN)	3.5.15	4.6.17	X	X		A
DC RESISTANCE	3.5.2	4.6.4	X	X		A
GROUP C (2 SAMPLES)						
OZONE RESISTANCE	3.5.14	4.6.16	X			
DURABILITY	3.5.13	4.6.15	X			
GROUP E (4 SAMPLES)						
TEMPERATURE-ALTITUDE	3.6.1	4.7	X			
SALT FOG	3.6.1	4.7	X			
VIBRATION	3.6.1	4.7	X			

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:27Z
Check the source to verify that this is the current version before use.