MILITARY SPECIFICATION SHEET

(B) CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO), CX-12974/AR

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

(B)

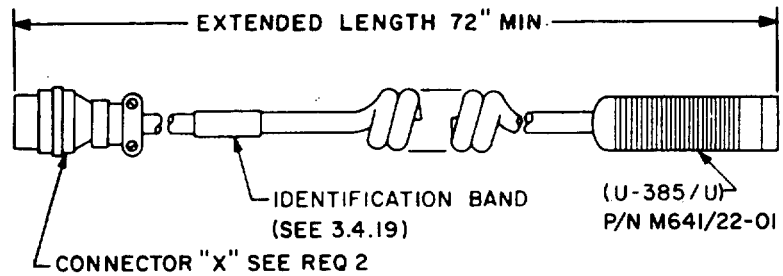



FIGURE 1 CABLE ASSEMBLY CX-12974/AR
P/N M22442/21-1

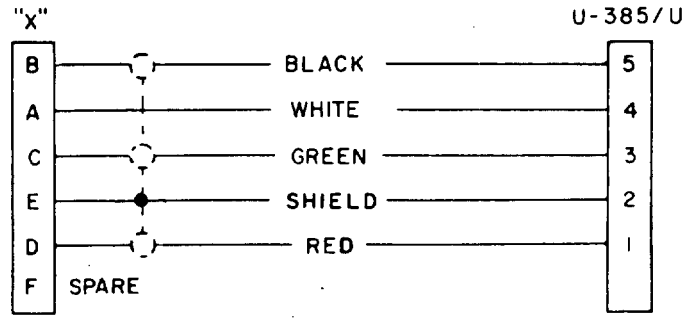



FIGURE 2 CABLE ASSEMBLY CX-12974/AR
P/N M22442/21-1 SCHEMATIC DIAGRAM

AMSC N/A FSC 5995

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:27Z
Check the source to verify that this is the current version before use.

APPLICABLE DOCUMENTS:

| | |
|---|---|
| MIL-J-641/22 | Jacks, Telephone, General Specification for |
| MS3116 | Connector, Plug, Electric |

REQUIREMENTS:

1. The cable shall be in accordance with MIL-C-22442/3.

(B) 2. Connector "X" shall be MS3116F10-6P or functional equivalent. Black tubing may be used as a bushing under strain relief.

(B) 3. The weight of the cable assembly shall not be greater than 10 ounces.

(B) 4. The stay cord shall be firmly attached to the connectors.

5. The DC resistance shall be less than 2 ohms between the following contacts.

   (a) Contact B of "X" and contact 5 of P/N M641/22-01 (U-385/U).

   (b) Contact A of "X" and contact 4 of P/N M641/22-01 (U-385/U).

   (c) Contact C of "X" and contact 3 of P/N M641/22-01 (U-385/U).

   (d) Contact E of "X" and contact 2 of P/N M641/22-01 (U-385/U).

   (e) Contact D of "X" and contact 1 of P/N M641/22-01 (U-385/U).

6. The cable assembly shall be tested in accordance with the tests listed in Table I.

NOTES:

1. All dimensions are in inches.

2. Tolerances are metal parts $\pm$.005, molded sections $\pm$.05 inches unless otherwise specified.

3. MIL-C-81863 is superseded by MIL-C-22442/21.

Preparing Activity:
Navy - AS
Project No. 5995-N120-10



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:27Z
Check the source to verify that this is the current version before use.

(B) TABLE I.

| Inspection | Requirement Paragraph | Test Paragraph | Group I Qualification Tests | Group II Quality Conformance Test 100% | Group III Sample Testing Per 4.5.1 |
|---|---|---|---|---|---|
| GROUP A (ALL SAMPLE UNITS) 1/ | | | | | |
| Visual & Mechanical Inspection | 3.1 & 3.4 | 4.6.2 | X | X | |
| Soldering | 3.4.24 | 4.6.2.1 | X | X | |
| Continuity | 3.5.3 | 4.6.5 | X | X | |
| GROUP B | | | | | |
| Dielectric Withstanding Voltage | 3.5.5 | 4.6.7 | X | | X |
| Pull Test 1/ | 3.5.7 | 4.6.9 | X | | X |
| GROUP C | | | | | |
| Durability 1/ | 3.5.13 | 4.6.15 | X | | X |
| Ozone Resistance 1/ | 3.5.14 | 4.6.16 | X | | X |
| Jacket Elongation | 3.5.15 | 4.6.17 | X | | X |
| GROUP D 1/ | | | | | |
| Temperature-Altitude 2/ | 3.6.1 | 4.7 | X | | |
| Salt Fog | 3.6.2 | 4.7 | X | | |
| Vibration | 3.6.5 | 4.7 | X | | |
| Shock | 3.6.6 | 4.7 | X | | |
| Humidity | 3.6.6 | 4.7 | X | | |
| Thermal Shock | 3.6.6 | 4.7 | X | | |

1/ Minimum tests for QPL retention (see paragraph 4.4.4).
2/ Steps 3 and 12 only.



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:27Z
Check the source to verify that this is the current version before use.