MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, AIRCRAFT AUDIO, CX-12987/AR

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the cable described herein shall consist of this document and the latest issue of specification MIL-C-22442.

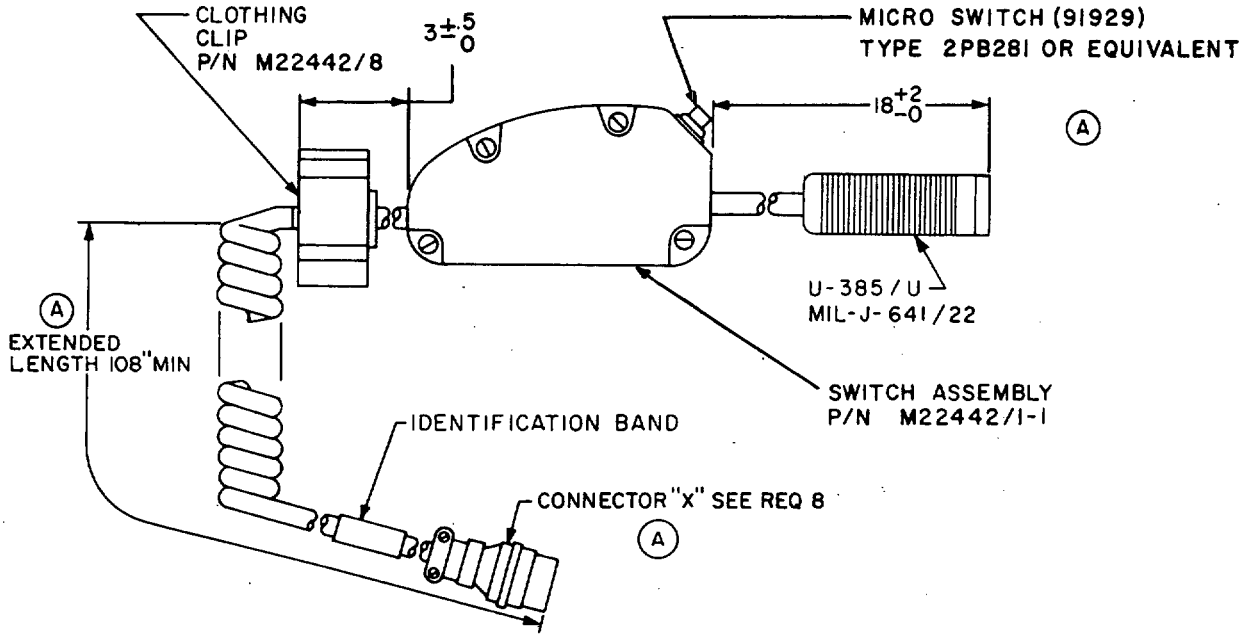


FIGURE 1 CABLE ASSEMBLY CX-12987/AR
P/N M22442/22-1

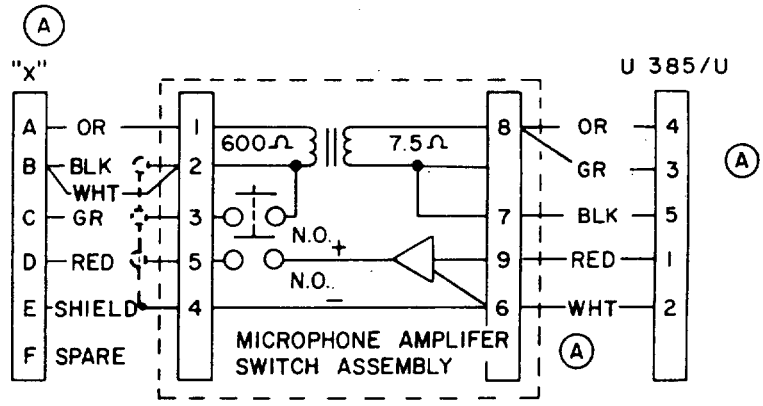


FIGURE 2 CABLE ASSEMBLY CX-12987/AR
SCHEMATIC DIAGRAM

FSC 5995

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:27Z
Check the source to verify that this is the current version before use.

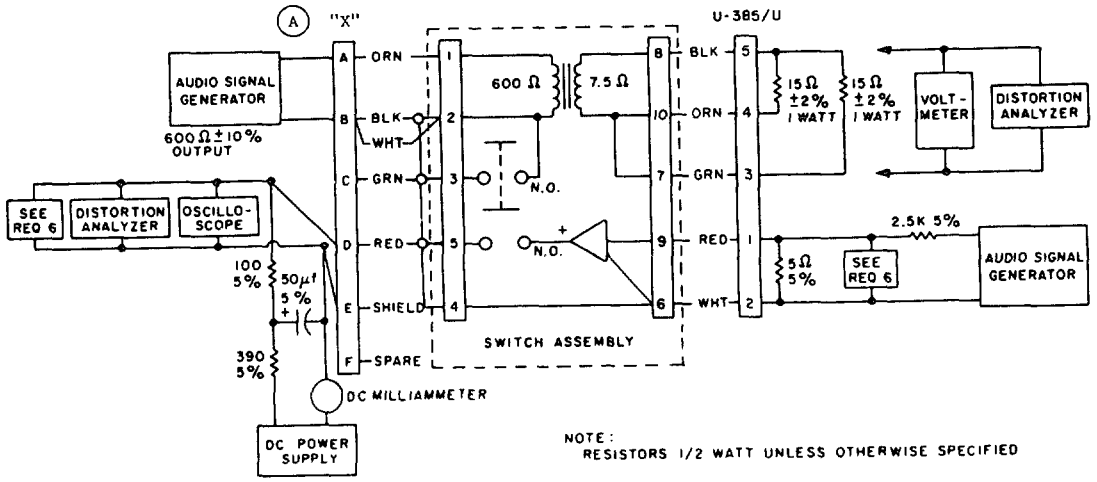


FIGURE 3. TEST CIRCUIT

APPLICABLE DOCUMENTS:

MIL-C-10392	CORD ELECTRICAL (AUDIO MINIATURE)
MS 3116	CONNECTOR, PLUG, ELECTRICAL, SERIES 1, SOLDER TYPE, STRAIGHT BAYONET COUPLING

REQUIREMENTS:

1. THE CABLE BETWEEN THE SWITCH ASSEMBLY AND THE "X" CONNECTOR SHALL BE IN ACCORDANCE WITH MIL-C-22442/3. THE CABLE BETWEEN THE SWITCH ASSEMBLY AND THE M22442/2-1 CONNECTOR SHALL BE IN ACCORDANCE WITH MIL-C-10392 TYPE WM-59/AU.
2. THE CABLE (NON-RETRACTILE) SHALL BE IN ACCORDANCE WITH MIL-C-10392 TYPE WM-59A/U.
3. THE WEIGHT OF THE CABLE ASSEMBLY SHALL NOT BE GREATER THAN 22 OUNCES.
(A) 4. THE STAY CORD SHALL BE FIRMLY ATTACHED TO THE CONNECTORS AND THE SWITCH ASSEMBLY.
5. THE AMPLIFIER SHALL BE IN ACCORDANCE WITH M22442/1-2 AND SHALL BE TESTED FOR GAIN, INPUT POWER, FREQUENCY RESPONSE, AMPLIFIER STABILITY, LINEARITY AND DISTORTION WHEN TESTED WITH THE TEST CIRCUIT HEREIN.
6. THE TRANSFORMER SHALL BE IN ACCORDANCE WITH M22442/1-3 AND SHALL BE TESTED FOR FREQUENCY RESPONSE, DISTORTION AND OVERLOAD WHEN TESTED WITH THE TEST CIRCUIT SHOWN HEREIN.
7. AN ELECTRONIC VOLTMETER WITH AN INPUT IMPEDANCE GREATER THAN 1 MEGOHM SHALL BE USED.
(A) 8. THE CONNECTOR SHALL BE BENDIX PT06A-10-6P(SR) OR BURNDY BT06AC10-6P OR EQUAL. BLACK TUBING MAY BE USED AS A BUSHING UNDER STRAIN RELIEF.
(A) 9. THE DC RESISTANCE SHALL BE AS INDICATED WHEN TESTED WITH A SUITABLE OHMETER.
   (a) CONTACT A OF "X" AND CONTACT B OF "X" 73 ± 3 OHMS.
   (b) CONTACT A OF "X" AND CONTACT C OF "X" WITH THE SWITCH DEPRESSED 73 ± 3 OHMS.
   (c) CONTACT E OF "X" AND CONTACT 2 OF U-385/U LESS THAN 2 OHMS.
   (d) CONTACT 3 OF U385/U AND CONTACT 5 of U385/U 1.8 ± .2 OHMS.
   (e) CONTACT 4 OF U385/U AND CONTACT 5 OF U385/U 1.8 ± .2 OHMS.
10. THE CABLE ASSEMBLY SHALL BE TESTED IN ACCORDANCE WITH THE TESTS LISTED IN TABLE I.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. TOLERANCES ARE ± .25 INCH UNLESS OTHERWISE SPECIFIED.
3. MIL-C-81867 IS SUPERSEDED BY MIL-C-22442/22.

Preparing Activity
Navy - AS
Project No. 5995-N110-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:27Z
Check the source to verify that this is the current version before use.

TABLE I

INSPECTION	REQUIREMENTS PARA.	TEST PARA.	GROUP I QUALIFICATION TESTS	GROUP II QUALITY CONFORMANCE TEST 100%	GROUP III SAMPLE TESTING PER 4.5.1
GROUP A (ALL SAMPLE UNITS)					
VISUAL & MECHANICAL INSPECTION	3.1, 3.4, 3.6	4.6.2	X	X	
SOLDERING	3.4.24	4.6.2.1	X	X	
DIELECTRIC WITHSTANDING VOLTAGE	3.5.5	4.6.7	X		X (A)
INSULATION RESISTANCE	3.5.4	4.6.6	X		X (A)
PULL TEST	3.5.7	4.6.9	X		X
(A) CABLE REVERIFICATION (SPECIMEN)	3.5.15	4.6.17	X	X	
DC RESISTANCE	3.5.2	4.6.4	X	X	
GROUP C (2 SAMPLES)					
OZONE RESISTANCE	3.5.14	4.6.16	X		
DURABILITY	3.5.13	4.6.15	X		
GROUP D (3 SAMPLES) 1/					
(A) IMPEDANCE	3.5.1	4.6.3	X		X
INPUT POWER REQUIREMENTS	3.5.18	4.6.20	X		
SIGNAL INPUT VOLTAGE	3.5.19	4.6.21	X	X	
AMPLIFIER STABILITY	3.5.24	4.6.22	X	X	
FREQUENCY RESPONSE	3.5.20	4.6.21	X		X
LINEARITY	3.5.21	4.6.21	X		X
DISTORTION	3.5.22	4.6.21	X		X
GAIN	3.5.23	4.6.21	X	X	
GROUP E (4 SAMPLES)					
TEMPERATURE-ALTITUDE	3.6.1	4.7	X		
SALT FOG	3.6.1	4.7	X		
VIBRATION	3.6.1	4.7	X		
EXPLOSION TEST	3.6.1	4.7	X		X

1/ TESTED IN ACCORDANCE WITH MIL-C-22442/1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:27Z
Check the source to verify that this is the current version before use.