INCH-POUND
MIL-DTL-22442/22C(AS)
5 January 1998
SUPERSEDING
MIL-C-22442/22B(AS)
2 September 1988

DETAIL SPECIFICATION SHEET

CABLE ASSEMBLY, AIRCRAFT AUDIO, CX-12987/AR

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-22442 listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

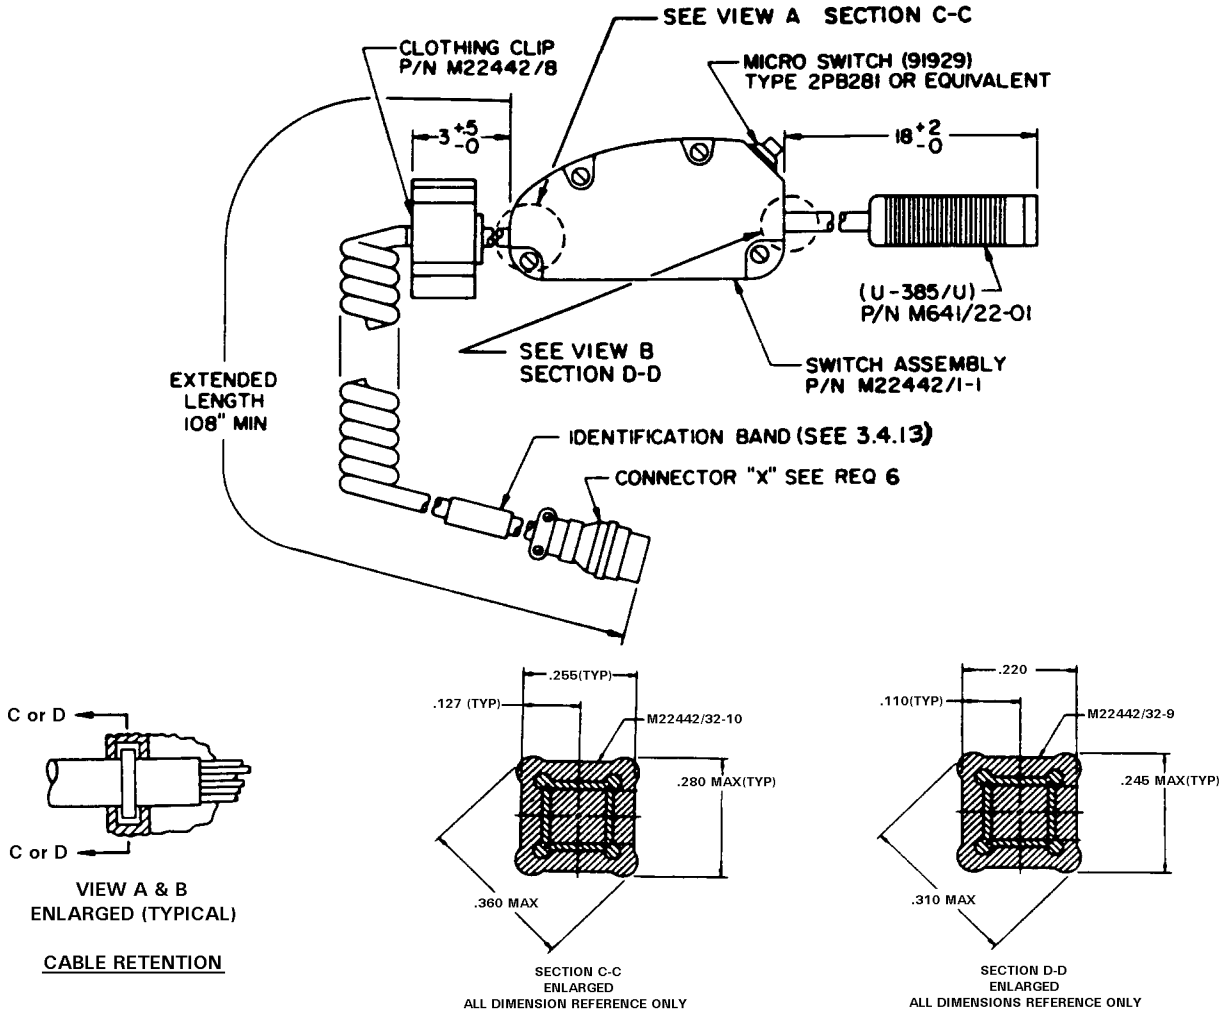


FIGURE 1. Cable Assembly CX-12987/AR P/N M22442/22-1.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:27Z
Check the source to verify that this is the current version before use.

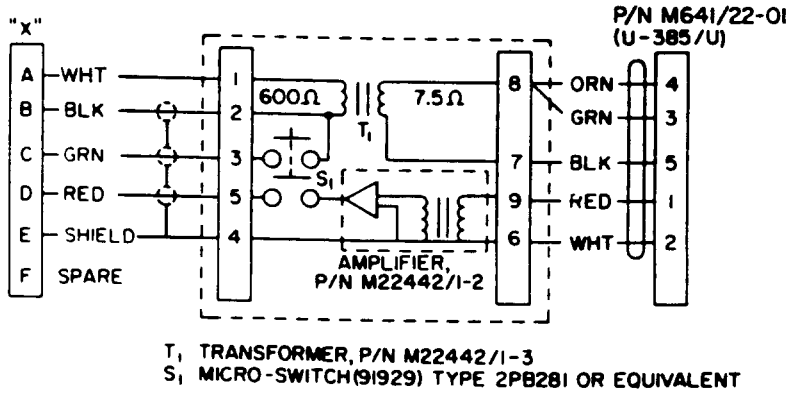


FIGURE 2. Cable assembly CX-12987/AR P/N M22442/22-1 Schematic Diagram.

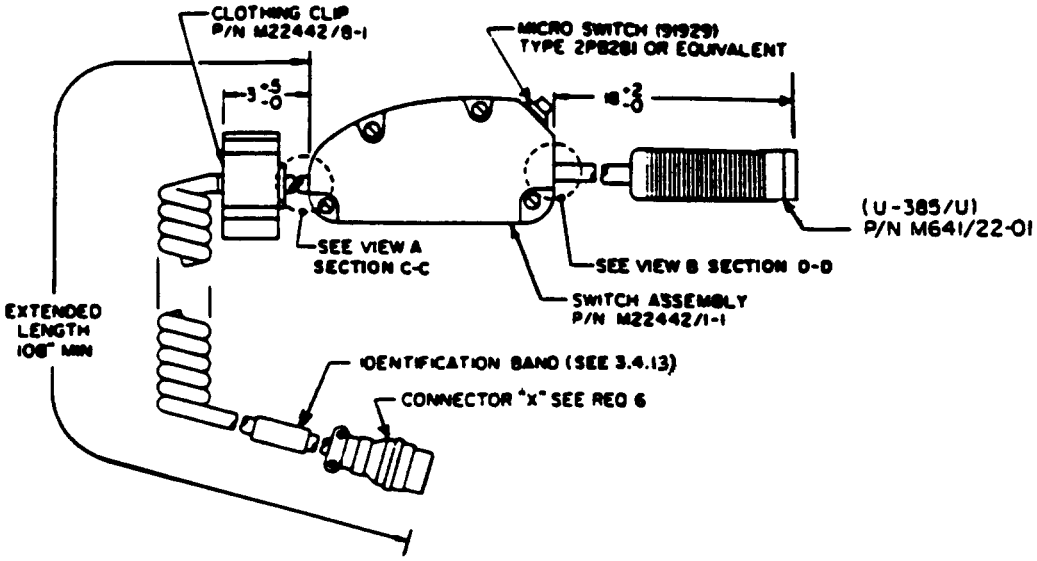


FIGURE 3. Cable assembly P/N M22442/22-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:27Z
Check the source to verify that this is the current version before use.

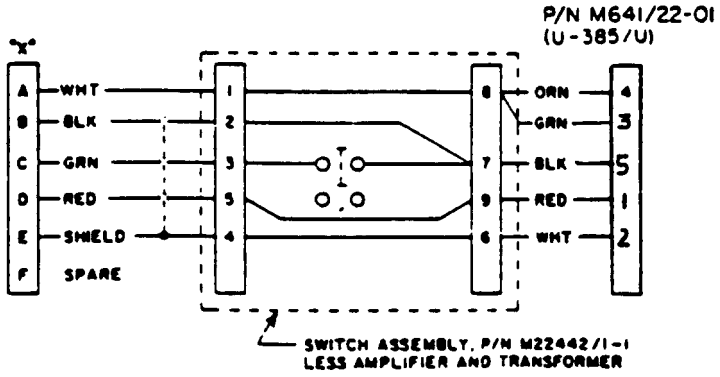


FIGURE 4. Cable assembly P/N M22442/22-2 Schematic Diagram.

APPLICABLE DOCUMENTS:

MIL-C-10392	-	Cord, Electrical (Audio, Miniature)
MIL-J-64l/22	-	Jacks, Telephone, U-385/U
MS3116	-	Connector, Plug, Electric, Series 1, Solder Type, Straight, Bayonet Coupling

REQUIREMENTS:

l. The cable between the switch assembly and the "X" connector shall be in accordance with MIL-DTL-22442/3. The cable between the switch assembly and the P/N M641/22-0l (U-385/U) connector shall be in accordance with MIL-C-10392.

2. The weight of the cable assembly shall not be greater than 20 ounces.

3. The stay cord shall be firmly attached to the connectors and the switch assembly.

4. The amplifier shall be in accordance with M22442/l-2.

5. The transformer shall be in accordance with M22442/l-3.

6. Connector "X" shall be MS3ll6Fl0-6P or functional equivalent. Black tubing may be used as a bushing under strain relief.

7. The DC resistance of the M22442/22-l cable assembly shall be as indicated when tested with an ohmmeter.

(a) Contact A of "X" and contact B of "X" less than 100 ohms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:27Z
Check the source to verify that this is the current version before use.

(b) Contact A of "X" and contact C of "X" with the switch depressed less than 100 ohms.

(c) Contact E of "X" and contact 2 of P/N M641/22-0l (U-385/U) less than 4 ohms.

(d) Contact 3 of P/N M64l/22-0l (U385/U) and contact 5 of P/N M64l/22-0l (U385/U) less than 10 ohms.

(e) Contact 4 of P/N M64l/22-01 (U385/U) and contact 5 of P/N M64l/22-0l (U385/U) less than l0 ohms.

8. The cable assembly shall be tested in accordance with the applicable tests listed in Table I.

9. The DC resistance of the M22442/22-2 cable assembly shall be as indicated when tested with an ohmmeter.

(a) Contact A of "X" and contact 4 of P/N M64l/22-0l (U-385/U) less than 4 ohms.

(b) Contact B of "X" and contact 5 of P/N M64l/22-0l (U-385/U) less than 4 ohms.

(c) Contact C of "X" and contact 5 of P/N M64l/22-0l (U-385/U) less than 4 ohms when the switch is depressed.

(d) Contact D of "X" and contact l of P/N M64l/22-0l (U-385/U) less than 4 ohms.

(e) Contact E of "X" and contact 2 of P/N M64l/22-0l (U-385/U) less than 4 ohms.

NOTES:

l. All dimensions are in inches.

2. Tolerances are metal parts ±.005, molded sections ±.05 inches unless otherwise specified.

3. MIL-C-8l867 is superseded by MIL-DTL-22442/22.

Preparing activity:
Navy - AS
(Project No. 5995-0128-07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:27Z
Check the source to verify that this is the current version before use.

TABLE I. Tests

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.4.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.5.2	X	X	
Soldering	3.4.18	4.5.2.1	X	X	
Transformer Efficiency 2/	5	10a	X		X
Transformer Input Matching Impedance 2/	6	10b	X		X
Transformer Distortion 2/	7	10c	X		X
Transformer dc Winding Resistance 2/	8	10d	X		X
Transformer Output 2/	9	10e	X	X	
Amplifier Frequency Response 2/	13	19b	X	X	
Amplifier Input Power 2/	14	19c	X		X
Amplifier Distortion 2/	15	19d	X		X
Amplifier Linearity 2/	16	19b	X		X
Amplifier Stability 2/	17	19e	X		X
Amplifier Input Impedance 2/	18	19f	X		X
Continuity	3.5.1	4.5.3	X	X	

1/ Minimum tests for QPL retention (see paragraph 4.3.3)
2/ The number indicates the requirement or test specified in MIL-DTL-22442/1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:27Z
Check the source to verify that this is the current version before use.

TABLE 1. Tests(Continued)

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.4.1
GROUP B					
Dielectric Withstanding Voltage	3.5.2	4.5.4	X		X
Gauging 1/	3.5.3	4.5.5	X		X
Pull and Twist Test 1/	3.5.4	4.5.6	X		X
Bend Relief Flexibility	3.5.5	4.5.7	X		X
GROUP C					
Low Temperature Flexibility	3.5.6	4.5.8	X		X
Durability 1/	3.5.7	4.5.9	X		X
Ozone Resistance 1/	3.5.8	4.5.10	X		X
Jacket Elongation	3.5.9	4.5.11	X		X
GROUP D 1/					
Temperature-Altitude 3/	3.6.1	4.6.1	X		
Salt Fog	3.6.2	4.6.2	X		
Vibration	3.6.4	4.6.4	X		
Humidity	3.6.5	4.6.5	X		
Thermal Shock	3.6.5	4.6.6	X		

l/ Minimum tests for QPL retention (see paragraph 4.3.3)
3/ M22442/22-l all altitude steps, M22442/22-2 steps 3 and 12 only

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:27Z
Check the source to verify that this is the current version before use.