INCH-POUND
MIL-DTL-22442/23C(AS)
5 January 1998
SUPERSEDING
MIL-C-22442/23B(AS)
2 September 1988

DETAIL SPECIFICATION SHEET

CABLE ASSEMBLY, AIRCRAFT AUDIO, CX-l2988/AR

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-22442 listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation

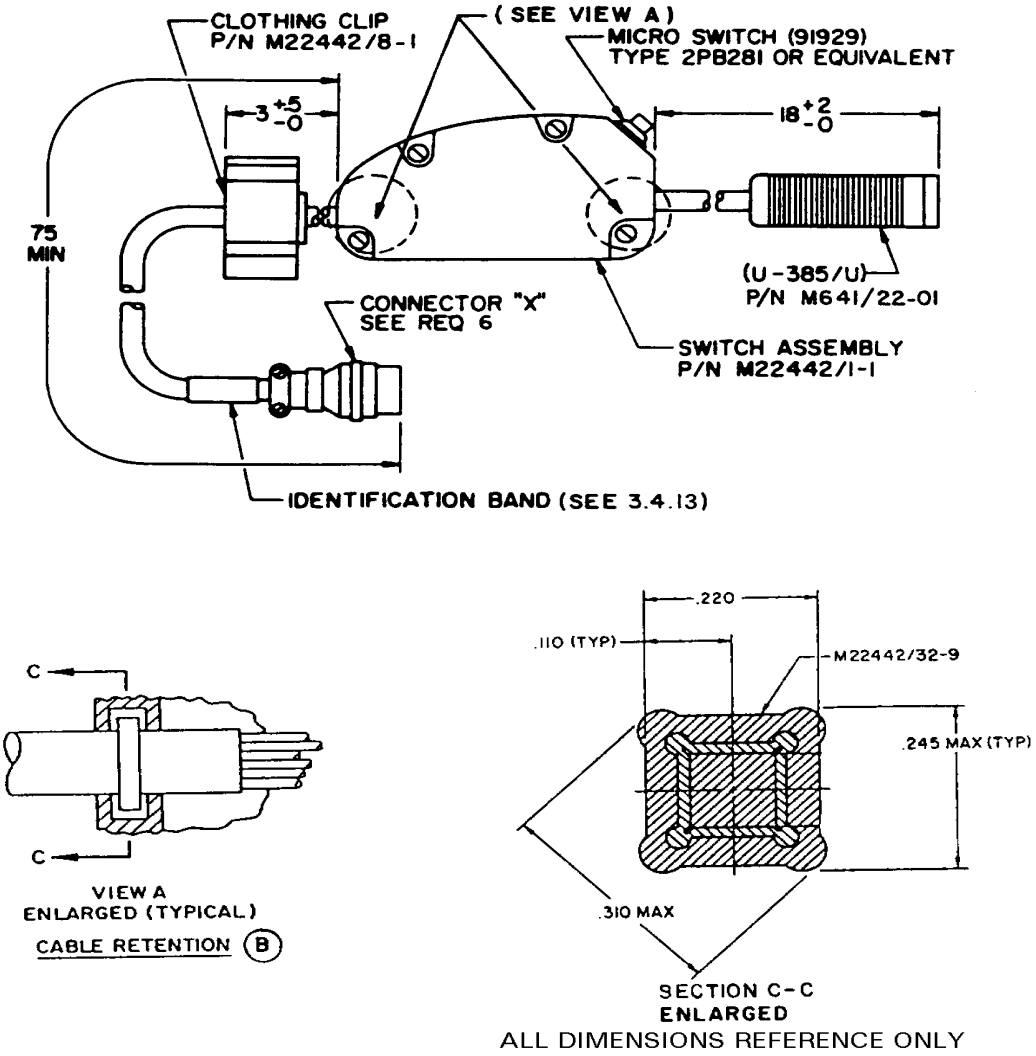


FIGURE 1. Cable Assembly CX-12988/AR P/N M22442/23-1.

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.

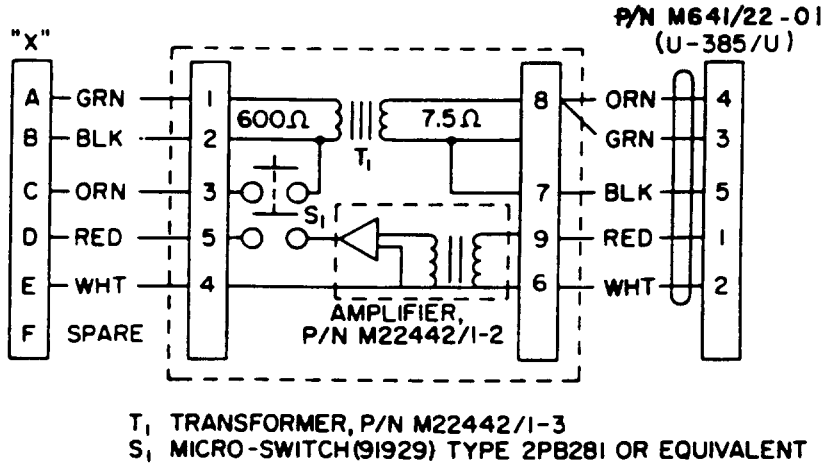


FIGURE 2. Cable Assembly CX-12988/AR Schematic Diagram.

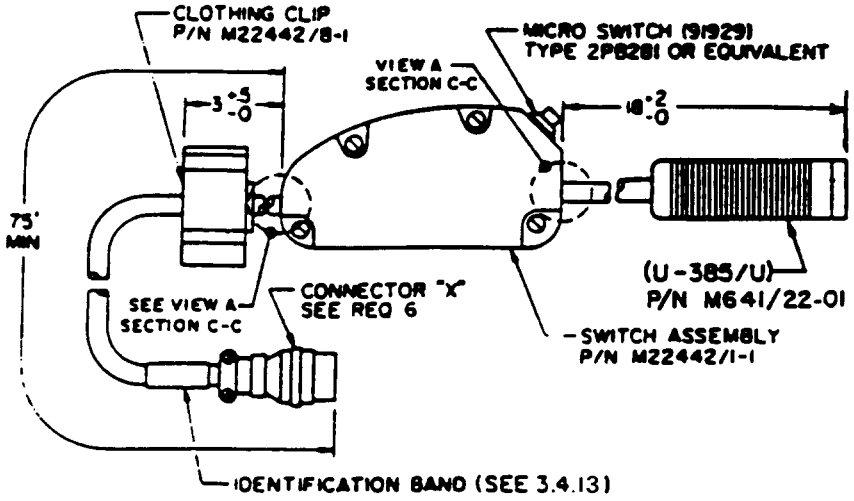


FIGURE 3. Cable assembly P/N M22442/23-2.

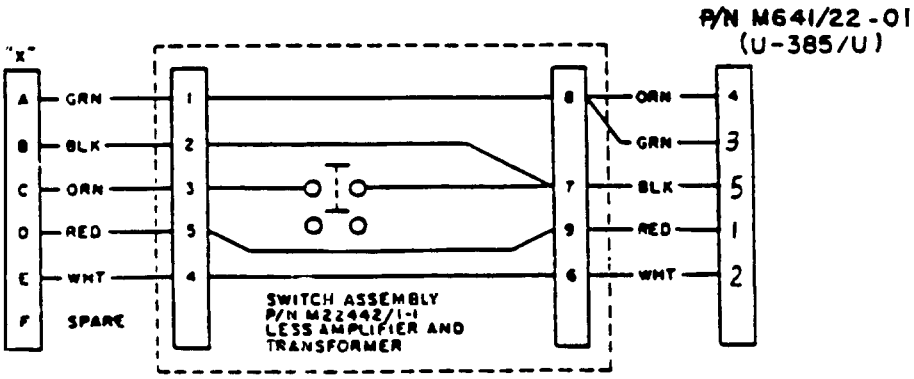


FIGURE 4. Cable assembly schematic diagram P/N M22442/23-2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.

APPLICABLE DOCUMENTS:

MIL-C-l0392 - Cord, Electrical (Audio, Miniature)

MIL-J-64l/22 - Jacks, Telephone, U-385

MS3116 - Connector, Plug, Electric, Series 1, Solder Type, Straight, Bayonet Coupling

REQUIREMENTS:

*1. The cable (cord) shall be in accordance with MIL-C-10392 Type WM-59A/U or equal.

2. The weight of the cable assembly shall not be greater than 49 ounces.

3. The stay cord shall be firmly attached to the connectors and the switch assembly.

4. The amplifier shall be in accordance with M22442/l-2.

5. The transformer shall be in accordance with M22442/l-3.

6. Connector "X" shall be MS3ll6Fl0-6P or functional equivalent. Black tubing may be used as a bushing under strain relief.

7. The DC resistance of the M22442/23-l cable assembly shall be as indicated when tested with an ohmmeter.

(a) Contact A of "X" and contact B of "X" less than 100 ohms.

(b) Contact A of "X" and contact C of "X" with the switch depressed less than 100 ohms.

(c) Contact E of "X" and contact 2 of P/N M64l/22-0l (U-385/U) less than 4 ohms.

(d) Contact 5 of M64l/22-0l (U385/U) and contact 4 of P/N M64l/22-0l (U385/U) less than 10 ohms.

(e) Contact 5 of P/N M64l/22-0l (U385/U) and contact 3 of P/N M64l/22-0l (U385/U) less than 10 ohms.

(f) Contact 3 of P/N M64l/22-0l (U-385/U) and contact 4 of P/N M64l/22-0l (U-385/U) less than 4 ohms.

8. The cable assembly shall be tested in accordance with the applicable tests listed in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.

9. The DC resistance of the M22442/23-2 cable assembly shall be as indicated when tested with an ohmmeter.

(a) Contact A of "X" and contact 4 of P/N M64l/22-0l (U-385/U) less than 4 ohms.

(b) Contact B of "X" and contact 5 of P/N M64l/22-0l (U-385/U) less than 4 ohms.

(c) Contact C of "X" and contact 5 of P/N M64l/22-0l (U-385/U) less than 4 ohms when the switch is depressed.

(d) Contact D of "X" and contact l of P/N M64l/22-0l (U-385/U) less than 4 ohms.

(e) Contact E of "X" and contact 2 of P/N M64l/22-0l (U-385/U) less than 4 ohms.

NOTES:

l. All dimensions are in inches.

2. Tolerances are metal parts ±.005, molded sections ±.05 inches unless otherwise specified.

3. MIL-C-8l896 is superseded by MIL-DTL-22442/23.

4. Drawing 765AS286 was superseded by MIL-DTL-22442/23.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notation and relationship to the last previous issue.

Preparing activity:
Navy - AS
(Project No. 5995-0128-33)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.

TABLE I. Tests

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.4.1
GROUP A (ALL SAMPLE UNITS) 1/					
Visual & Mechanical Inspection	3.1 & 3.4	4.5.2	X	X	
Soldering	3.4.18	4.5.2.1	X	X	
Transformer Efficiency 2/	5	10a	X		X
Transformer Input Matching Impedance 2/	6	10b	X		X
Transformer Distortion 2/	7	10c	X		X
Transformer dc Winding Resistance 2/	8	10d	X		X
Transformer Output 2/	9	10e	X	X	
Amplifier Frequency Response 2/	13	19b	X	X	
Amplifier Input Power 2/	14	19c	X		X
Amplifier Distortion 2/	15	19d	X		X
Amplifier Linearity 2/	16	19b	X		X
Amplifier Stability 2/	17	19e	X		X
Amplifier Input Impedance 2/	18	19f	X		X
Continuity	3.5.1	4.5.3	X	X	

1/ Minimum tests for QPL retention (see paragraph 4.3.3)
2/ The number indicates the requirement or test specified in MIL-DTL-22442/1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.

TABLE 1. Tests (continued)

Inspection	Requirement Paragraph	Test Paragraph	Group I Qualification Tests	Group II Quality Conformance Test 100%	Group III Sample Testing Per 4.4.1
GROUP B					
Dielectric Withstanding Voltage	3.5.2	4.5.4	X		X
Gauging 1/	3.5.3	4.5.5	X		X
Pull and Twist Test 1/	3.5.4	4.5.6	X		X
Bend Relief Flexibility	3.5.5	4.5.7	X		X
GROUP C					
Low Temperature Flexibility	3.5.6	4.5.8	X		X
Durability 1/	3.5.7	4.5.9	X		X
Ozone Resistance 1/	3.5.8	4.5.10	X		X
Jacket Elongation	3.5.9	4.5.11	X		X
GROUP D 1/					
Temperature-Altitude 3/	3.6.1	4.6.1	X		
Salt Fog	3.6.2	4.6.2	X		
Vibration	3.6.4	4.6.4	X		
Humidity	3.6.5	4.6.5	X		
Thermal Shock	3.6.5	4.6.6	X		

l/ Minimum tests for QPL retention (see paragraph 4.3.3)
3/ M22442/23-l all altitude steps, M22442/23-2 steps 3 and 12 only

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:28Z
Check the source to verify that this is the current version before use.