MILITARY SPECIFICATION SHEET

(A) CABLE ASSEMBLY, RADIO FREQUENCY (AIRCRAFT AUDIO), CONNECTOR

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connector described herein shall consist of this document and the latest issue of specification MIL-C-22442.

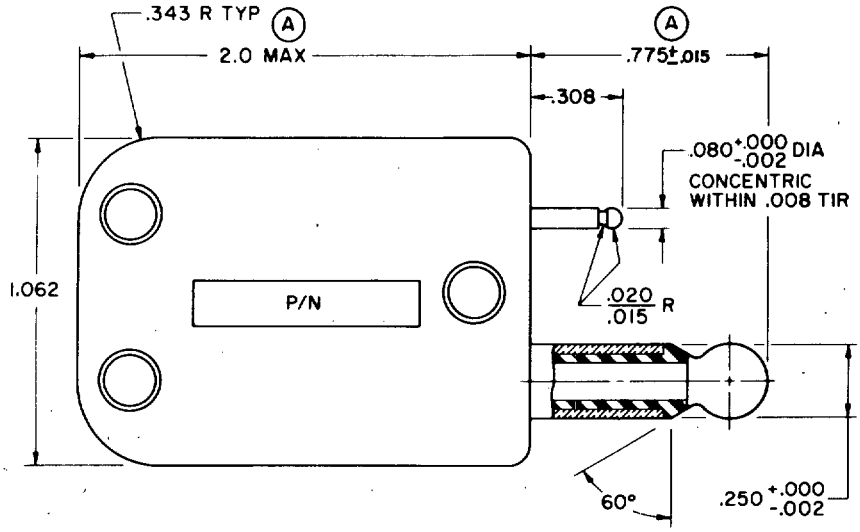


TABLE I.

Part Number	
M22442/5-1 (U-75/U)	Without transformer
M22442/5-2	With transformer
M22442/5-3	With 2 transformers


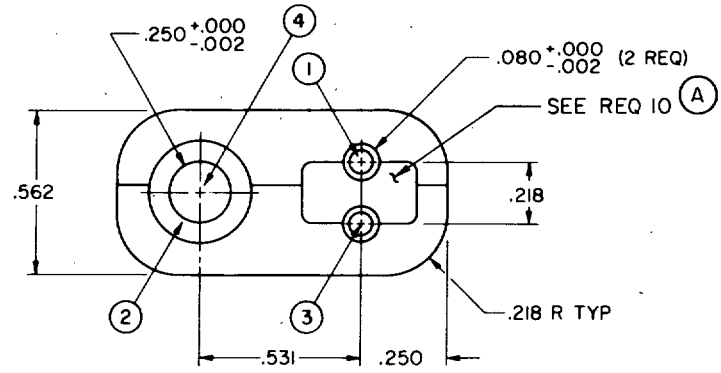


FIGURE 1. Connector P/N M22442/5-1 (U-75/U) and P/N M22442/5-2.

AMSC N/A FSC 5995

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:23Z
Check the source to verify that this is the current version before use.

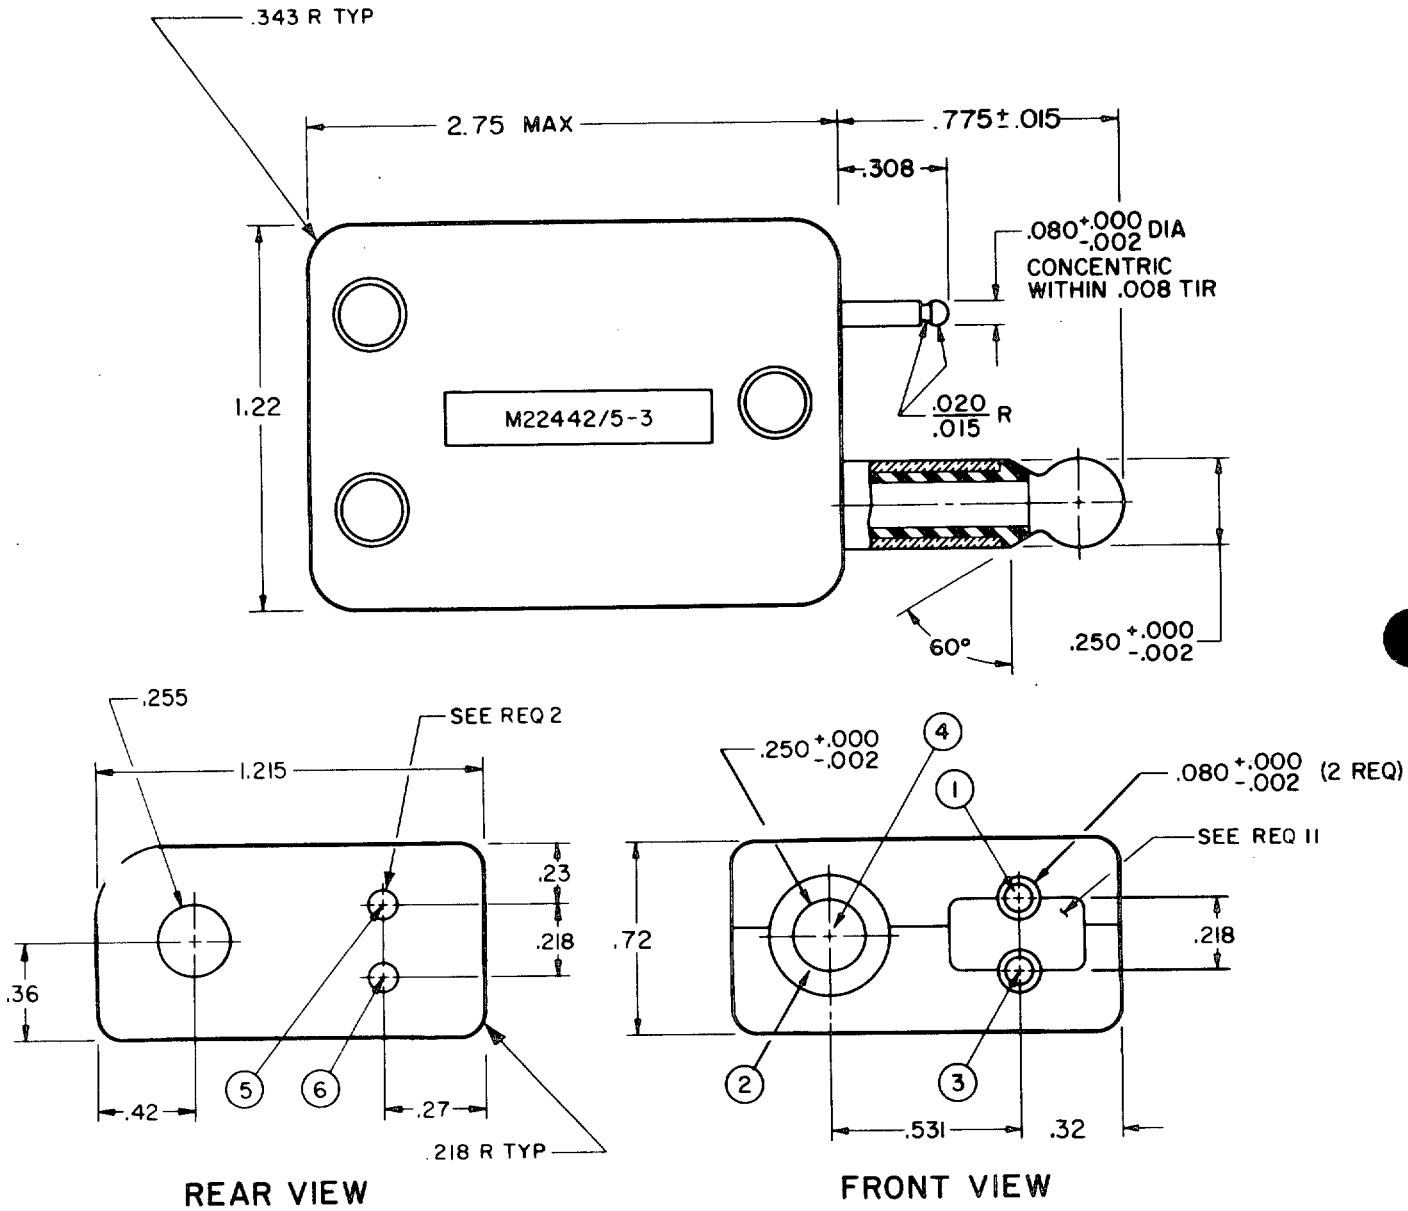

(A)

FIGURE 2. Connector P/N M22442/5-3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:23Z
Check the source to verify that this is the current version before use.

APPLICABLE DOCUMENTS:

MIL-J-641	Jacks, Telephone, General Specification for
MIL-P-642	Plugs, Telephone and Accessory Screws, General Specification for

AIR FORCE DRAWINGS:

57B12662	Connector, Plug Electrical U-173/U
57B12664	Tip - Electrical, Plug Connector

REQUIREMENTS:

1. Each connector shall be capable of mating with P/N M22442/4-1 (U-61/U).

2. The rear of the M22442/5-3 connector shall contain a jack capable of mating with Air Force Drawings 57B123662 and 57B12664 which govern the requirements of connector U-173/U.

3. Sampling and testing procedures shall be in accordance with MIL-P-642.

4. Each connector shall meet the following requirements when tested in accordance with MIL-P-642.

   a. Visual and mechanical.

   b. Dielectric strength.

   c. Contact resistance.

   d. Insertion and withdrawal force. 1/

   e. Salt spray.

   f. Insulation resistance.

   g. Moisture resistance.

5. The insertion force shall be 8 lbs maximum. The withdrawal force shall be 6 ± 2 lbs. 1/

6. After the spring life test the withdrawal force shall be greater than 60 percent of the withdrawal force measured prior to test. 1/

(A) 7. The connector insulating materials shall be made of black plastic that shall meet the requirements of the general specification.

1/ These requirements apply to the rear of the M22442/5-3 connector only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (Continued)

(A) 8. Plating of metal parts shall be sufficient to prevent corrosion of the base metal.

9. The M22442/5-2 connector shall contain an impedance matching transformer in accordance with M22442/1-3.

10. The M22442/5-3 connector shall each contain two impedance matching transformers in accordance with M22442/1-7.

(A) 11. The pins shall be capable of moving slightly in any direction to ensure compatibility with the mating connector.

(A) 12. Each connector shall meet the spring life requirement when tested in accordance with MIL-J-641. 1/

1/ These requirements apply to the rear of the M22442/5-3 connector only.

NOTES:

1. All dimensions are in inches.

2. Tolerances are unless otherwise specified:

   Metal Parts ± .005
   Molded Sections ± .05

3. This specification supersedes USAF Drawing 46D40934.

Preparing Activity:
Navy - AS
Project No. 5995-N120-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:23Z
Check the source to verify that this is the current version before use.