INCH-POUND
MIL-DTL-22442/7(AS)
9 April 2004

DETAIL SPECIFICATION SHEET

CABLE ASSEMBLY, AIRCRAFT AUDIO, CONNECTOR TJ-106

This specification sheet is approved for use by the Naval Air Systems Command, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-22442

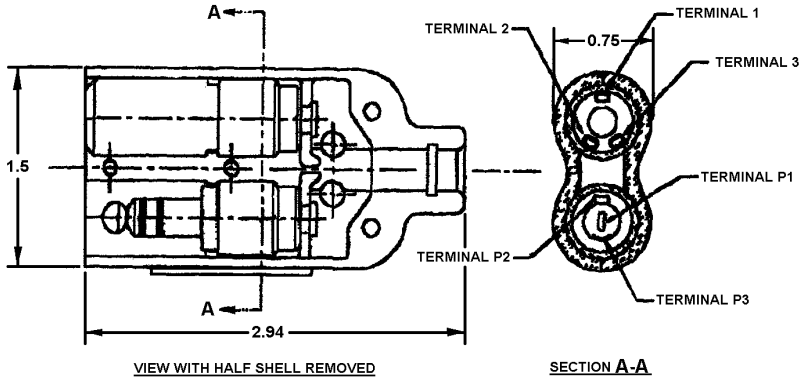

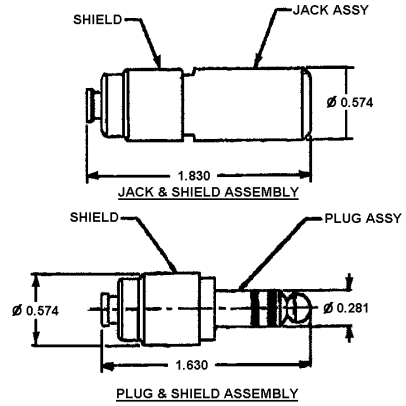

FIGURE l. Connector P/N M22442/7 (TJ-106)

AMSC N/A

FSC 5995

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:24Z
Check the source to verify that this is the current version before use.

APPLICABLE DOCUMENTS:

MIL-J-64l	-	Jacks, Telephone, General Specification for
MIL-P-642	-	Plugs, Telephone and Accessory Screws, General Specification for

REQUIREMENTS:

1. Sampling and testing procedures shall be in accordance with MIL-P-642.

2. Each connector shall meet the following requirements when tested in accordance with MIL-P-642.

   a. Visual and mechanical.

   b. Dielectric strength.

   c. Contact resistance.

   d. Insertion and withdrawal force. (see 3)

   e. Salt spray.

   f. Insulation resistance.

   g. Moisture resistance.

3. The insertion force shall be 8 lb. maximum. The withdrawal force shall be 6 $\pm$ 2 lb.

4. After the spring life test the withdrawal force shall be greater than 60 percent of the withdrawal force measured prior to test.

5. The connector insulating materials shall be made of black plastic that shall meet the requirements of the general specification.

6. Plating of metal parts shall be sufficient to prevent corrosion of the base metal when tested in accordance with MIL-J-641.

7. The pins shall be capable of moving slightly in any direction to ensure compatibility with the mating connector.

8. Each connector shall meet the spring life requirement when tested in accordance with MIL-J-64l.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:24Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.

2. Tolerances are as follows unless otherwise specified:

   Metal Parts ± .005

   Molded Sections ± .05

3. The parts specified on this specification sheet are for use on completed and tested cable assemblies. Qualification of individual parts and components is not required.

Preparing activity:
Navy - AS
(Project No. 5995-0145)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at www.dodssp.daps.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T12:24Z
Check the source to verify that this is the current version before use.