INCH-POUND

MIL-B-23755D
29 March 1991
SUPERSEDING
MIL-B-23755C
10 August 1981

MILITARY SPECIFICATION

BRAKE MACHINES, SHEET METAL, MANUALLY OPERATED, STANDARD AND BOX-PAN TYPE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers two types of hand operated bending brakes use for bending sheet metal with equipment and accessories specified herein.

1.2 Classification. The machines shall be of the following types and classes. The type, class, and size to be furnished shall be as specified (see 3.5 and 6.2).

Type I - Standard Brakes

Class 1 - Floor Mounted

Class 2 - Bench Mounted

Type II - Box-Pan Brakes

Class 1 - Floor Mounted

Class 2 - Bench Mounted

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Industrial Plant Equipment Center, ATTN: DIPEC-SSG, 2163 Airways Blvd. Memphis, TN 38114-5051, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3441

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:46Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-M-18058 - Machinery, Metal and Woodworking, Packaging of.

STANDARDS

FEDERAL

FED-STD-H28 - Screw Thread Standards for Federal Services.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

CODE OF FEDERAL REGULATIONS (CFR)

U.S. DEPARTMENT OF LABOR, OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION (OSHA)

29 CFR 1910 - Occupational Safety and Health Standards.

(Application for copies should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402-0001.)

(Copies of specifications, standards, handbooks, drawings, publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contract activity.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:46Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), one conplete machine shall be subjected to first article inspection (see 6.4) in accordance with 4.3.

3.2 Design. The machine shall be new (not a prototype) and one of the manufacturer s current production models capable of operations in accordance with the requirements herein. The machine shall include all components, parts, and features necessary to meet the performance requirements specified herein. All parts subject to wear, breakage, or distortion shall be readily accessible for adjustment, replacement, or repair. The machine shall be manually operated and designed to accomplish bending by the upward movement of the bending leaf past the top leaf nose bar. The type I brakes are equipped with a full length nose bar and are capable of forming straight bends of a length up to the full length of the nose bar of the brake. Type II brakes, when equipped with a full length nose bar or a conplete set of removable fingers, are capable of forming straight bends (as described for type I brakes), and in addition, when equipped with removable fingers, are capable of forming multiple intersecting bends such as those encountered when forming boxes, pans and cabinets.

3.2.1 Reclaimed Materials. The machine may contain reclaimed materials to the maximum extent possible provided materials will not jeopardize the intended use, performance, or design life of the machine. Reclaimed materials shall have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used, rebuilt, or remanufactured end products are allowed under this specification.

3.2.2 Controls. All mechanical operating controls shall be located convenient to the operator’s work station.

3.2.3 Safety and health requirements. All parts, components, mechanisms, and assemblies furnished on the machine, whether or not specifically required herein, shall conform with all requirements of OSHA 29 CFR 1910. Additional safety and health requirements shall be as specified (see 6.2).

3.2.3.1 Covers guards and other safety devices. Covers, guards, or other safety devices normally furnished as standard on the manufacturer’s commercial machine supplied to the commercial market shall be provided for the point of operation and all other parts of the machine that present safety hazards. If point-of-operation guarding is influenced by workpiece size and configuration the procuring activity shall provide part design data to the supplier of the machine (see 6.2). All special guarding shall meet OSHA 29 CFR 1910. The safety devices shall not interfere with the operation of the machine. All guards shall allow access to the guarded part(s).

3.2.4 Mercury restriction. The machine shall not contain mercury or mercury compounds nor be exposed to free mercury during manufacture.

3.2.5 Asbestos restriction. Asbestos and materials containing asbestos shall not be used on or in the machine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:46Z
Check the source to verify that this is the current version before use.

3.2.6 Environmental protection. During the manufacture, operation, service, transportation, or storage of the machine, and its components materials hazardous to the ecological system as prohibited by Federal, state, or local statutes in effect on the date of the contract shall not be used or emitted.

3.2.7 Lubrication. Means shall be provided to ensure lubrication for all moving parts. All oil holes, grease fittings, and filler caps shall be accessible.

3.2.8 Interchangeability. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. All parts shall be manufactured to such standards as will permit replacement or adjustment without notification of parts or machine.

3.3 Construction. The machine shall be constructed of parts which are new, without defects, and free of repairs. The structure shall withstand all forces encountered during operation of the machine to its maximum rating and capacity without permanent distortion or failure.

3.3.1 Castings and forgings. All castings and forgings shall be free of defects, scale, and mismatching. No processes such as welding, peening, plugging, or filling with solder or paste shall be used for reclaiming any defective part. Such processes may be used only for enhancing surface finish and appearance.

3.3.2 Fastening devices. All fasteners shall be installed to prevent change of tightness. Fastening devices subject to removal or adjustment shall not be permanently installed.

3.3.3 Surfaces. All surfaces shall be clean and free of harmful or extraneous materials. All edges shall be either rounded or beveled unless sharpness is required to perform a necessary function. Except as otherwise specified herein (see 6.2), the condition and finish of all surfaces shall be in accordance with the manufacturer's commercial practice.

3.3.4 Welding, brazing, or soldering. Welding, brazing, or soldering shall be employed only where specified in the original design. None of these operations shall be employed as a repair measure for any defective part.

3.3.5 Painting. Unless otherwise specified (see 6.2), the paint color and application shall be in accordance with the manufacturer's commercial practice.

3.3.6 Threads. All threaded parts used on the machine and its related attachments and accessories shall conform to FED-STD-H28 and the applicable "Detailed Standard" section referenced therein.

3.3.7 Gears. All gears shall be constructed from a material suitable for the intended purpose. All drive gears shall have the hardness, surface finish, and toughness that will enable the gear to transmit full rated torque without gear damage, failure, or premature deterioration and wear.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:46Z
Check the source to verify that this is the current version before use.

3.4 Components. The machine shall consist of not less than a base, bending leaf, top leaf, and nose bar.

3.4.1 Base. The base of the machine shall have adequate strength and rigidity to maintain all parts in alignment when bending sheet metal of full capacity length ad thickness as specified in tables I or II for the type machine required. The base shall support the bending leaf (apron), top leaf, their operating mechanisms, and other related equipment. The upper surface of the base shall support the bottom bar which shall extend across the full length of the base. The bottom bar shall serve as the lower clamping surface for clamping the workpiece in position, and shall be constructed of a grade of steel suitable for the purpose. When specified (see 6.2), the bottom bar on class 1 brakes shall conform to the above requirements and in addition, shall be removable for reconditioning or replacement. The base shall have sturdy pivot brackets that support the bending leaf and allow the bending leaf to pivot during bending operations. Means shall be provided for securely fastening the base to the floor or foundation on class 1 brakes, and to a bench or stand on class 2 brakes.

3.4.2 Bending leaf (apron). The brake shall have a bending leaf, or apron, that pivots on the pivot brackets mounted on the base. The pivot range shall meet or exceed the "angle of bend" requirements of 3.6. The bending leaf on all class 1 brakes shall be reinforced with truss rods and braces to provide additional strength and rigidity. Means for tension adjustment for the truss rods shall be provided. The top edge of the bending leaf shall have a replaceable angle bar securely attached to and extending across the entire length of the bending leaf. The angle bar shall strengthen the bending leaf and shall be the member which actually contacts the workpiece during the bending operation. Means shall be provided for aligning the top edge of the bending leaf with the bottom bar mounted on the base. The bending leaf shall have not less than two handles that allow the operator to pivot the bending leaf throughout the entire range of the "angle of bend" requirements of 3.6. The handles shall have adequate strength and rigidity to withstand the applied force required to bend sheet metal of full capacity length and thickness specified in tables I and II, as applicable to the machine being procured. The bending leaf of class 1 brakes shall be equipped with two or more removable counterweights which reduce the manual force required to bend the workpiece. Means shall be provided to adjust the position of the counterweights on their supports. The bending leaf with the angle bar, on all brakes shall have minimum reverse bend capability of 1/4 inch. When the angle bar is removed for bending, the required capacity may then be reduced by 4 gauge thicknesses.

3.4.3 Top leaf. All machines covered herein shall have a top leaf that clamps the workpiece to the bottom bar mounted on the machine base. The top leaf shall be reinforced and braced to provide additional strength, rigidity, and alignment. Truss rods with tension adjustments shall be provided on all class 1 brakes. The top leaf shall be supported on sturdy pivots attached to the base. The pivots shall allow the top leaf to pivot during the clamping operation, and shall be adjustable, front to back, for bending clearance and to provide for alignment with the bottom bar. Clamping devices with adjusting mechanisms for metal thickness and clamping pressure throughout the length of

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:46Z
Check the source to verify that this is the current version before use.

the brake shall be provided at each end of the brake. The clamping devices shall securely clamp the workpiece between the upper beam jaw, or nose bar, and the lower beam jaw, or bottom bar, without slippage, when bending sheet metal up to the thickness and length specified under "Capacity" in table I or II. On brakes over four feet bending length, the clamping devices shall be independently operated at each end of the brake. The top leaf shall be constructed to provide a mounting surface for a full length, removable nose bar conforming to the requirements of 3.4.3.2.

3.4.3.1 Top leaf (Type II machines). In addition to meeting the requirements of 3.4.3, the top to type II (Box-Pan) brakes shall accommodate removable and rearrangeable fingers of various width extending across the entire length of the top leaf. The fingers shall fit into a groove and shall be supported by a ledge on the top leaf. The fingers shall be securely held in position during the bending operation. Adapters, screws, bolts, and nuts for mounting and aligning the fingers shall be furnished. A complete set of random width fingers of the type that forms sharp bends shall be furnished with each brake. The set of fingers shall form bends of the following lengths and increments:

Type II, class 1:
All sizes - 3" length to full bending length specified in Table II, in 1" increments

Type II, class 2:
All sizes - 3/4" length to full bending length specified in Table II, in 1/4" increments

Each finger shall be permanently and legibly marked to indicate its width in inches and fractions of an inch. The finger length (dimension from tip of nose to front edge of top leaf) shall be one of the finger lengths selected from table II, as specified (see 6.2).

3.4.3.2 Nose bar. Unless otherwise specified (see 6.2), type I brakes shall have a nose bar extending across the entire length of the top leaf, and of the type suitable for forming sharp bends. Unless otherwise specified (see 6.2), each finger of type II brakes shall have a nose bar extending across the entire width of each finger and of the type suitable for forming sharp bends. All nose bars and all fingers, regardless of type, shall be made of wear resistant alloy steel having adequate strength to withstand all forces encountered while the machine is bending the maximum rated capacity length and thickness of sheet metal specified in table I or II, as applicable.

3.4.3.3 Worklight. When specified (see 6.2), a worklight shall be provided. The light shall have a protective shield, an on-off switch, and shall be adjustable to reflect maximum light on the work area. If a built in lighting system is provided, the adjustable light described above shall not be required.

3.5 Size and capacity. Unless otherwise specified (see 6.2), the machine shall meet the requirements of tables I or II for the type, class, and size specified. Machine size and capacity shall be not less than the stated requirements of the type, class, and size ordered.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:46Z
Check the source to verify that this is the current version before use.

TABLE I. Type I, Standard brakes, sizes and capacities.

Class 1 - Floor mounted			Class 2 - Bench mounted		
Size	Capacity		Size	Capacity	
	Workpiece bending length, (ft)	Workpiece thickness, (USS gauge)		Workpiece bending length, (ft)	Workpiece thickness, (USS gauge)
412	4	12	216	2	16
414	4	14			
416	4	16	316	3	16
612	6	12			
614	6	14			
812	8	12			
814	8	14			
816	8	16			
818	8	18			
1012	10	12			
1014	10	14			
1016	10	16			
1218	12	18			

TABLE II. Type II, Box-pan brakes, sizes and capacities.

Class 1 - Floor mounted				Class 2 - Bench mounted			
Size	Capacity			Size	Capacity		
	Workpiece bending length, (ft)	Workpiece thickness, (USS gauge)	Finger length, (in)		Workpiece bending length, (ft)	Workpiece thickness, (USS gauge)	Finger length, (in)
412	4	12	6 or 8	216	2	16	3
414	4	14	6 or 8				
612	6	12	6	316	3	16	3
812	8	12	6 or 8				
1012	10	12	6 or 8				
1014	10	14	6 or 8				

NOTE: Requirements are not less than those shown.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:46Z
Check the source to verify that this is the current version before use.

3.5.1 Physical size limitations. When specified (see 6.2.), the physical size of the machine shall not exceed the height, width, and length restrictions specified by the procuring activity.

3.6 Performance. The machine shall be capable of forming mild steel of not less than 55,000 pounds per square inch (PSI) tensile strength in workpiece sizes ranging up to the rated capacity for the machine specified. These operations shall be performed to the accuracies and requirements stated in 3.6.1 thru 3.6.6. The bends shall be performed with nosebars or fingers in position. There shall be no slip or creep of the workpiece during the bending process.

3.6.1 Angle of bend. All machines shall be capable of forming bends within the range up to 0 degrees to 135 degrees, measured from the horizontal plane (180 degrees to 45 degrees included angle).

3.6.2 Bend radius. The machine shall be capable of making sharp bends having an inside radius not more than twice the thickness of the metal being bent. The machine shall also be capable of bending larger radii by making "freehand" multiple partial bends, or by using specially radiused nose bars.

3.6.3 Bending accuracy. The machine shall be capable of forming 90 degree bends to an accuracy of +2 degrees.

3.6.4 Repeatability. Using the bending leaf stops, the machine shall be capable of making repetitive bends to an accuracy of ±2 degrees.

3.6.5 Narrow flanges. The machine shall be capable of forming full length flanges having a width of 1 inch or wider. The flanges shall be uniform in height within ±0.015 inch for the full length of the workpiece.

3.6.6 Box-Pan brakes (Type II machine only). In addition to the above, type II brakes shall be capable of forming multiple bends in sheet metal having previously formal side flanges, as required during box and pan forming. Box and pan brakes shall also be capable of forming tubular shapes, when using special nose bars that extend between appropriately spaced fingers.

3.6.7 Additional performance requirements. Performance features required in addition to, or in lieu of, the requirements herein shall be as specified and fully described (see 6.2).

3.7 Standard equipment. All standard equipment normally provided with the manufacturer's commercial machine shall be furnished, including the following:

a. An adjustable stop gage for forming duplicate bends.

b. All maintenance tools normally furnished by the manufacturer for the brake machine.

3.8 Optional and accessory equipment. Optional and accessory equipment shall be furnished as specified and fully described (see 6.2). The equipment provided shall be functional without requiring modification of the equipment or machine.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:46Z
Check the source to verify that this is the current version before use.

3.9 Repair parts. Required repair parts shall be furnished as specified (see 6.2).

3.10 Marking on charts, and plates. All words on the machine including all charts, plates, and re1ated attachments shall be in the English language. Characters shall be permanently marked in boldface on a contrasting background. All plates shall be corrosion resistant

3.10.1 Lubrication plate or chart. When specified (see 6.2) a lubrication plate or chart shall be attached to each machine. If a chart is furnished it shall be placed in a transparent plastic folder, or permanently sealed between clear plastic sheets. Unless otherwise specified (see 6.2) the information provided on the chart or plate shall be as listed below.

Points of lubricant application
Type of lubricant
Servicing interval
Military of Federal specification for each
lubricant (if applicable)

3.10.2 Nameplate. A nameplate shall be securely attached to each machine Unless otherwise specified (see 6.2), the nameplate shall contain the information listed below.

Nomenclature
Manufacturer’s name
Maufacturer’s model designation
Manufacturer’s serial number
Contract number or order number
National stock number or plant equipment code
Date of manufacture
Capacity, maximum workpiace thickness

3.11 Workmanship. Workmanship of the machine and its accessories shall meet all requirements specified herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the Performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspections set forth in this specification shall become a part of the contractor’s overall inspection system or quality program.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:46Z
Check the source to verify that this is the current version before use.

The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).

b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article inspection is required, it shall be applied to the first article submitted in accordance with 3.1. Unless otherwise specified (see 6.2), first article inspection shall consist of the examination in 4.5 and all tests in 4.6. The machine shall pass the examination and all tests to be accepted.

4.4 Quality conformance inspection. Quality conformance inspection shall be applied to each machine prior to being offered for acceptance under the contract. Unless otherwise specified (see 6.2), quality conformance inspection shall consist of the examination in 4.5, the tests in 4.6, and the inspection in 4.7. The machine shall pass the examination, all tests, and the inspection to be accepted.

4.5. Examination. Each machine shall be examined to determine compliance with all requirements of this specification.

4.6 Tests.

4.6.1 Operational test. The machine shall be operated through a conplete cycle to determine proper operation of all moving parts. The bending leaf shall be operated through the range of 0 degrees to 135 degrees. There shall be no evidence of binding or excess motion. Proper operation of bending leaf, adjusting mechanisms, clamping devices, counterweights, and accessories shall be verified during the trial period.

4.6.2 Performance test. The machine shall satisfactorily perform the following test on two workplaces of the size specified as "Capacity" in table I or II, as applicable. The test shall be performed on workplaces of mild steel, having not less than 55,000 PSI tensile strength. The brake shall be properly adjusted, the top leaf shall be equipped with the full length nose bar, the bending leaf shall be fitted with an angle bar, and a 90 degree full length flange having a width of one inch shall be formed on each workpiece. Upon completion of the bending operation, the brake and workplaces shall be examined. The brake shall not be bowed, sprung or have any chipped, cracked or broken components. The finished flanges shall conform to the applicable requirements of 3.6. All performance tests shall be completed without making any adjustments to or performing any maintenance on the machine.

Source: https://assist.dla.mil - Downloaded: 2026-10-19T17:46Z
Check the source to verify that this is the current version before use.

4.6.2.1 Optional Box-Pan test (type II brakes only). When specified (see 4.3, 4.4, and 6.2) type II (Box-Pan) brakes shall be required to perform the following test in addition to the test in 4.6.2. A shallow pan, having a length and width equal to 3/4 of the workpiece bending capacity shown in table II for the size brake to be supplied, and a depth of 2 inches, shall be formal out of sheet metal having a composition as stated in 4.6.2. The finished pan shall be measured for accuracy of the length, width, and height dimensions, and for squareness of all corners. All of the dimensions shall be accurate within +1/16 inch and all formed corners shall be square within an accuracy of +2 degrees. The bends shall show no evidence of "slip" or "creep".

4.6.2.2 Additional performance tests. Performance tests required in addition to or in lieu of the requirements of 4.6.2 shall be as specified and fully described (see 6.2).

4.7 Packaging inspection. Packaging of each item shall be inspected to determine compliance with the requirements of section 5.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-18058.

6. NOTES

6.1 Intended use. The brakes covered by this specification are intended for use in fabricating shops for bending sheet metal.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Type, class, and size required (see 1.2).

c. Issue of DODISS to be cited in the solicitation and, if required, the specific issue of individual documents referenced (see 2.1.1).

d. First article, if required (see 3.1).

e. Additional safety and health requirements, if required (see 3.2.3).

f. Specify configuration of additional point-of-operation guarding, if required (see 3.2.3.1).

g. Specify surface finish requirements, if different (see 3.3.3).

h. Painting, if different (see 3.3.5.).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:46Z
Check the source to verify that this is the current version before use.

i. Removable bottom bar, when required (see 3.4.1).

j. On type II machines only, specify one of the finger length dimensions shown in table II (see 3.4.3.1 and table II).

k. Nose bar type, if different; specify and fully describe type of nose bar required (see 3.4.3.2).

l. Nose bar for type II, if different specify and fully describe nose bar required (see 3.4.3.2).

m. Worklight, if required (see 3.4.3.3)

n. Size and capacity, if different (see 3.5).

o. Specify physical size limitation, if required (see 3.5.1).

p. Additional performance features, if required (see 3.6.7).

q. Specify and fully describe optional equipment, if required (see 3.8).

r. Specify applicable repair parts, if required (see 3.9).

s. Lubrication plate, if required (see 3.10.1).

t. Lubrication plate information, if different (see 3.10.1).

u. Nameplate, if different (see 3.10.2).

v. First article inspection, if different (see 4.3).

w. Quality conformance inspection, if different (4.4).

x. Optional test, if required (see 4.6.2.1).

y. Additional performance tests, if required (see 4.6.2.2).

6.3 Consideration of data requirements. The following data requirements should be considered when this specification is applied on a contract. The applicable Data Item Descriptions (DIDs) should be reviewed in conjunction with the specific acquisition to ensure that only essential data are requested/provided and that the DIDs are tailored to reflect the requirements of the specification acquisition. To ensure correct contractual application of the data requirements, a Contract Data Requirements List (DD Form 1423) must be prepared to obtain the data, except where DOD FAR Supplement 27.475-1 exempts the requirement for a DD Form 1423.

Source: https://assist.dla.mil Downloaded: 2026-10-19T17:46Z
Check the source to verify that this is the current version before use.

Reference Paragraph	DID Number	DID Title	Suggested Tailoring
N/A	DI-TMSS-80527	Commercial Off-The-Shelf (COTS) Manuals	Require all data be in the English Language
N/A	DI-TMSS-80528	Supplemental Data for Commercial Off-The-Shelf (COTS) Manuals	Require all data be in the English Language

The above DIDs were those cleared as of the date of this specification. The current issue of DOD 5010.12-L, Acquisition Management Systems and Data Requirements Control List (AMSDL), must be researched to ensure that only current, cleared DIDs are cited on the DD Form 1423.

6.4 First article. When first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be a first article sample, a first production item, or a standard production item from the contractor's current inventory and the number of items to be tested as specified in 4.3. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.5 Definitions.

6.5.1 Inch-pound units. Inch-pound units are a system of measures based on the yard and pound commonly used in the United States of America and defined by the National Institute of Standards and Technology. Inch-pound units having the same names in other countries may differ in magnitude.

6.6 Cross-reference of classification. Classification changes from the previous issue of this specification are as follows:

MIL-B-23755C	MIL-B-23755D
Type I, class 1, size 616	Deleted
Type I, class 1, size 1018	Deleted
Type I, class 1, size 1222	Deleted
Type I, class 2, size 116	Deleted
Type II, class 1, size 614	Deleted
Type II, class 1, size 814	Deleted
Type II, class 1, size 1214	Deleted
Type II, class 2, size 116	Deleted

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:46Z
Check the source to verify that this is the current version before use.

6.7 Changes from previous issues. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.


6.8 Safety and health requirements. OSHA 29 CFR 1910 limits only the total hazard level (noise, radiation, electromagnetic emissions, noxious vapors, air contaminants and heat) of the environment in which a machine will operate. It does not limit the hazard level of individual machines in an operating environment. The procuring activity should analyze the existing hazard level in the proposed operating environment and specify additional requirements necessary to integrate this new machine into its future environment.

6.9 Training. Training required by the procuring activity should be provided as specified in the contract.

6.10 Warranty. Warranty requirements should be as specified by the procuring activity in the contract.

6.11 Inspection location. The contractor should identify in his response to the solicitation the location where inspection and tests are to be performed.

6.12 Part or Identifying Number (PIN). The PIN to be used for machines acquired to this specification are created as follows:

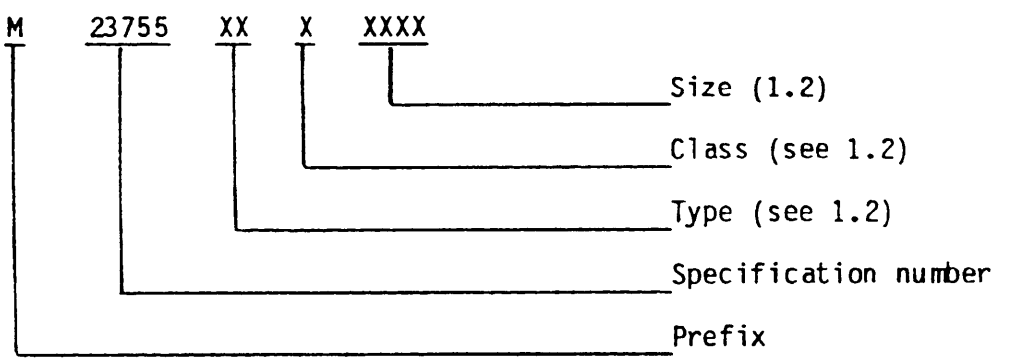

6.13 Subject term Key word listing.

Bending leaf
Box and Pan
Brake
Mild steel
Sheet metal

Source: https://assist.dla.mil - Downloaded: 2026-10-19T17:46Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AL
Air Force - 99

Review activity:
DLA - GS

User activities:
Army - AR
Navy - SH

Preparing Activity:

DLA - IP

Project 3441-0145

Source: https://assist.dla.mil - Downloaded: 2026-10-19T17:46Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:46Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-B-23755D	91 03 29

3. DOCUMENT TITLE
BRAKE MACHINES, SHEET METAL, MANUALLY OPERATED, STANDARD AND BOX-PAN TYPE

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Defense Industrial Plant Equipment Center ATTN: DIPEC-SSG	(1) Commercial (901)775-6694	(2) AUTOVON AV 683-6694
c. ADDRESS (Include Zip Code) 2163 Airways Blvd. Memphis, TN 38114-5051	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T17:46Z
Check the source to verify that this is the current version before use.