
THIS SPECIFICATION IS APPROVED BY THE DEPARTMENT OF THE AIR FORCE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-T-8879

Form Approved
OMB No 0704-0188

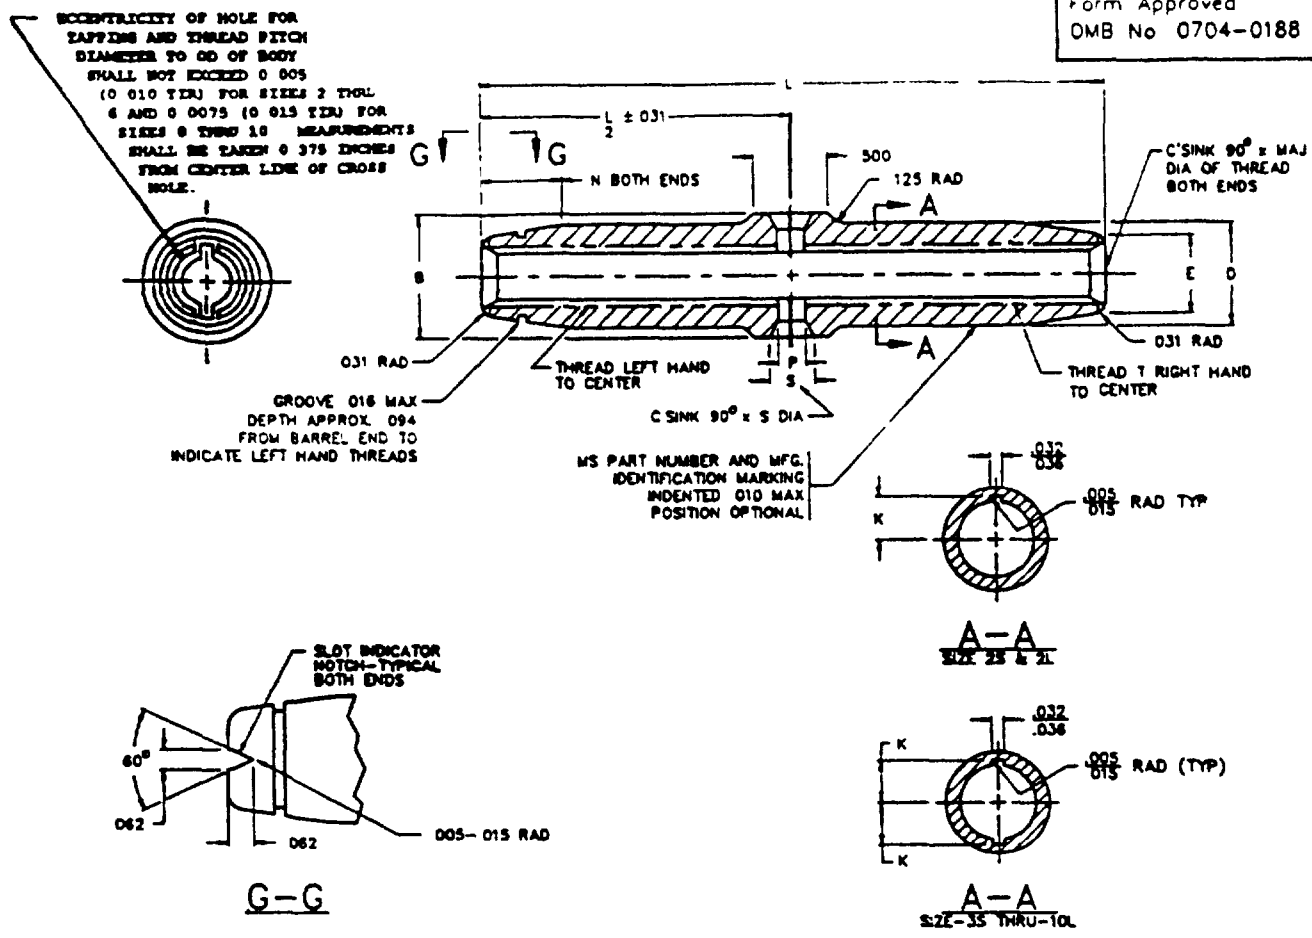

DASH NO.			WIRE ROPE DIA REF	MINIMUM BREAKING STRENGTH LB	THREAD T UNF–3B	L ±.031	S ±.005 DIA	N ±.031	D ±.005 DIA	E ±.005 DIA	K		S DIA	P ±.005	APPLI–CABLE LOCKING CLIP MS21256
STEEL	BRASS	AL									MIN.	MAX.			
2S	B2S	A2S	1/16	800	No. 6–40	2.250	.250	.156	.219	.188	.0749	.0807	187	125	–1
2L	B2L	A2L				4.000									–2
3S	B3S	A3S	3/32	1600	No. 10–32	2.250	.344	.188	.281	250	1009	.1048			–1
3L	B3L	A3L				4.000									–2
5S	B5S	A5S	5/32	3200	1/4–28	2.250	438	.312	391	328	1294	1334			–1
5L	B5L	A5L				4 000									–2
6S	B6S	A6S	3/16	4600	5/16–24	2 250	500	375	438	406	1587	1627			–1
6L	B6L	A6L				4 000									–2
8L	B8L	A8L	1/4	8000	3/8–24		625	.500	.594	469	1900	.1939			–2
9L	B9L	A9L	9/32	12750	7/16–20	4 250	750	594	688	563	2185	2225	250	188	–3
10L	B10L	A10L	5/16	17500	1/2–20		875	656	813	625	2498	2537			

INCH–POUND

PREPARING ACTIVITY 82 CUSTODIANS ARMY– AV NAVY– AS AIR FORCE– 99 DLA– REVIEW USAF – 11 NAVY – PROJECT NUMBER 5340–19 8	MILITARY SPECIFICATION SHEET TITLE TURNBUCKLE BODY CLIP LOCKING	SPECIFICATION SHEET NUMBER MS21251, REV F 27 Apr 95 SUPERSEDING MS21251, REV E, 29 JAN 71 AMSC N A FSC 5340

DISTRIBUTION STATEMENT A APPROVED FOR PUBLIC RELEASE, DISTRIBUTION IS UNLIMITED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:29Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED BY THE DEPARTMENT OF THE AIR FORCE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-T-8878

Form Approved
OMB No 0704-0188

REQUIREMENTS:

DIMENSIONS IN INCHES
UNLESS OTHERWISE SPECIFIED, TOLERANCES DECIMALS ± 010, ANGLES ± 3°.
MATERIAL AND PROTECTIVE TREATMENT. SEE PROCUREMENT SPECIFICATION
SURFACE FINISH SHALL BE RMS 125 OR BETTER.
CYLINDRICAL BARREL HARDNESS SHALL BE AT LEAST ROCKWELL 15T SCALE 75 PER ASTM E140
THREADS SHALL BE IN ACCORDANCE WITH MIL-S-7742
REMOVE ALL BURRS AND SHARP EDGES (SEE PROCUREMENT SPECIFICATION FOR DEFINITION).
BARRELS SHALL SHOW YEAR OF MANUFACTURE
MARKING BY IMPRESSION STAMPING (OR ANY OTHER STRESS INDUCING METHOD), IF USED, SHALL BE DONE BEFORE STRESS RELIEVING.
THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER. LETTER FOLLOWING THE DASH NUMBER INDICATES LENGTH (SHORT OR LONG).

NOTES:

FOR CLIP LOCKING OF TERMINALS AND TURNBUCKLES SEE MS33736.
USE -5 PARTS WITH 1/8 INCH DIAMETER WIRE ROPE, MIN BREAKING STRENGTH 2200 POUNDS (REF).
A TURNBUCKLE WITH A MANUFACTURING DATE OF 1978 OR OLDER SHALL NOT BE USED FOR REPLACEMENT REPAIRS SINCE STRESS RELIEVING WAS NOT REQUIRED PRIOR TO THIS DATE.
EXAMPLE OF PART NUMBER: MS21251-B5S - BARREL, TURNBUCKLE, BRASS, 1/4-28 THREAD, SHORT.
THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REVISION LETTERS ARE NOT USED TO DENOTE CHANGES DUE TO THE EXTENSIVENESS OF CHANGES.

INCH-POUND

PREPARING ACTIVITY 82 CUSTODIANS ARMY- AV NAVY- AS AIR FORCE- 99 DLA- REVIEW USAF - 11 NAVY - ARMY - AV USER NAVY - MC PROJECT NUMBER 5340-1918	MILITARY SPECIFICATION SHEET TITLE TURNBUCKLE BODY CLIP LOCKING	SPECIFICATION SHEET NUMBER MS21251, REV F 27 Apr SUPERSEDING MS21251, REV E, 29 JAN 71 AMSC N/A FSC 5340
DISTRIBUTION STATEMENT A APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED		Page 2 of 2

Source: https://assist.dla.mil -- Downloaded: 2026-01-23 14:24:22
Check the source to verify that this is the current version before use.