
NOTICE: When Gov. and drawings, specifications, or other data ... used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

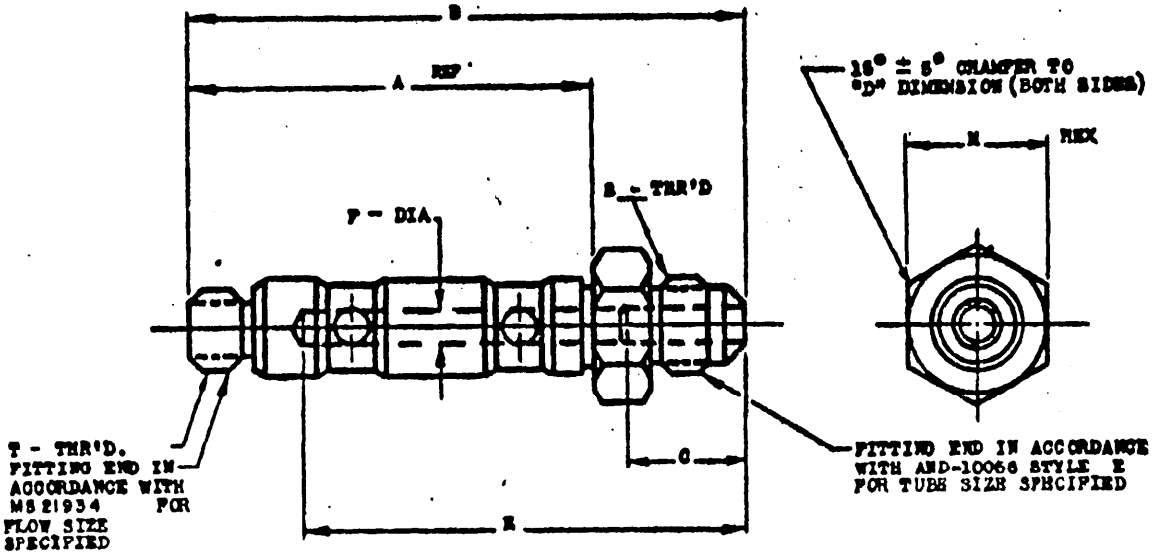

LOW FLOW SIZE MS PART NUMBER	TUBE O.D.	THREAD S (REF)	THREAD T (REF)	A (REF.)	B	C ± .062	D +.000 −.015	E ± .062	F ± .003	M MAX
MS 21951 — 3L	3/16	5/8-24 UNF-3A	7/16-20 UNF-3A	2.531	3.375	------	.621	2.625	.125	.621 .625
MS 21951 — 4L	1/4	7/16-20 UNF-3A	7/16-20 UNF-3A	2.531	3.425	------	.684	2.750	.172	.684 .691
MS 21951 — 5L	5/16	1/2-20 UNF-3A	7/16-20 UNF-3A	2.531	3.487	.750	.746	2.812	.203	.746 .753
MS 21951 — 6L	3/8	9/16-18 UNF-3A	7/16-20 UNF-3A	2.531	3.524	.750	.871	2.812	.203	.871 .878
MS 21951 — 8L	1/2	3/4-16 UNF-3A	7/16-20 UNF-3A	2.531	3.625	.750	.996	2.875	.203	.996 1.003

RIGH FLOW SIZE MS PART NUMBER	TUBE O.D.	THREAD S (REF)	THREAD T (REF)	A (REF.)	B	C ± .062	D +.000 −.015	E ± .062	F ± .003	M MAX
MS 21951 — 6H	3/8	9/16-18 UNF-3A	9/16-18 UNF-3A	2.969	3.962	------	.871	3.187	.297	.871 .878
MS 21951 — 8H	1/2	3/4-16 UNF-3A	9/16-18 UNF-3A	2.969	4.083	------	.996	3.312	.391	.996 1.003
MS 21951 — 10H	5/8	7/8-14 UNF-3A	9/16-18 UNF-3A	2.969	4.164	.937	1.121	3.375	.422	1.121 1.128

MATERIAL: ALUMINUM ALLOY BAR 268 SPECIFICATION QQ-A-268 TEMPER T4 OR TEMPER T4 ARTIFICIALLY AGED.
FINISH: SEE PROCUREMENT SPECIFICATION.
ALL OUTSIDE MACHINED SURFACES 125 MICROINCHES R.M.S. MAX. ALL INSIDE 250 MAX. UNLESS OTHERWISE NOTED.
FITTINGS SHALL BE FREE FROM ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.
DIMENSIONS IN INCHES: UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ± .010, ANGLES ± 1/2°.
INSTALL PER MS 21931

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 15 FEB 1956 REVISED

CUSTODIANS
Navy - BuAer

PROCUREMENT SPECIFICATION
MIL-P-6509

MILITARY STANDARD

BOLT-CLUSTER FITTING DOUBLE PORT-FLARE

MS 21951 (AER)

SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 20260-23T14:42Z
Check the source to verify that this is the current version before use.