
FED. SUP CLASS
3010

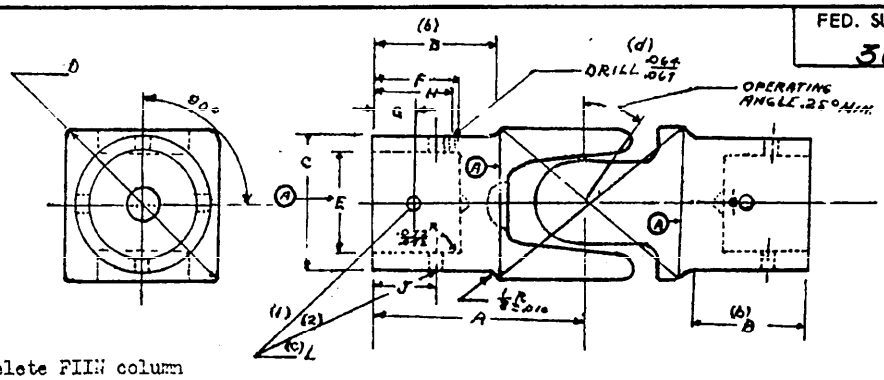

(A) Delete FIIN column

MS PART NO.	NOM SIZE	A	B	C DIA. +.000 -.002	D SWING DIA.	E DIA. +.004 -.001	F	G	H	J	L PILOT HOLE DRILL	WEIGHT MAX. LBS.	STATIC TORQUE MAXIMUM LB. IN
MS24312-12	3/4	1.313	13/16	.745	1 11/16	.625	13/16	.219	.755 / .750	.531	5/32	.20	1500
MS24312-16	1	1.750	1 1/16	.995	1 11/16	.812	1	.281	.942 / .937	.656	7/32	.45	3000
MS24312-20	1 1/4	1.939	1 1/8	1.245	1 3/4	1.062	1 1/16	.312	1.005 / 1.000	.688	7/32	.80	7500
MS24312-24	1 1/2	2.312	1 5/16	1.495	2 1/16	1.250	1 3/16	.344	1.130 / 1.125	.781	9/32	1.25	11000
MS24312-28	1 3/4	2.562	1 11/16	1.745	2 9/16	1.375	1 5/16	.531	1.255 / 1.250	.969	9/32	2.00	15000
MS24312-32	2	2.813	1 15/16	1.995	2 9/16	1.625	1 7/16	.656	1.380 / 1.375	1.094	9/32	3.00	20000

(A) →Delete Reference to Federal Item Identification Number.

(b) B DIMENSION IS LENGTH OF STRAIGHT CYLINDRICAL SECTION

(c) CENTER LINE OF PILOT HOLE (1) SHALL LIE IN A DIRECTION PERPENDICULAR TO THE PIVOT CENTER LINE OF THE YOKE WITHIN 0° 30'.
CENTER LINE OF PILOT HOLE (2) SHALL LIE IN A DIRECTION PARALLEL TO THE PIVOT CENTER LINE OF THE YOKE WITHIN 0° 30'.

(d) CENTER LINE OF INSPECTION HOLE IN EACH YOKE SHALL LIE IN A DIRECTION PARALLEL TO THE PIVOT CENTER LINE OF THE YOKE WITHIN 0° 30'.
(A) →MATERIAL: STEEL, CORBON, IN ACCORDANCE WITh PROCUREMENT SPECIFICATION.
(A) →HARDNESS: ROCKWELL C-40 MAX ON HUB SECTION.
FINISH: CADMIUM PLATING IN ACCORDANCE WITH QQ-P-416, TYPE 1, CLASS 2 ON ALL EXTERNAL SURFACES.
REMOVE ALL BURRS & SHARP EDGES.
DIMENSIONS TYPICAL FOR BOTh YOKES.
ALL DIMENSIONS TO BE MET AFTER PLATING.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ± 1/64, DECIMALS ± .005.
THE TWO YOKES OF THE ASSEMBLED UNIVERSAL JOINT SHALL BE CONCENTRIC TO EACh OTHER WITHIN .015 TIR.

(A) →ALL UNIVERSAL JOINTS SHALL hAVE PREDRILLED PILOT HOLES.
ALL MACHINED SURFACES MUST BE SMOOTh 150 MAX. AND FREE FROM TOOL MARKS.
THIS DOCUMENT hAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

APPROVED 6 FEBRUARY 1956 REVISED (A) 21 SEPTEMBER 1960

P.A. Air Force MOAMA Other Cust Army - TC Navy - BUWEPS	TITLE UNIVERSAL JOINT, ANTIFRICTION BEARING, ROUND HUB	MILITARY STANDARD MS 24312
Procurement Specification MIL-U-3963	SUPERSEDES:	SHEET 1 OF 1

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:51Z
Check the source to verify that this is the current version before use.