This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AV
Navy - EC
Air Force - 99
DLA - ES

User activity: Air Force - 11

DD FORM 672 (Continued/previous editions of this form are obsolete)
AMSC N/A

Preparing activity: Air Force - 85
Other Cust: Army - ER, Navy - AS

Procurement specification: MIL-S-3950

Improvement number

Supersedes

TITLE: SWITCH, TOGGLE, TWO POLE, ENVIRONMENTALLY SEALED


MILITARY STANDARD

MS24524

PAGE 1 OF 3

5930-1358-02

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

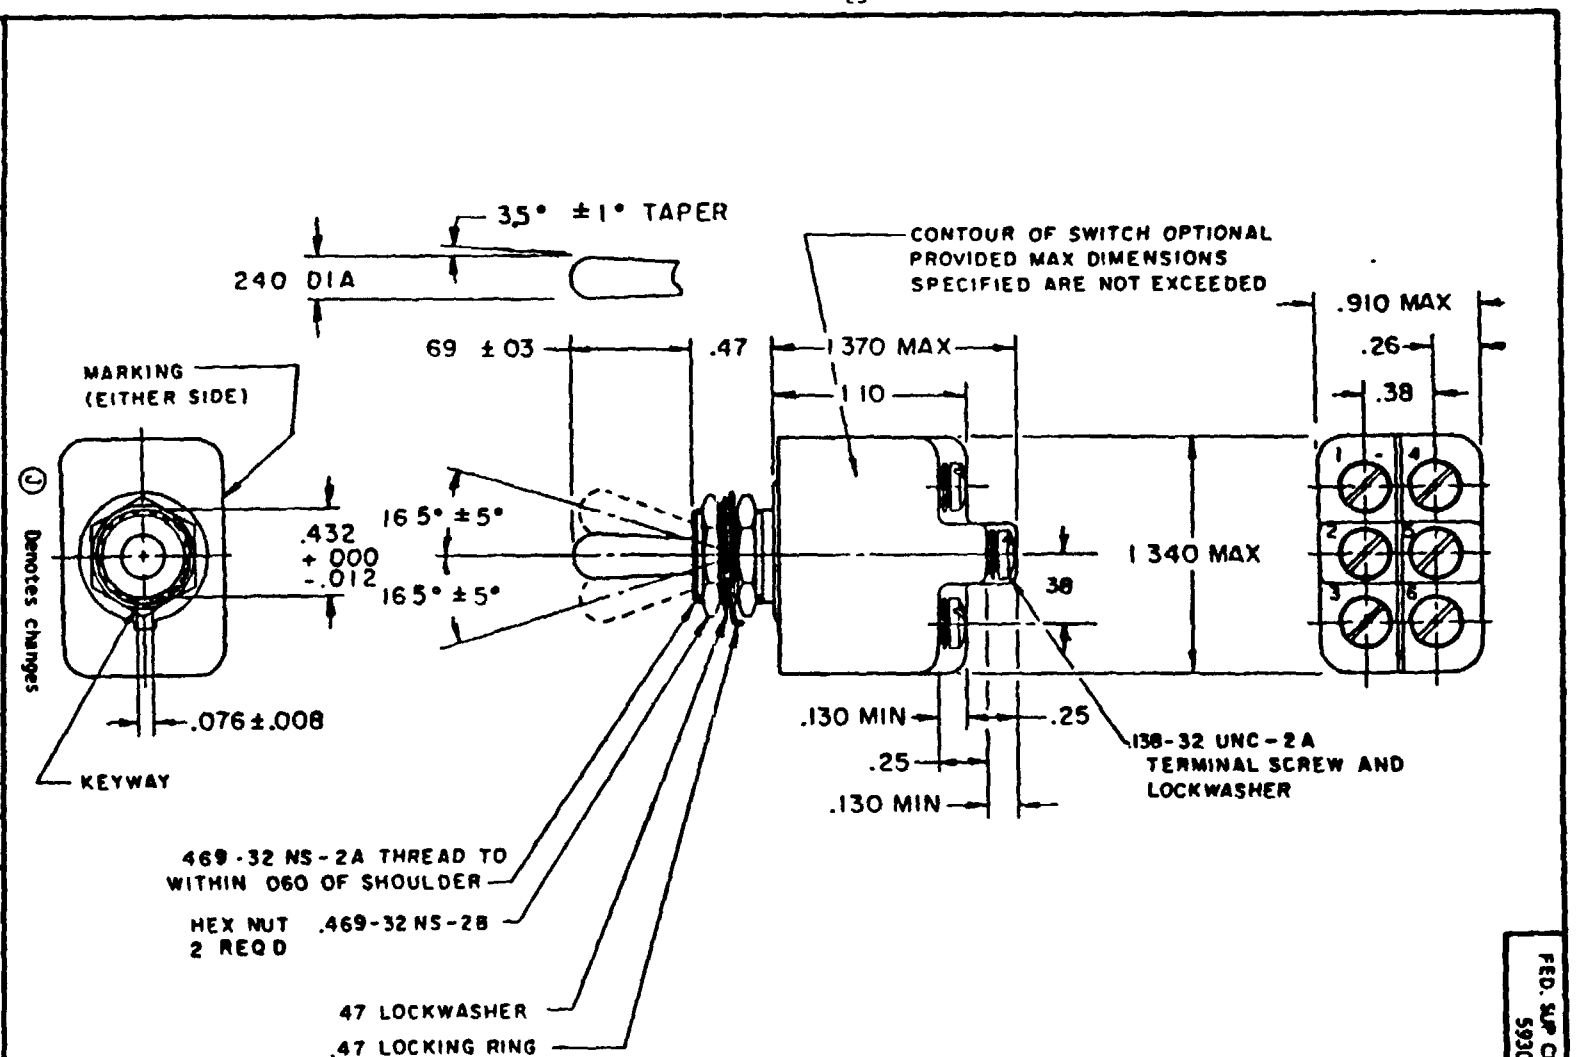

FED. SUP CLASS 5930

APPROVED 31 Jul 1958 REVISED (D) 20 Apr 67 (E) 16 Sep 69 (F) 22 Apr 71 (G) 17 May 77 (H) 17 Mar 78 (J) 28 Sep 87

Source: https://assist.dla.mil -- Downloaded: 202640-23T14:56Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.005	0.13	.25	6.4
.008	0.20	.26	6.6
.012	0.30	.38	9.7
.02	0.5	.432	10.97
.03	0.8	.469	11.91
.060	1.52	.47	11.9
.076	1.93	.69	17.5
.130	3.30	.910	23.11
.138	3.51	1.10	27.9
.240	6.10	1.340	34.04
		1.370	34.80

NOTES
1. Dimensions are inches.
(J)2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.020 (0.51 mm) for two place decimals and ±.005 (0.13 mm) for three place decimals.
4. For hardware and terminal screw detail specifications, see appendix of MIL-S-3950.
5. Thread length and hole depth should be such that screws will not bottom when tightened
6. All switches on this standard are designed so that the movement of the switch mechanism is opposite to that of the toggle lever.
7. Maximum weight is .12 pound.
(J)8. In event of a conflict between the text of this standard and the reference cited herein, the text of this standard shall take precedence.
(J)9. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein

(J) For change see page 2

APPROVED 31 Jul 1958 REVISED

User activity: Air Force - 11

Review activities: Army - AV
Navy - EC
Air Force - 99
DLA - ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Source: https://assist.dla.mil -- Downloaded: 202640-23T14:56Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AV
Navy - EC
Air Force - 99
DLA - ES

User activity: Air Force - 11

DD FORM 1 MAY 73 672 (Coordinated/previous editions of this form are obsolete)

Preparing activity: Air Force - 85
Other Govt Army - ER
Navy - AS

Agency: PA

Procurement Specification: MIL-S-3950

Investigation number:

SUPERSEDES

TITLE: SWITCH, TOGGLE, TWO POLE, ENVIRONMENTALLY SEALED

MILITARY STANDARD

MS24524

PAGE 3 OF 3

FED SUP CLASS 5930

Detail requirements:

MS part number	Circuit with toggle lever in			Current capacity (amperes) 28 volts dc			Current capacity (amperes) 115 volts, 60 and 400 hertz ac		
	Keying side	Center	Opposite keying side	Lamp-load circuit	Resistive circuit	Inductive circuit	Lamp-load circuit	Resistive circuit	Inductive circuit
MS24524-21	1-2 On 4-5	Off	2-3 On 5-6	7	20	15	4	15	15
MS24524-22	Off	None	2-3 On 5-6						
MS24524-23	1-2 On 4-5	None	2-3 On 5-6						
MS24524-24	None	Off	2-3 On 5-6						
MS24524-25	None	Mom. off	2-3 On 5-6	5	18	10	2	11	8
MS24524-26	Mom. 1-2 on 4-5	None	2-3 On 5-6						
MS24524-27	Mom. 1-2 on 4-5	Off	Mom. 2-3 on 5-6						
MS24524-28	Mom. 1-2 on 4-5	Off	None						
MS24524-29	Mom. off	None	2-3 On 5-6						
MS24524-30	Mom. 1-2 on 4-5	None	Off						
MS24524-31	Mom. 1-2 on 4-5	Off	2-3 On 5-6						
MS24524-32	None	1-2 On 4-5	Mom. 2-3 on 5-6						
MS24524-33	None	1-2 On 4-5	2-3 On 5-6	7	20	15	4	15	15

APPROVED 31 Jul 1958 REVISED (J) For changes see page 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:56Z
Check the source to verify that this is the current version before use.