INCH-POUND

MS24697A
w/Amendment 1
21 April 2023
SUPERSEDING
MS24697A
14 July 2005

DETAIL SPECIFICATION SHEET


SPRING, CONNECTOR,
RACK AND PANEL, MINIATURE

Inactive for new design after 8 June 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-83733.

The Qualified Products List (QPL) associated with this inactive for new design specification will be maintained until acquisition of the product is no longer required, where upon the specification and QPL will be canceled.

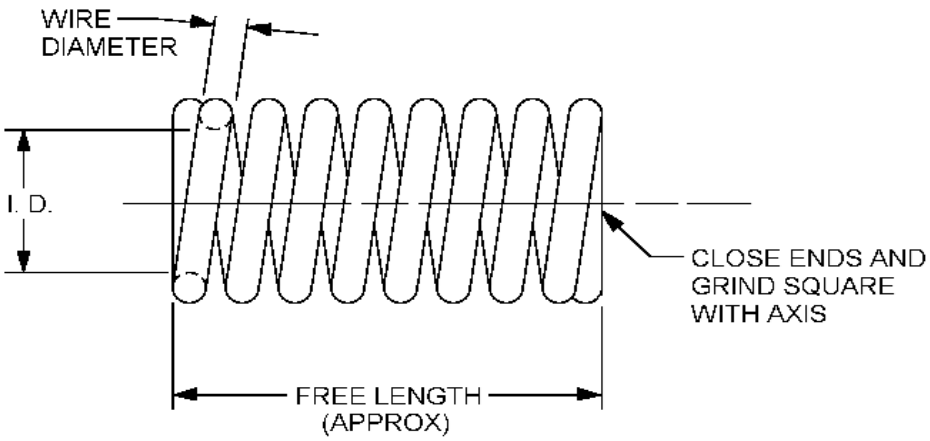

NOTES:
1. All dimensions in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified tolerances are ±.005 inches (0.13 mm).

FIGURE 1. Spring loaded mounting assembly.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:00Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration see figure 1.

Material: Stainless steel spring wire type 631 in accordance with ASTM A313/A313M UNS designator S17700.

No permanent set allowable at solid length, spring must withstand 260°C (500°F) continuously.

Part or identifying number (PIN):

MS PIN	Total coils	Active coils	I.D. +.010 (inches)	Wire Dia. (inches)	Approximate free length (inches)	Spring rate per inch	LBS load at .550 inch
MS24697-1	8 ½	6 ½	.233	.047	.755	47 lbs	9.9 ±5%
MS24697-2	10	8	.230	.040	.875	23 lbs	7.6 ±5%
MS24697-3	11	9	.235	.035	.945	12 lbs	4.8 ±5%

Part or identifying number (PIN) (metric): 1/

MS PIN	Total coils	Active coils	I.D. +0.25 (mm)	Wire Dia. (mm)	Approximate free length (mm)	Spring rate per 25.4 mm	kg load at 13.97 mm
MS24697-1	8 ½	6 ½	5.92	1.19	19.17	21.32 kg	4.49 ±5%
MS24697-2	10	8	5.84	1.02	22.23	10.43 kg	3.45 ±5%
MS24697-3	11	9	5.97	0.89	24.00	5.44 kg	2.18 ±5%

1/ Metric equivalents are given for general information only.

Referenced documents: In addition to MIL-DTL-83733 this document references the following:

ASTM A313/A313M

Amendment notations. The margins of this specification are marked with vertical lines to indicate where modifications from this amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

CONCLUDING MATERIAL

Custodians:
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2023-036)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:00Z
Check the source to verify that this is the current version before use.