
FED. SUP CLASS
5930

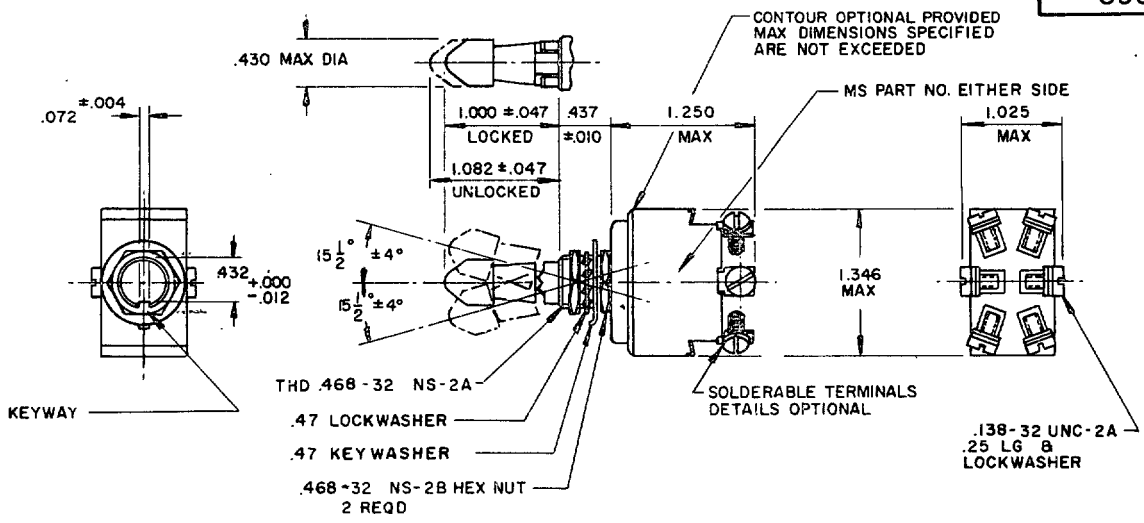

1. FOR HARDWARE AND TERMINAL SCREW DETAIL SPECIFICATIONS SEE SUPPLEMENT OF MIL-S-83731
2. ALL DIMENSIONS ARE IN INCHES.
3. UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ± .020 ON TWO PLACE DECIMALS AND ± .005 ON THREE PLACE DECIMALS.
4. LOCKING MEANS OPTIONAL.

DETAIL REQUIREMENTS:

KEYING SIDE →

A LOCKED IN THREE POSITIONS	B LOCKED IN CENTER POSITION	C LOCKED IN KEYWAY SIDE	D LOCKED OUT OF SIDE OPPOSITE KEYWAY	E LOCKED OUT OF CENTER POSITION	F LOCKED IN CENTER POSITION MOMENTARY EITHER SIDE	G LOCKED OUT OF KEYWAY SIDE MOMENTARY KEYWAY SIDE	H LOCKED OUT OF SIDE OPPOSITE KEYWAY MOMENTARY EITHER SIDE
J LOCKED OUT OF AND INTO SIDE OPPOSITE KEYWAY	K LOCKED IN CENTER POSITION MOMENTARY KEYWAY SIDE	L LOCKED INTO SIDE OPPOSITE KEYWAY MOMENTARY KEYWAY SIDE	M LOCKED OUT OF OPPOSITE KEYWAY MOMENTARY KEYWAY SIDE	N LOCKED OUT OF & INTO SIDE OPPOSITE KEYWAY MOMENTARY KEYWAY SIDE	FIGURES A THRU N DO NOT REPRESENT DETAILS OF CONSTRUCTION. THEY SCHEMATICALLY ILLUSTRATE LOCKING CONFIGURATIONS AND MOMENTARY POSITIONS		

MS PART NO.	LOCKING COMBINATION	CIRCUIT WITH TOGGLE LEVER IN			CURRENT CAPACITY (AMPERES PER POLE) 28 VDC			115 VAC 400 HERTZ		
		OPPOSITE KEYING SIDE	CENTER	KEYING SIDE	LAMP-LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT	LAMP-LOAD CIRCUIT	RESISTIVE CIRCUIT	INDUCTIVE CIRCUIT
MS25126-1	A,B,C,D,E	ON	OFF	ON	7	20	15	4	20	15
-2	C,E		NONE	OFF						
-3				ON						
-4	B,J		OFF	NONE						
-5	L		MOM-OFF							
-6			NONE							
-7	F,H	MOM-ON	OFF	MOM-ON	5	18	10	2	11	8
-8	K	NONE								
-9	L	ON	NONE	MOM-OFF	7	20	15	4	20	15
-10		OFF		MOM-ON	5	18	10	2	11	8
-11	G,K,M,N	ON	OFF							

EXAMPLE OF PART NO. MS25126-B1 - ON OFF ON, TOGGLE SEAL, LOCKED IN CENTER OFF POSITION.

1. ALL SWITCHES ON THIS STANDARD ARE DESIGNED SO THAT THE MOVEMENT OF THE SWITCH MECHANISM IS OPPOSITE TO THAT OF THE TOGGLE LEVER.
2. MAXIMUM WEIGHT IS .15 POUND
3. LOCKING ARRANGEMENT: POSITIVE LOCKING SHALL BE ACCOMPLISHED AND SHALL PREVENT MOTION OF THE TOGGLE LEVER UNTIL THE LOCKING MECHANISM IS MANUALLY RELEASED.
4. THE FORCE REQUIRED TO RELEASE THE LOCKING MECHANISM SHALL BE 3 TO 5 POUNDS.
5. ENDURANCE: ELECTRICAL 10,000 CYCLES
   MECHANICAL 20,000 CYCLES

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATION FOR BID. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

(K) INACTIVE FOR DESIGN AFTER 16 SEP 1969
USE MS24659 OR MS24613

APPROVED 15 DEC 1955 REVISED (D) 20 APRIL 1967 (E) 23 AUG 1968 (F) 16 SEPT 1969 (G) 22 APRIL 1971 (H) 22 MAY 1972 (J) 17 NOV 1972 (K) 15 NOV 80

Reviewer :- AF 11, AV, AS, ES

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A AF 85 Other Cust ARMY - ER NAVY - EC	TITLE SWITCH, TOGGLE, TWO POLE SEALED TOGGLE, LEVER LOCK	MILITARY STANDARD MS25126
PROCUREMENT SPECIFICATION MIL-S-83731	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 63 672-1 (Coordinated) EDITION OF 1 SEP 57 MAY BE USED.

5930-1146-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:04Z
Check the source to verify that this is the current version before use.

Reviewer :- AF 11 , AV, AS, ES

SUPERSEDING NO.	SUPERSEDED NO.
MS25126-A1	MS25126 - 1
MS25126-B1	MS25126 - 2
MS25126-C1	MS25126 - 3
MS25126-D1	MS25126 - 5
MS25126-E1	MS25126 - 7
MS25126-C3	MS25126 - 4
MS25126-E3	MS25126 - 8
MS25126-J4	MS25126 - 9
MS25126-M11	MS25126 - 6

THE SUPERSEDING DASH NUMBERS SUPERSEDE AND ARE INTERCHANGEABLE WITH THE SUPERSEDED DASH NUMBERS.

☆U.S. GOVERNMENT PRINTING OFFICE: 1980 — 703-023/203

APPROVED 15 DEC 1955 REVISED (E) See sheet 2 (F) See sheet 1 (G) See sheets 1 & 2 (H) See sheets 1 & 2 (J) See sheet 1 (K) See sheet 1

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. AF 85 Other Cust ARMY - ER NAVY - EC	TITLE SWITCH, TOGGLE, TWO POLE SEALED TOGGLE, LEVER LOCK	MILITARY STANDARD MS25126
PROCUREMENT SPECIFICATION MIL-S-83731	SUPERSEDES:	SHEET 2

Source: https://assist.dla.mil Downloaded: 2026-10-23T15:04Z
Check the source to verify that this is the current version before use.